

An Overview of Capacitive DC-Links-Topology Derivation and Scalability Analysis

Haoran Wang , *Member, IEEE*, Huai Wang , *Senior Member, IEEE*, Guorong Zhu, *Senior Member, IEEE*, and Frede Blaabjerg , *Fellow, IEEE*

Abstract—Capacitive dc-links are widely used in voltage source converters for power balance, voltage ripple limitation, and short-term energy storage. A typical solution, which uses aluminum electrolytic capacitors for such applications, is assumed to be one of the weakest links in power electronic systems, therefore, also becoming one of the lifetime bottlenecks of power electronic systems. Various passive and active capacitive dc-link solutions have been proposed intending to improve the reliability of the dc-links qualitatively, making great effort to diverting the instantaneous pulsating power into extra reliable storage components. In this paper, a generic topology derivation method for single-phase power converters with active capacitive dc-link integrated has been proposed, which can derive all existing topologies, and identify a few new topologies. According to the synthesis results, the main achievements in research on capacitive dc-link solutions are reviewed and presented chronologically as well as thematically ordered. Furthermore, the reliability-oriented design procedure is applied to size the chip area of active switching devices and the passive components to fulfill a specific lifetime target and system specification, as well as compare the overall capacitive energy storage, energy buffer ratio, and the cost of different solutions. The cost comparisons are performed with a scalable lifetime target and power rating. It reveals that different conclusions can be drawn with different lifetime targets in terms of cost-effectiveness.

Index Terms—Capacitor, dc link, power decoupling, reliability.

I. INTRODUCTION

CAPACITIVE dc-links are widely used in voltage source converters (VSC) for power balancing, voltage ripple limitation, and short-term energy storage. Electrolytic capacitor (E-cap) bank is the good candidate to buffer the pulsating power between the dc and ac side in industry applications due to their relatively high energy density and low cost [1]. However, because of the significant equivalent series resistance (ESR) in the

capacitor, the ripple current flowing pass will introduce higher thermal stress, which will accelerate the degradation process of the E-cap. They are assumed to be one of the weakest links in power electronic systems, and therefore also becoming one of the lifetime bottlenecks in power electronic systems [2]–[5].

Research efforts have been made to either reduce the capacitor ripple current stresses or relax the required dc-link capacitances. The different categories of the capacitive dc-links are shown in Fig. 1, and can be classified into passive and active solutions. Passive capacitive dc-link solutions include passive filters (e.g., additional resonant passive filter to absorb the ripple) [6]–[12], the control strategies for two-stage capacitive dc-link systems, which is relied on a specific relationship in the operating frequency between the converters connected, and the interleave structures based passive filter control methods [13]–[28]. Active capacitive dc-links introduce the additional separate circuit to the existing dc-link. Therefore, extra circuit paths including separate auxiliary circuit and integrated auxiliary circuit are provided to process the pulsating power, which otherwise would be fully processed by the dc-link capacitors. The separate auxiliary circuit could be dc–dc converter [29]–[52], dc–ac converter [53]–[65], or other structures [66]–[92]. The integrated auxiliary circuits are novel single-phase topologies with integrating the active dc-link, such as [93]–[114].

Recently, some review papers have been published to make an overview and comparisons on these capacitive dc-links. Hu *et al.* [115] reviewed the power decoupling techniques to release dc-links for microinverters in photovoltaics (PV) application qualitatively and their work mainly focused on the isolated topologies. Different from that, from the aspect of development and construction laws of power decoupling topologies, Sun *et al.* [116] reviewed the topologies with integrated active dc-link in both current source and VSC. They classified these solutions into independent and dependent topologies and found out that several independent topologies can be derived from dependent topologies by sharing the common switches and passive components. The latest publication by Vitorino *et al.* [117] presented a comprehensive overview, which covers the isolated and nonisolated cases, voltage and current sources, and considering control and circuits. Although the review papers on the active dc-links have the above potential benefits, there are the following limitations of the existing studies on active capacitive dc-links methods.

- 1) Even though Hu *et al.* [115], [116], and [117] have reviewed and listed these methods, the derivation of these

Manuscript received March 3, 2019; accepted May 20, 2019. Date of publication May 30, 2019; date of current version November 12, 2019. This work was supported in part by the Innovation Fund Denmark through the Advanced Power Electronic Technology and Tools Project and in part by the National Natural Science Foundation of China under Grant 51777146. This paper was presented in part at the 2016 IEEE Energy Conversion Congress and Exposition and 2016 IEEE 8th International Power Electronics and Motion Control Conference, sponsored by Power Electronics Society. Recommended for publication by Associate Editor M. Ferdowsi. (*Corresponding authors: Huai Wang.*)

Haoran Wang, Huai Wang, and F. Blaabjerg are with the Department of Energy Technology, Aalborg University, Aalborg 9220, Denmark (e-mail: hao@et.aau.dk; hwa@et.aau.dk; fbl@et.aau.dk).

G. Zhu is with the School of Automation, Wuhan University of Technology, Wuhan 430070, China (e-mail: zhgr_55@whut.edu.cn).

Color versions of one or more of the figures in this paper are available online at <http://ieeexplore.ieee.org>.

Digital Object Identifier 10.1109/TPEL.2019.2920257

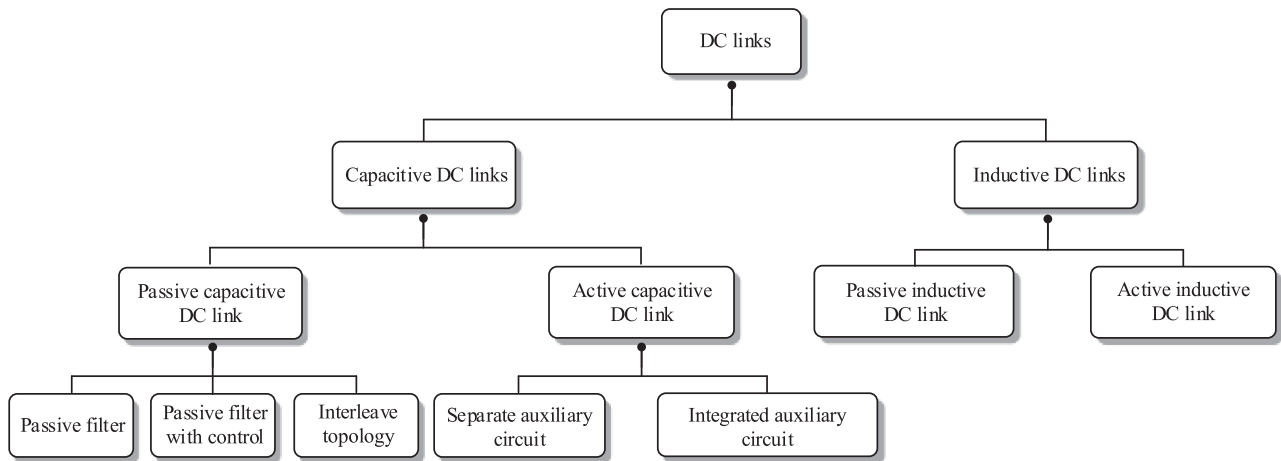


Fig. 1. Categorization of dc links in power electronic systems.

novel topologies is not clear. It is worth to be deeply investigated, because it can illustrate the essence of these single-phase topologies with active dc-link and maybe provide more possibilities.

- 2) There is still a lack of quantitative reliability analysis of the system with active dc-link. The reliability improvement of the dc-link capacitor itself (i.e., by reducing its ripple current stress or replacement by a more reliable alternative) does not necessarily imply the improvement of the overall system, since active switches and other components are added with the active capacitive dc-links. The lifetime of other components may therefore be changed.
- 3) It is still an open question to conclude, which active capacitive dc-link is the most promising one. Existing comparative studies are based on either the number of components used, different case studies, or different criteria to size the components [115]–[117]. No assessment of the existing active capacitive dc-links based on a specific case is done for a given lifetime target and the same component sizing criteria.

In order to deeply investigate the original ideas of these capacitive dc-link solutions, this paper proposes a generic topology derivation method to synthesis single-phase converter with integrated auxiliary circuit, which can review all the existing single-phase topologies with active dc-link integrated [118]. Based on the synthesis results, the main achievements in research on capacitive dc-link solutions are reviewed and presented chronologically and thematically ordered, so as to clearly understand the development trend of the capacitive dc-link solutions. Moreover, an assessment approach of active capacitive dc-links is proposed based on the overall cost of the respective solution to fulfill the same specifications in terms of functionality and lifetime [119]. The methods studied will be also applicable also to three-phase systems with unbalanced grids or loads [120] (i.e., there will be low-frequency harmonics, requiring large size capacitors).

The structure of this paper is as follows: Section II discusses the generic topology derivation method and the cases studied, followed by the summary of the main achievements in Section III. Section IV presents the proposed cost-benchmarking based on a reliability-oriented component sizing procedure;

then, the cost-benchmarking and scalability analysis are presented in Section V. Section VI presents the benchmarking from energy storage aspect. Section VII discusses the limitations in this study and the future challenges, followed by the conclusions in Section VIII.

II. GENERIC TOPOLOGY DERIVATION METHOD FOR A SINGLE-PHASE CONVERTER WITH CAPACITIVE ACTIVE DC-LINKS

Through the power flow analysis, four general structures for decoupling the pulsating power at ac and dc sides can be obtained to provide an additional power flow path from the main circuit to the active energy storage elements. Based on the general structures, four synthesis modes to combine the main circuit and auxiliary circuit are presented, followed by enumerating all the possible topologies. In order to reduce the component count, the main circuit and the active capacitive dc-link circuit could share common elements in some of the derived topologies, which will be discussed later with examples.

A. Power Flow Analysis

The ac voltage $v_{ac}(t)$ and current $i_{ac}(t)$ are assumed to be sinusoidal with unity power factor, as shown in the following equations:

$$v_{ac}(t) = V_m \sin(\omega t) \quad (1)$$

$$i_{ac}(t) = I_m \sin(\omega t) \quad (2)$$

where V_m and I_m are the amplitude of ac voltage and current, respectively; and ω is the supply angular frequency. Limit in the discussion to low-frequency harmonics, the power of the ac side can be expressed as follows:

$$p_{ac}(t) = v_{ac}(t)i_{ac}(t) = \frac{V_m I_m}{2} - \frac{V_m I_m}{2} \cos(2\omega t). \quad (3)$$

There are two parts in (3), the first part is the dc power supplied by the dc source P_{dc} and the second part is the instantaneous unbalanced power $p_{2\omega}(t)$, which needs a storage component to buffer, such as inductor, capacitor, and source (battery).

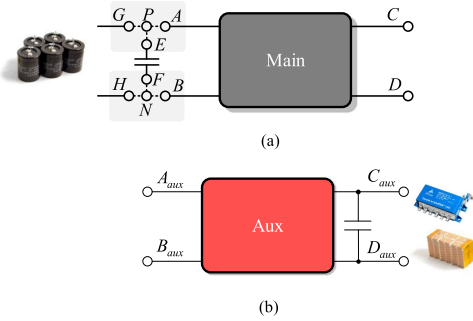


Fig. 2. Basic module for the main circuit and the auxiliary circuit. (a) Main circuit. (b) Auxiliary circuit.

- 1) Capacitor: Film capacitor and ceramic capacitor, which are widely used for power decoupling because of the great current capability [3].
- 2) Inductor: Magnetic components are much more reliable and feature low failure rates that are more than one order of magnitude lower than those of the other power devices, but the high power loss and large volume/weight limit their extensive use [2].
- 3) Source: Battery can also be used for power decoupling and long hold-up time support.

Focus in this paper is on the capacitor as the energy storage element in order to buffer the pulsating power. Inductor and battery as storage component can replace the film capacitor for specific dc-link applications with similar design procedure, which is not discussed in this paper.

For passive capacitive dc-links, E-caps are usually used to filter low-frequency ripple current components, and additional capacitors with higher resonant frequency (e.g., film capacitors and ceramic capacitors) are usually used to assist the filtering of the high-frequency ripple current components. The one used for low-frequency ripple current filtering is the dominant one in terms of capacitance. An alternative solution is to use single-type of capacitors, such as film capacitors, or ceramic capacitors to filter both low-frequency and high-frequency ripple current components. For active dc-link solutions, additional active circuits (or modulation schemes) are mainly used to supply or absorb low-frequency power components due to the limitation of controller bandwidth. Capacitors for high-frequency ripple components filtering are still required in the dc-link of the power electronic converter.

B. General Structure

Fig. 2 defines the terminals of the main circuit of a single-phase power converter and the auxiliary circuit used for the active capacitive dc-link. There are ports AB and CD for the main circuits, and $A_{aux}B_{aux}$ and $C_{aux}D_{aux}$ for the auxiliary circuits. AB and CD could either be alternating current (ac) or direct current (dc), depending on the applications. For illustration, Fig. 2 shows an inverter application case. EF and GH are the terminals of the dc-link capacitor and the input of the main circuit, respectively. Typically, without any auxiliary circuit, G, E, A are connected to P and the same to the terminal H, F, B, N .

By analyzing the possible flowing paths of the pulsating power, the general structures for a single-phase system with an auxiliary circuit can be divided into four types: dc series, dc parallel, ac series, and ac parallel.

1) *DC Series*: In the dc series structure, the auxiliary circuit and the main circuit are connected in series at the dc side in order to compensate the voltage distortion of the dc-link capacitor. From the basic module shown in Fig. 2, it can be seen that there are three ways to connect the auxiliary circuit in series with the dc port of the main circuit. Taking the positive side terminals as an example, the three connected locations are PA at converter side, PE at the capacitor side, and PG at the input side as shown in Fig. 3(a), (b), and (c), separately, in order to keep each side constant. It is worth to mention that two auxiliary circuits are required at PA and PG if it is necessary to limit the voltage ripples at both the input side and the converter side.

With the responsibility to decouple the unbalanced power, the auxiliary circuit can either be the ac–dc, which contains only ac component at the $A_{aux}B_{aux}$ or the dc–dc and dc–ac converter, which contain both dc and ac components. In such ac–dc auxiliary circuit application, the voltage across $A_{aux}B_{aux}$ has the inverse ripple component of the dc-link capacitors in a single-phase system, so the average dc-link voltage of the single-phase system is constant. However, in dc–dc and dc–ac applications, except for an ac component, there will be a dc component in the $A_{aux}B_{aux}$ port of an auxiliary circuit.

2) *DC Parallel*: This structure inserts an auxiliary circuit connected in parallel to the dc-link capacitors, which will introduce a new flowing path for the ripple current at the dc-link. The voltage of the input port $A_{aux}B_{aux}$ of the auxiliary circuit is clamped by the dc-link. Thus, the auxiliary circuit can be dc–ac or dc–dc converters with a dc input. Terminal G, E, A are connected to P and the same to the terminal H, F, B, N as defined in Fig. 3(d).

3) *AC Series*: The auxiliary circuit is connected in series with the ac side of the main circuit, as shown in Fig. 3(e).

4) *AC Parallel*: The auxiliary circuit is connected in parallel with the ac side of the main circuit. It has the similar function as an active power filter in order to eliminate the harmonics at the ac side. The voltage of the $A_{aux}B_{aux}$ port is clamped by the ac voltage of the main circuit. Thus, the topologies of the auxiliary circuit is ac–dc as shown in Fig. 3(f).

C. Synthesizing From General Structures

The original cells for a single-phase system with active capacitive dc-links are the main circuit and the auxiliary circuit. In order to reduce the component count and derive more possible topologies with active capacitive dc-links, a topology synthesis, which links the output terminals of the auxiliary circuit to the main circuit, is presented. Because of some novel connections for power flowing, more possibilities to share the common cells for higher power density will be provided. Following the general structure for a single-phase system with the auxiliary circuit integrated presented above, four kinds of synthesis modes are presented in Fig. 4 and this can be used for the topology derivation.

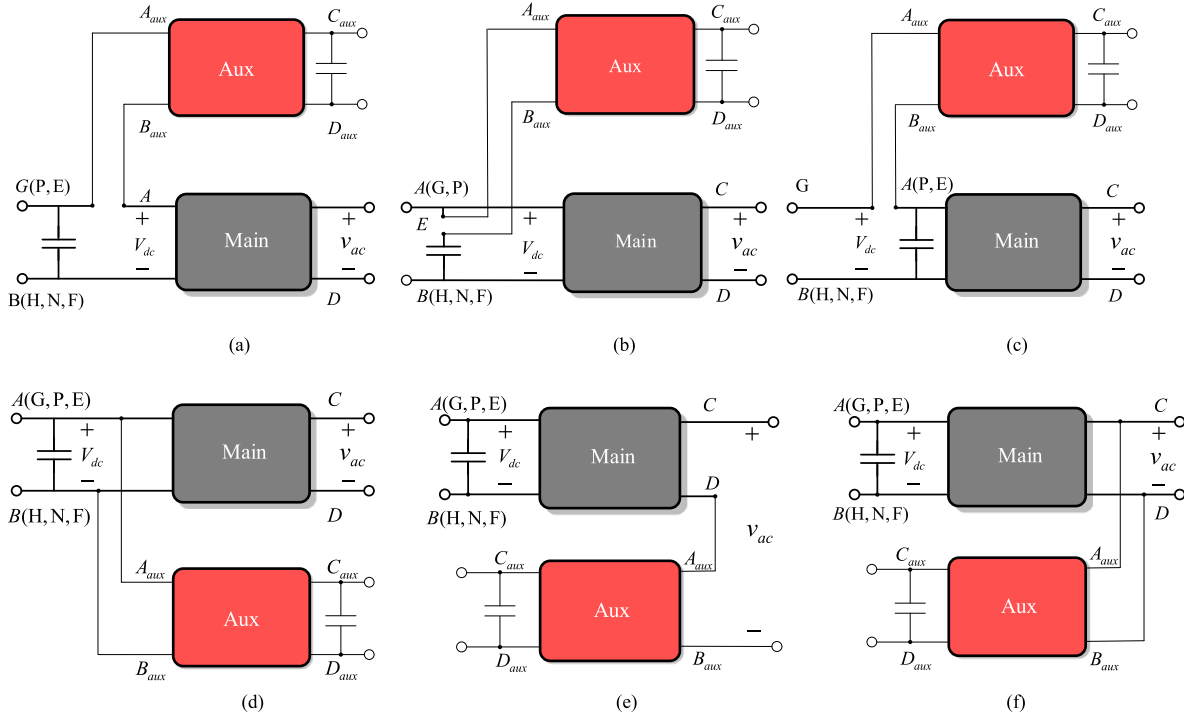


Fig. 3. Structure diagrams of the auxiliary circuit connected with the main circuit. (a) Connect the auxiliary circuit in series with the dc side of the main circuit (converter side). (b) Connect the auxiliary circuit in series with the dc side of the main circuit (capacitor side). (c) Connect the auxiliary circuit in series with the dc side of the main circuit (input side). (d) Connect the auxiliary circuit in parallel with the dc side of the main circuit. (e) Connect the auxiliary circuit in series with the ac side of the main circuit. (f) Connect the auxiliary circuit in parallel with the ac side of the main circuit.

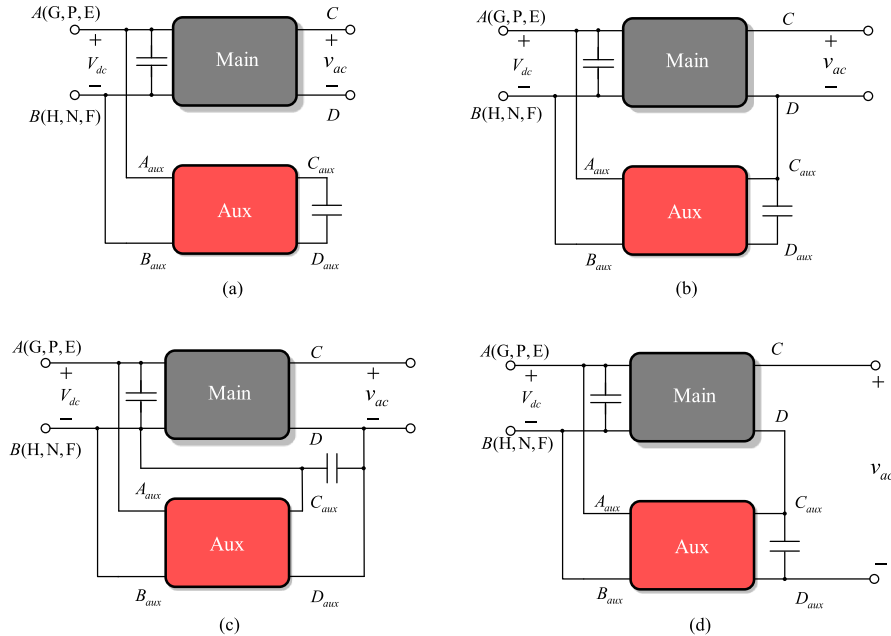


Fig. 4. Synthesis modes for the dc parallel case shown in Fig. 3 (d). (a) Hang mode. (b) Float mode. (c) Parallel mode. (d) Series mode.

- 1) Hang mode: Hang up the $C_{aux}D_{aux}$ port without any connection.
- 2) Float mode: Connect one terminal of the energy storage element to one of the terminals of the main circuit.
- 3) Parallel mode: Connect two terminals of the energy storage element and two terminals of the main circuit together.

- 4) Series mode: Link the energy storage element in series with one of the terminals of the main circuit.

D. Topology Simplification

The objective of the topology simplification is to reduce the component count in synthesis structure. An example to illustrate

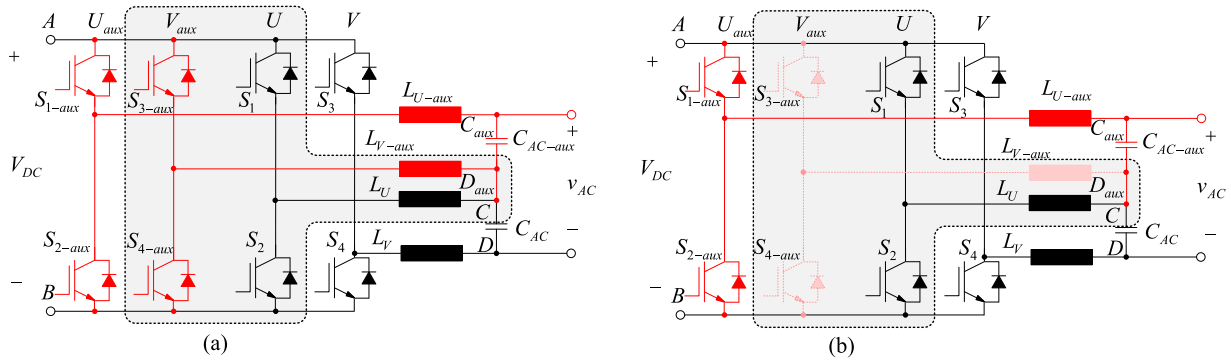


Fig. 5. Example of synthesis optimization based on full-bridge converters. (a) Synthesis topologies based on full-bridge converters. (b) Synthesis optimization.

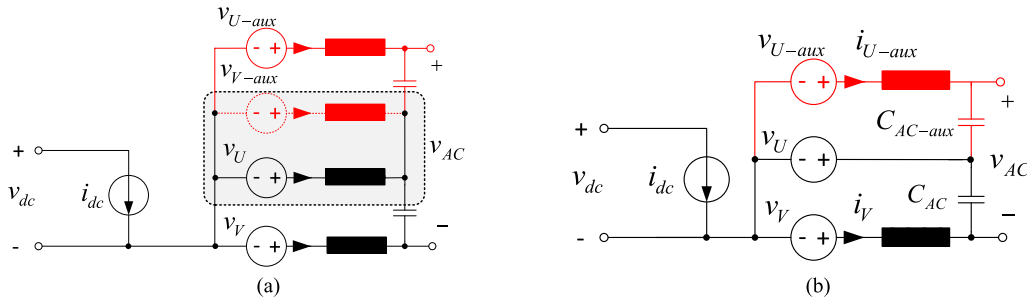


Fig. 6. Average model of the example of synthesis optimization. (a) Synthesis topologies based on full-bridge converters. (b) Synthesis optimization.

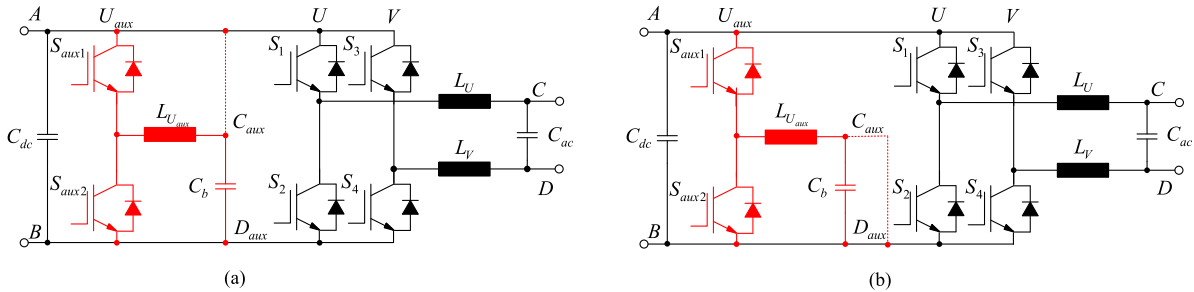


Fig. 7. Two topology examples that do not work following the principle in synthesis procedure. (a) Switch short circuited. (b) Capacitor short circuited.

the simplification procedure can be seen in Figs. 5 and 6. The black and red line are the main circuit and auxiliary circuit, respectively. The dashed line is shared by a common cell. A step-by-step topology simplification procedure is discussed as follows.

- 1) First, the full-bridge inverter as the main circuit with another full-bridge inverter as the auxiliary circuit are taken as an example. $A_{aux}B_{aux}$ port of the auxiliary circuit paralleled with the dc-link of the main circuit and $C_{aux}D_{aux}$ port series with one of ac terminals of main circuit are used in this example, as shown in Fig. 4(d).
- 2) The topology has four legs as shown in Fig. 5. Each switching leg generates a square-wave voltage from the dc-link. From the average model shown in Fig. 6, it can be seen that the legs V_{aux} and U have the same structure and the common dc-link input and output terminals CD_{aux} .

- 3) Merge the leg V_{aux} into the leg U of the main circuit. The common switching cells and filter inductors can be shared by the main circuit and the auxiliary circuit.
- 4) The ac port voltage of the single-phase conversion system is not the ac voltage of main circuit, but the sum of the output voltages of the main circuit and the auxiliary circuit. Thus, the modulation strategy for the single-phase system must be changed, where the difference between the middle voltages of the leg U_{aux} and leg V is the ac voltage of the single-phase system.

A more general description of the topology simplification from the aforementioned analysis is as follows.

- 1) Select two topologies with one of the general structures to establish an additional power flow path for the pulsating power.
- 2) Check the possibility to share components (e.g., bridge legs) between the main circuit and the auxiliary circuit.

TABLE I
SYNTHESIS RESULTS WITH DC PARALLEL MODE

| Main circuit topology (black) | | Full-bridge | | | | | |
|----------------------------------|---------------------------------------|-------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| Auxiliary circuit topology (red) | | Full-bridge | Half-bridge | Buck | Boost | Buck-boost | |
| Hang mode | 1 | A 1A | B 1B | C 1C | D 1D | E 1E | |
| | | | | | | | |
| Float mode | A-C _{aux} | 2 | switch short circuit | cap short circuit | switch short circuit | switch short circuit | switch short circuit |
| | A-D _{aux} | 3 | switch short circuit | switch short circuit | 1C | 1D | 1E |
| | B-C _{aux} | 4 | switch short circuit | cap short circuit | switch short circuit | switch short circuit | switch short circuit |
| | B-D _{aux} | 5 | switch short circuit | switch short circuit | 1C | 1D | 1E |
| | C-C _{aux} | 6 | 6A | 6B | 6C | switch short circuit | switch short circuit |
| | | | | | | | |
| | C-D _{aux} | 7 | 6A | 7B-a 7B-b | 1C | 1D | 1E |
| | | | | | | | |
| | D-C _{aux} | 8 | 6A | 6B | 6C | switch short circuit | switch short circuit |
| D-D _{aux} | 9 | 6A | 7B | 1C | 1D | 1E | |
| Parallel mode | A-C _{aux} B-D _{aux} | 10 | switch short circuit | cap short circuit | switch short circuit | switch short circuit | switch short circuit |
| | A-C _{aux} C-D _{aux} | 11 | switch short circuit | cap short circuit | switch short circuit | switch short circuit | switch short circuit |
| | A-C _{aux} D-D _{aux} | 12 | switch short circuit | cap short circuit | switch short circuit | switch short circuit | switch short circuit |
| | B-C _{aux} A-D _{aux} | 13 | switch short circuit | cap short circuit | switch short circuit | switch short circuit | switch short circuit |
| | B-C _{aux} C-D _{aux} | 14 | switch short circuit | cap short circuit | switch short circuit | switch short circuit | switch short circuit |
| | B-C _{aux} D-D _{aux} | 15 | switch short circuit | cap short circuit | switch short circuit | switch short circuit | switch short circuit |
| | C-C _{aux} A-D _{aux} | 16 | switch short circuit | switch short circuit | switch short circuit | switch short circuit | switch short circuit |
| | C-C _{aux} B-D _{aux} | 17 | switch short circuit | switch short circuit | 6C | switch short circuit | switch short circuit |
| | C-C _{aux} D-D _{aux} | 18 | switch short circuit | 7B | switch short circuit | switch short circuit | switch short circuit |
| | D-C _{aux} A-D _{aux} | 19 | switch short circuit | switch short circuit | switch short circuit | switch short circuit | switch short circuit |
| | D-C _{aux} B-D _{aux} | 20 | switch short circuit | switch short circuit | 6C | switch short circuit | switch short circuit |
| | D-C _{aux} C-D _{aux} | 21 | switch short circuit | 7B | switch short circuit | switch short circuit | switch short circuit |
| Series mode | A-C _{aux} P-D _{aux} | 22 | switch short circuit | switch short circuit | switch short circuit | switch short circuit | switch short circuit |
| | A-D _{aux} P-C _{aux} | 23 | switch short circuit | switch short circuit | switch short circuit | switch short circuit | switch short circuit |
| | B-C _{aux} N-D _{aux} | 24 | switch short circuit | switch short circuit | switch short circuit | switch short circuit | switch short circuit |
| | B-D _{aux} N-C _{aux} | 25 | switch short circuit | switch short circuit | 25C | 25D | 25E |
| | | | | | | | |
| | E-C _{aux} P-D _{aux} | 26 | switch short circuit | switch short circuit | switch short circuit | switch short circuit | switch short circuit |
| | E-D _{aux} P-C _{aux} | 27 | switch short circuit | switch short circuit | switch short circuit | switch short circuit | switch short circuit |
| | F-C _{aux} N-D _{aux} | 28 | switch short circuit | switch short circuit | 1B | 28D | 28E |
| | | | | | | | |
| | F-D _{aux} N-C _{aux} | 29 | switch short circuit | switch short circuit | switch short circuit | switch short circuit | switch short circuit |
| | G-C _{aux} P-D _{aux} | 30 | switch short circuit | switch short circuit | switch short circuit | switch short circuit | switch short circuit |
| | G-D _{aux} P-C _{aux} | 31 | switch short circuit | switch short circuit | switch short circuit | switch short circuit | switch short circuit |
| | H-C _{aux} N-D _{aux} | 32 | switch short circuit | switch short circuit | 25C | 25D | 25E |
| | H-D _{aux} N-C _{aux} | 33 | switch short circuit | switch short circuit | switch short circuit | switch short circuit | switch short circuit |
| | C-C _{aux} | 34 | 34A | 34B | switch short circuit | switch short circuit | switch short circuit |
| | | | | | | | |
| C-D _{aux} | | 35 | 35A | 35B-a 35B-b | switch short circuit | switch short circuit | switch short circuit |
| | | | | | | | |
| D-C _{aux} | 36 | 36A | 35B | switch short circuit | switch short circuit | switch short circuit | |
| D-D _{aux} | 37 | 37A | 35B | switch short circuit | switch short circuit | switch short circuit | |

TABLE II
SYNTHESIS RESULTS WITH DC SERIES MODE

| | | | | | | | |
|----------------------------------|------------------------------|-------------|---------------|-------|------------|---------------|-------------|
| Main circuit topology (black) | Full-bridge | | | | | | |
| Auxiliary circuit topology (red) | DC-AC circuit | | DC-DC circuit | | | AC-DC circuit | |
| | Full-bridge | Half-bridge | Buck | Boost | Buck-boost | Full-bridge | Half-bridge |
| Hang mode | A | B | C | D | E | F | G |
| | 38A | 38B | 38C | 38D | 38E | 38F | 38G |
| Float mode | No common cell can be shared | | | | | | |
| Parallel mode | | | | | | | |
| Series mode | | | | | | | |

(a) Connect the auxiliary circuit in series with the DC side of the main circuit (Converter side).

| | | | | | | | |
|----------------------------------|------------------------------|-------------|---------------|-------|------------|---------------|-------------|
| Main circuit topology (black) | Full-bridge | | | | | | |
| Auxiliary circuit topology (red) | DC-AC circuit | | DC-DC circuit | | | AC-DC circuit | |
| | Full-bridge | Half-bridge | Buck | Boost | Buck-boost | Full-bridge | Half-bridge |
| Hang mode | A | B | C | D | E | F | G |
| | 42A | 42B | 42C | 42D | 42E | 42F | 42G |
| Float mode | No common cell can be shared | | | | | | |
| Parallel mode | | | | | | | |
| Series mode | | | | | | | |

(b) Connect the auxiliary circuit in series with the DC side of the main circuit (Capacitor side).

- 3) If it is applicable, integrate the components that can be shared by the main circuit and the auxiliary circuit.
- 4) Exclude the circuit topologies that do not work in principle.
- 5) Check the controllability for single-phase conversion and rebuild the modulation strategy to ensure the circuit are fully controllable.

It should be noted that some topologies derived from the synthesis method do not work in principle. Two examples are shown in Fig. 7. In Fig. 7(a), when we connect terminals A and C_{aux} , the energy storage element is connected in parallel with the dc-link directly. The voltage of the capacitor cannot be controlled by the power semiconductors in the auxiliary circuit. Moreover, the inductor in the auxiliary circuit is a filter inductor, which has limited energy storage capability, so the S_{aux1} is short circuited. In Fig. 7(b), the terminal C_{aux} and B are connected, which makes the energy storage capacitor short circuit.

E. Topology Synthesis Cases

Following the proposed topology synthesis process, the full bridge is taken as an example for the main circuit topology.

TABLE III
SYNTHESIS RESULTS WITH AC PARALLEL MODE



| | | |
|----------------------------------|--|---|
| Main circuit topology (black) | Full-bridge | |
| Auxiliary circuit topology (red) | Full-bridge | Half-bridge |
| | A | B |
| Hang mode | 46A | 46B |
| |  |  |
| Float mode | No common cell can be shared | |
| Parallel mode | | |
| Series mode | | |

TABLE IV
SYNTHESIS RESULTS WITH AC SERIES MODE

| Main circuit topology (black) | Full-bridge | | | | | | |
|----------------------------------|---------------|------------------------------|---------------|-------|------------|---------------|-------------|
| Auxiliary circuit topology (red) | DC-AC circuit | | DC-DC circuit | | | AC-DC circuit | |
| | Full-bridge | Half-bridge | Buck | Boost | Buck-boost | Full-bridge | Half-bridge |
| | A | B | C | D | E | F | G |
| | 50A | 50B | 50C | 50D | 50E | 50F | 50G |
| Hang mode | 50 | | | | | | |
| Float mode | 51 | No common cell can be shared | | | | | |
| Parallel mode | 52 | | | | | | |
| Series mode | 53 | | | | | | |

Full-bridge, half-bridge, buck, boost, and buck–boost converters are taken as the auxiliary circuits connected in parallel or series at the dc or ac side. The synthesis results of the dc parallel, dc series, ac parallel, and ac series are shown below separately.

1) *DC Parallel*: The synthesis results of the dc parallel cases are shown in Table I. There exist 20 derived topologies excluding the ones that do not work in principle. Actually, the half-bridge inverter as the main topology with these auxiliary circuits have also been taken into account, and all the topologies with component reduced have been included in the above examples.

As there are common cell in parallel with the dc-link, most of the existing topologies mentioned in recent papers belong to this synthesis mode. As shown in Table I, the topologies 1A, 1B, 1C, 1D, and 1E include a full-bridge converter [53], a half-bridge converter [60], a buck converter [44], a boost converter [35], and a buck–boost converter [50] as the auxiliary circuit connected in parallel with the dc-link, respectively. Some topologies can share the common cell between the main circuit and the auxiliary circuit, such as 6A [95], 7B [112], 6C [111], and 34A [93]. All of these typical topologies will be evaluated in following section.

2) *DC Series*: For the converter side cases, the synthesis results can be seen in Table II(a). When the auxiliary circuit is dc–ac or dc–dc topology, besides an ac component, there will be a dc component in $A_{aux}B_{aux}$, which will lower the voltage utilization ratio of the main circuit. Here, the five auxiliary circuits with dc input are taken as examples to derive the topologies as presented in Table II. By sharing the common cells at the dc-link, the topology 38A can be derived, which has been proposed in [105]. When the auxiliary circuit is ac–dc topology, the voltage of $A_{aux}B_{aux}$ has the inverse voltage waveform with the ripple component of the dc-link capacitor, in order to achieve a constant dc-link voltage. The full-bridge inverter for the main circuit and the full-bridge and half-bridge converters for auxiliary circuits are taken as examples to synthesis a single-phase topology with integrated active dc-link.

Except for the hang up mode, no more single-phase topology with integrated auxiliary circuits can be obtained, because there


is no common cell that can be shared at the dc-link. Similar synthesis results can be found for capacitor side cases as shown in Table II(b).

3) *AC Parallel*: In this case, the auxiliary circuit is connected in parallel with the ac side of the single-phase inverter [121]. The derived topologies are shown in Table III. Since no common cell can be shared, no more novel topologies can be derived.

4) *AC Series*: Different from the above three modes whose ac side voltage is CD , the ac voltage of the conversion system becomes the sum of CD and $A_{aux}B_{aux}$. The derived topologies are shown in Table IV with a full-bridge inverter as the main circuit and various auxiliary circuits. In this section, the output voltage of the main circuit contains other ac or dc components besides the fundamental component. Thus, the CD port of the main circuit is different from the traditional one. The auxiliary circuit could be ac–dc topologies or dc–dc (dc–ac) topologies. One of the cases proposed in [91] connects a buck converter in series with the ac side, whereas the topology and modulation strategy for the main circuit need to be changed.

III. MAIN ACHIEVEMENTS OF CAPACITIVE DC-LINK RESEARCH

In the academic community, research on the capacitive DC-link design has been performed for more than two decades and is still very popular, given the number of papers published on this topic every year. The solutions to eliminate $p_{2\omega}(t)$ from DC and AC side can be divided into two categories: the passive solutions and active solutions as shown in Fig. 1, which depends on whether an additional auxiliary circuit is needed or not. The main achievements in capacitive DC-link research are shown in Fig. 8 chronologically as well as thematically. Key solutions indicate novel topologies or concepts and important solutions represent contributions of control and optimization for different applications, which are based on the key solutions. According to the available literatures and patents, the main achievements in capacitive dc-link research are presented in Table V. The first two categories are passive solutions, which includes passive

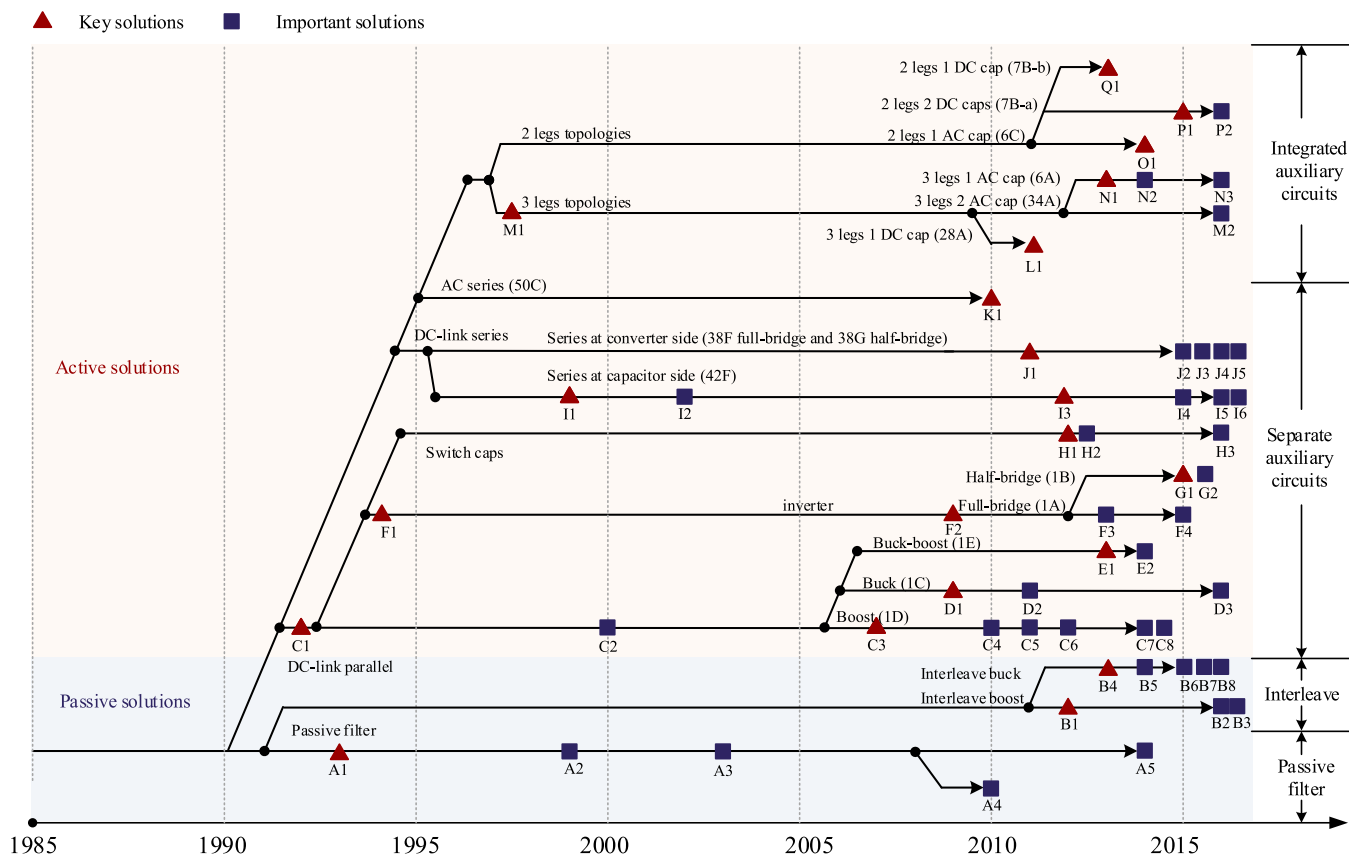

A1. K. Toyama, T. Takeshita et al, LC resonant, 1993.
 A2. D. C. Hamill and P. T. Krein et al, saturable inductor, 1999.
 A3. J. C. Das, passive filter, 2003.
 A4.S. Y. Hui, et al, Passive Offline LED Driver 2010.
 A5. M. Vasiladiotis and A. Rufert, control for resonant filters, 2014.
 B1. G. R. Zhu, S.C. Tan et al, inverter/leave boost, 2012.
 B2. D. B. W. Abeywardana,et al, closed-loop control for boost, 2016.
 B3. D. B. W. Abeywardana,et al, consider component tolerances, 2016.
 B4. I. Serban, invterleave buck, 2013.
 B5. S. Li, S. Y. Hui, et al, general interleave, 2014.
 B6. I. Serban et al, grid connected with power decoupling, 2015
 B7. W. Yao, F. Blaabjerg et al, close-loop control for buck, 2016
 B8 W. Yao, F. Blaabjerg et al, robust control scheme, 2016.
 C1. H. Irie, T. Yamashita et al, 2-quadrant chopper, 1992.
 C2. Garcia, M. D. Martinez-Avial et al, harmonic reducer review, 2000.
 C3. A. C. Kyritsis, E. C. Tatakis, boost buffer, 2007.
 C4. M. Jang and V. G. Agelidis, battery storage, 2010.
 C5. S. Wang, X. Ruan et al, E-cap free in LED, 2011.
 C6. M. Jang, and V. Agelidis, Fuel cell system for grid connected, 2012.
 C7. W. Cai, S. Duan,et al, virtual capacitor for high efficiency, 2014.
 C8. Y. Yang, X. Ruan, et al, Feed forward for all the harmonics, 2014.
 D1. R. Wang, F. Wang et al, buck buffer with high power density, 2009.
 D2. H. Li, K. Zhang, et al, continuous control, 2011.
 D3. Z. Kong, K. Zhang, et al, buck buffer for MMC submodule 2016.
 E1. K. W. Lee, T. J. Liang, et al, buck-boost buffer, 2013..
 E2. X. Cao, Q. C. Zhong, improve stability, 2014.
 F1. Y. Wang, DC shunt active filter, 1994.
 F2. P. T. Krein, R. S. Balog, Three port for power decoupling, 2009.
 F3. Chi Jin, Peng Wang, et al, APF application, 2013.
 F4. Y. Tang, F. Blaabjerg et al, PQ control for power decoupling, 2015.

G1. Y. Tang, F. Blaabjerg et al, half bridge buffer, 2014.
 G2. Y. Tang, F. Blaabjerg et al, closed-loop control, 2014.
 H1. M. Chen, K. K. Afridi et al, Stacked switched capacitor, 2012.
 H2. K. Afridi, and D. J. Perreault, Enhanced bipolar stacked, 2012.
 H3. C. McHugh et al, high power density implementation, 2016.
 I1. T. Tanaka and S. Funabiki, full-bridge series with cap as dc-link, 1999.
 I2. T. Tanaka, S. Fujikawa and S. Funabiki, controller for buffer structure, 2002.
 I3. Kuang Li, Jinjun Liu, et al, application for harmonics 2006.
 I4. S. Qin, buffer sizing and design, 2015.
 I5. V. Michal, buck buffer with dc link cap in series. 2016.
 I6. H. Wang and H. Wang. Two terminal DC-link series module, 2017.
 J1.H. Wang, H. S. H. Chung et al, series rectifier, 2011.
 J2. W. Liu, H.S.H.Chung et at, modelling and control, 2015.
 J3. Y. Qiu, Y. F. Liu et al, in LED system, 2015.
 J4. V. S. P. Cheung, H. Chung et al, scalable multiparallel, 2016.
 J5. X. Lyu, D. Cao et al, in series and in parallel buffer, 2016.
 K1. B. J. Pierquet and D. J. Perreault, series converter at ac side, 2010.
 L1. X. Liu, P. Wang et al, series inverter, 2011.
 M1. T. Shimizu et al, three legs 2 ac caps topolog, 1997.
 M2. G. Zhu, H. Wang et al, AC power decoupling 2016.
 N1. H. Li, K. Zhang et al, three legs 1 ac caps topology, 2013.
 N2. R. Chen, F. Z. Peng, modulation to reduce current stress, 2014.
 N3. H. Wu, S.-C. Wong, inductor optimization, 2016.
 O1. Q. Wenlong, W. Hui, 2 legs with an ac cap, 2014.
 P1. Y. Tang and F. Blaabjerg, 2legs with 2 dc caps, 2015.
 P2. S. Li, S.-C. Tan et al, modeling and controller design, 2016.
 Q1. W. Cai, S. Duan et al, 2 legs boost inverter, 2013.

Fig. 8. Main achievements in capacitive dc-link research.

TABLE V
MAIN ACHIEVEMENTS SUMMARY

| Category | No | Type | Features | Limitation | Reference |
|---|----------------|--|--|--|-----------|
| Passive filters (Easy to be implemented because of no active devices inside) | A1 | Topology | LC resonant filter for low-frequency | Parameter variation and large volume | [6] |
| | A2 | Topology | Adjust the resonant frequency | Large volume | [7] |
| | A3 | Topology | Review kinds of passive filter for DC-link | Parameter variation and large volume | [8] |
| | A4 | Topology | Passive component only | High harmonics introduced | [10] |
| | A5 | Control | Controller design consider the DC-link filter | | [12] |
| Interleave structure (Topology born with power decoupling capability) | B1 | Topology | Inverter is boost and without large E-cap | High voltage stress for all components | [13] |
| | B2 | Control | Controller design for better dynamic performance | | [27] |
| | B3 | Control | Controller design consider tolerance | | [28] |
| | B4 | Topology | Full bridge structure is easy to be implemented | Low modulation index | [15] |
| | B5 | Control | Different structure with current waveform control | | [17] |
| | B6 | Application | Consider grid code and component sizing | | [23] |
| | B7 | Control | Close-loop control consider component tolerance | | [26] |
| | B8 | Control | Robust control for differential topologies | | [64] |
| Separate auxiliary circuit (No more change to the main system) | C1 | Concept | 2-quadrant DC chopper for ripple voltage concept | | [30] |
| | C2 | Concept | Review kinds of DC harmonics reducer | | [31] |
| | C3 | Topology (1D) | Boost converter for DC-link with small capacitance | High voltage stress and much energy storage | [35] |
| | C4 | Control | Control design for fuel cell system | | [36] |
| | C5 | Application | Control design for LED system | | [38] |
| | C6 | Application | Control design for fuel cell consider grid code | | [40] |
| | C7 | Control | Control design for high efficiency and fast response | | [42] |
| | C8 | Control | Feed-forward control for high accuracy ripple mitigation | | [43] |
| | D1 | Topology (1C) | DCM buck buffer circuit | Components holds DC-link voltage | [44] |
| | D2 | Control | CCM control for buck buffer circuit | | [46] |
| | D3 | Application | Buck buffer circuit for MMC application | | [49] |
| | E1 | Topology (1E) | Buck-boost buffer structure | Components holds DC-link voltage | [50] |
| | E2 | Control | Controller optimization for stability | | [51] |
| | F1 | Concept | DC shunt active filter for low-frequency harmonics | | [53] |
| | F2 | Topology (1A) | Three port concept for power decoupling | | [55] |
| | F3 | Application | Full-bridge buffer for active power filter application | | [57] |
| | F4 | Control | PQ control for full-bridge buffer circuit | | [58] |
| | G1 | Topology (1B) | Half-bridge buffer | High voltage stress and much energy storage | [60] |
| | G2 | Control | Close-loop control consider component tolerance | | [61] |
| | H1 | Topology | Switched capacitors as energy buffer | Control complexity and many devices | [66] |
| H2 | Concept | General concept of switched capacitors as buffer | Control complexity and many devices | [68] | |
| I1 | Topology (42F) | Series full-bridge for damping harmonics | E-cap used in buffer circuit | [71] | |
| I2 | Control | Control the full-bridge as a controllable impedance | | [73] | |
| I3 | Application | Series full-bridge with inductor as buffer | Additional DC-link capacitor is needed | [75] | |
| I4 | Control | Control for low-frequency ripple voltage and power loss compensation | | [76] | |
| I5 | Topology (42E) | Series buck converter as buffer | Much energy storage | [79] | |
| I6 | Control | Voltage control for two terminal buffer | | [83] | |
| J1 | Topology (38F) | Series full-bridge with the converter for voltage compensation | Make one side voltage constant | [85] | |
| J2 | Application | Modeling the series module for PV application | | [87] | |
| J3 | Application | Control and implementation of series module for LED application | | [88] | |
| J4 | Topology (38G) | Half bridge series module and its scalable multiparallel | Make one side voltage constant | [89] | |
| J5 | Application | Series and parallel connection in buffer circuit | | [90] | |
| K1 | Topology (50C) | Series buck converter at AC side | Change modulation strategy of main circuit | [91] | |
| (Integrated auxiliary circuits) Reduce number of components in single- phase converter with power decoupling capability | L1 | Topology (38A) | Six-switches converter with power decoupling capability | Low modulation index | [105] |
| | M1 | Topology (34A) | Three legs with 2 AC capacitors topology, which reuse the LC filter as energy buffer | Low modulation index and much energy storage | [93] |
| | M2 | Control | Reduce total energy storage of buffer | | [94] |
| | N1 | Topology (6A) | Three legs with 1 AC capacitor as buffer, which can increase energy buffer ratio | Many switches are used | [95] |
| | N2 | Control | Modulation to reduce current stress | | [97] |
| | N3 | Control | Component sizing optimization | | [99] |
| | O1 | Topology (6C) | Full-bridge with one buffer capacitors | Low modulation index | [111] |
| | P1 | Topology (7B) | Full-bridge with two buffer capacitors | Low modulation index and high current stress | [112] |
| | P2 | Concept | General structure to integrate half-bridge into full-bridge | | [114] |
| | Q1 | Topology (35B) | Boost inverter with only 4 switches | Swinging DC-link voltage | [109] |

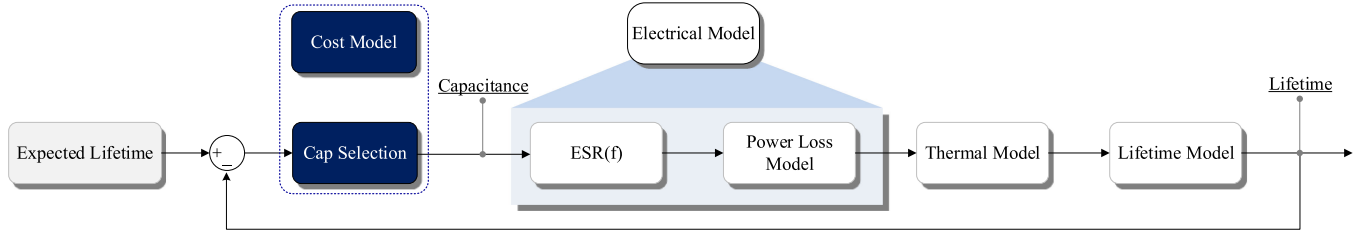


Fig. 9. Capacitor reliability-oriented design to fulfill certain specification.

filter and interleave structure. The other two categories are active solutions, which include separate auxiliary circuit and integrated auxiliary circuit.

IV. COMPONENT SIZING PROCEDURE FOR BENCHMARKING OF CAPACITIVE DC-LINK SOLUTIONS

In order to keep same specification to existing solutions for benchmarking, a reliability-oriented design procedure is incorporated to size the capacitor and power semiconductor considering the same operating performance and lifetime target. For the inductor, total harmonic distortion (THD) is considered to size the inductor.

A. Capacitor

The reliability-oriented procedure to size the capacitors is shown in Fig. 9.

1) *Expected Lifetime Definition*: The selection of either E-caps or film capacitors should fulfill the lifetime requirement of the overall power conversion system. It should be mentioned that it is possible to select proper E-caps to achieve different lifetime targets by derating the operation conditions. Therefore, in principle, lifetime itself is not the determining factor to decide which type of capacitors can be used. By considering the respective advantages of E-caps and film capacitors, the type of capacitors selected in the case studies is as follows: E-caps are used for the dc-link capacitor C_{dc} and film capacitors are used for the auxiliary capacitor C_b . Such selections are based on the overall cost considerations as discussed later in cost assessment.

2) *Capacitor Selection*: Preliminary capacitor selection is done according to the electrical stress (voltage stress and current stress) and minimum required capacitance to limit the voltage ripple ratio derived from the electrical model. If the predicted capacitor lifetime is lower than the design target, another series of capacitors with longer rated lifetime or a capacitor in the same series with larger capacitance (i.e., smaller ESR) is chosen.

3) *Electrical Stress Analysis*: The electrical stress of each component is the basic for component selection. The voltage stress of dc-link E-cap is constant, determined by the system specification. The dc-link voltage in this design is V_{dc} with a voltage ripple ratio of α_v . In some existing topologies, because of dc-link voltage utilization of the system is lower, the dc-link voltage is set to be another specified value. Different from that, the buffer capacitor's voltage stress is related to the capacitance of buffer capacitor. Since the total energy storage in the capacitor determines its cost and power density at certain voltage rating,

in this paper, all the cases are designed for minimum total energy storage in capacitors. Then, the electrical stresses of the capacitors can be derived.

4) *Thermal Stress Calculation*: Thermal stress is one of the critical stressors for capacitors, resulting in the reduction of capacitance and the increase of ESR due to wear out. The current ripple and ambient temperature are the contributors to the internal thermal stress of the capacitor. Toward an electrolytic capacitor, the dominant degradation mechanisms are electro-chemical reaction in the oxide layer and the electrolyte vaporization [3]. Both factors lead to an increase in ESR over the operating life of a capacitor. Especially, the increase of capacitor power loss causes a higher operating temperature inside the capacitor. The hot-spot temperature of the capacitor, which is affected by the current stress and ambient temperature, is derived as

$$T_h = T_a + R_{ha} \times \sum_{i=1}^n [\text{ESR}(f_i) \times I_{\text{rms}}^2(f_i)] \quad (4)$$

where T_h is the hot-spot temperature, T_a is the ambient temperature, R_{ha} is the equivalent thermal resistance from hot-spot to ambient, $\text{ESR}(f_i)$ is the ESR at frequency f_i , and $I_{\text{rms}}(f_i)$ is the rms value of the ripple current at frequency f_i . The hot-spot temperature T_h can then be estimated.

5) *Lifetime Prediction*: Lifetime prediction for the preliminarily selected capacitors can be done by the model that predicts the lifetime of capacitors under different operation conditions. According to the derivations in [3]

$$L = L_0 \times \left(\frac{V}{V_0}\right)^{-n} \times \exp\left[\left(\frac{E_a}{K_B}\right) \left(\frac{1}{T} - \frac{1}{T_0}\right)\right] \quad (5)$$

where L and L_0 are the lifetime under the use condition and testing condition, respectively. V and V_0 are the voltage at use condition and test condition, respectively. T and T_0 are the temperature in Kelvin at use condition and test condition, respectively. E_a is the activation energy, K_B is Boltzmann's constant $8.62 \times 10^{-5} \text{ eV/K}$, and n is the voltage stress exponent. Therefore, the values of E_a and n are the key parameters to be determined in the above model. For E-cap and film capacitors, a simplified model from the above equation is popularly applied as follows:

$$L = L_0 \times \left(\frac{V}{V_0}\right)^{-n} \times 2^{\frac{T_0 - T}{10}}. \quad (6)$$

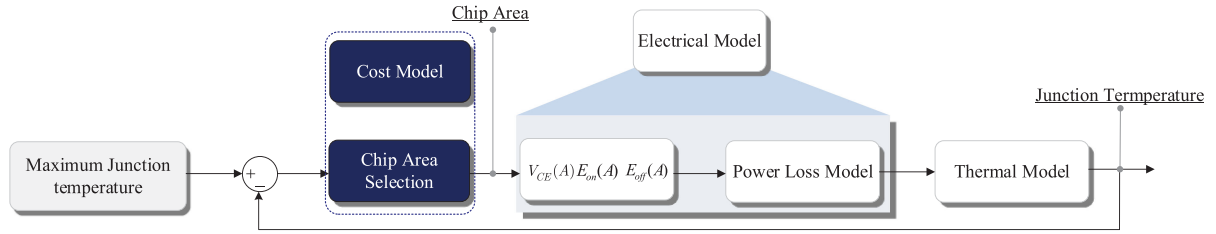


Fig. 10. Power semiconductor reliability-oriented design procedure to fulfill the certain specification.

The model corresponds to a specific case of first equation when $E_a = 0.94eV$ and T_0 and T are substituted by $398K$. For MPPF-Caps, the exponent n is from around 7 to 9.4, which is used by leading capacitor manufacturers. For E-cap, the value of n typically varies from 3 to 5.

B. Power Semiconductors

The reliability-oriented procedure to size the chip area of active switches is shown in Fig. 10. The essence of selecting power semiconductor is sizing the chip area in each topology with the same loading conditions. By analyzing the power loss and thermal stress on each device, the optimal chip area can be selected for the maximum junction temperature, which is assumed to satisfy the lifetime requirement. The power semiconductor used in following analysis is IGBT. Similar sizing procedure can also be applied for MOSFET application.

1) *Power Loss Calculation*: The power losses in power semiconductor devices consist of the conduction loss and switching loss. If it is assumed that the current and voltage in a switching period is constant, the conduction loss in a switching period of each power device is

$$P_{\text{conT}} = v_{\text{CE}}(|i_{\text{sw}}|, T_j)|i_{\text{sw}}| \quad (7)$$

$$P_{\text{conD}} = v_{\text{F}}(|i_{\text{D}}|, T_j)|i_{\text{D}}| \quad (8)$$

where P_{conT} is the conduction loss of the active device, and P_{conD} is the conduction loss of the antiparallel diode. i_{sw} and i_{D} are the current flowing through the device and the diode, and T_j is the junction temperature of the devices. The v_{CE} and v_{F} are related to $i_{\text{sw}}/i_{\text{D}}$ and T_j , which will be further discussed later. On the other hand, the switching loss in each power device can be calculated as

$$P_{\text{swT}} = f_{\text{sw}}[E_{\text{on}}(|i_{\text{sw}}|, T_j, V_{\text{dc}}) + E_{\text{off}}(|i_{\text{sw}}|, T_j, V_{\text{dc}})] \quad (9)$$

$$P_{\text{swD}} = f_{\text{sw}}E_{\text{rr}}(|i_{\text{D}}|, T_j, V_{\text{dc}}). \quad (10)$$

Similar as the equation above, P_{swT} is the switching loss for the switch, and P_{swD} is the switching loss for the freewheeling diode. E_{on} and E_{off} are the turn ON and turn OFF energy dissipated by the device, whereas the E_{rr} is the reverse recovery energy loss dissipated by the diode, which are the functions of $i_{\text{sw}}/i_{\text{D}}$, T_j and V_{dc} .

2) *Thermal Stress Analysis*: The power losses of active switches induces thermal stresses. The junction temperature of

TABLE VI
PARAMETERS RELATED TO CHIP AREA BY CURVE FITTING
(SOURCE: INFINEON [122])

| Voltage Rating(V) | Parameters | a_0 | a_1 | a_2 | a_3 |
|-------------------|------------------|----------|----------|----------|---------|
| 600 | V_{ce} | 2.64 | -1.32E-1 | 7.18E-3 | 3.14E-2 |
| 600 | E_{tot} | 9.89E-08 | 1.71E-10 | 2.06E-10 | |
| 1200 | V_{ce} | 2.61 | -0.0648 | 6E-3 | 4.13E-2 |
| 1200 | E_{tot} | 1.14E-07 | 1.12E-09 | 8.10E-10 | |

IGBTs can be modeled as

$$T_j(t) = P_{\text{tot}}(t)Z_{\text{th}(j-c)}(t) + T_c(t) \quad (11)$$

$$T_c(t) = T_a + [P_{\text{totS}}(t) + P_{\text{totD}}(t)] \times [Z_{\text{th}(c-h)}(t) + Z_{\text{th}(h-a)}(t)] \quad (12)$$

where P_{tot} gives the IGBT or diode power losses. P_{totS} and P_{totD} are the power losses in the IGBT and the diode, respectively. $Z_{\text{th}(j-c)}$, $Z_{\text{th}(c-h)}$, and $Z_{\text{th}(h-a)}$ give the thermal impedance from junction to case, case to heatsink and heatsink to ambient, respectively. T_c is the case temperature.

3) *Sizing of the Chip Area*: The power losses, thereby the thermal stresses and lifetime of the IGBTs are dependent on its chip areas. To achieve a specific lifetime target, a maximum allowable junction temperature is set in the design process, also as shown in Fig. 10. In order to size the chip area, the conduction loss model, the switching loss model, and the thermal model have to be adapted with the semiconductor chip area. The Infineon High Speed 3 (600 and 1200 V) and Infineon IGBT Bare Die (600 and 1200 V) have been chosen as the database because of the availability of sufficient information [122], [123]. For low voltage cases, Infineon HEXFET series (100 and 150 V MOSFET) data are used for cost benchmarking. According to the associated data-sheets, the chip size is approximately proportional to the current rating. Moreover, the chip size determines the switch ON and OFF energy E_{tot} , V_{CE} , and Z_{th} , which have influence on the junction temperature of the devices. Based on the complete loss and thermal model including device rating information [124], the relationships can be approximately obtained by curve fitting of the equation given below

$$\begin{cases} V_{\text{CE}}(A_{\text{chip}}, T_j, i_{\text{sw}}) = a_0 + a_1 A_{\text{chip}} + a_2 T_j + a_3 i_{\text{sw}} \\ E_{\text{tot}}(A_{\text{chip}}, T_j, i_{\text{sw}}, V_{\text{dc}}) = V_{\text{dc}} \times i_{\text{sw}} \\ \quad \times (a_0 + a_1 A_{\text{chip}} + a_2 T_j). \end{cases} \quad (13)$$

The constants a_0 , a_1 , a_2 , and a_3 of the specifically analyzed IGBTs are listed in Table VI. The confidence level is 95% and R^2 (R^2 is computed from the sum of the squares of the distances

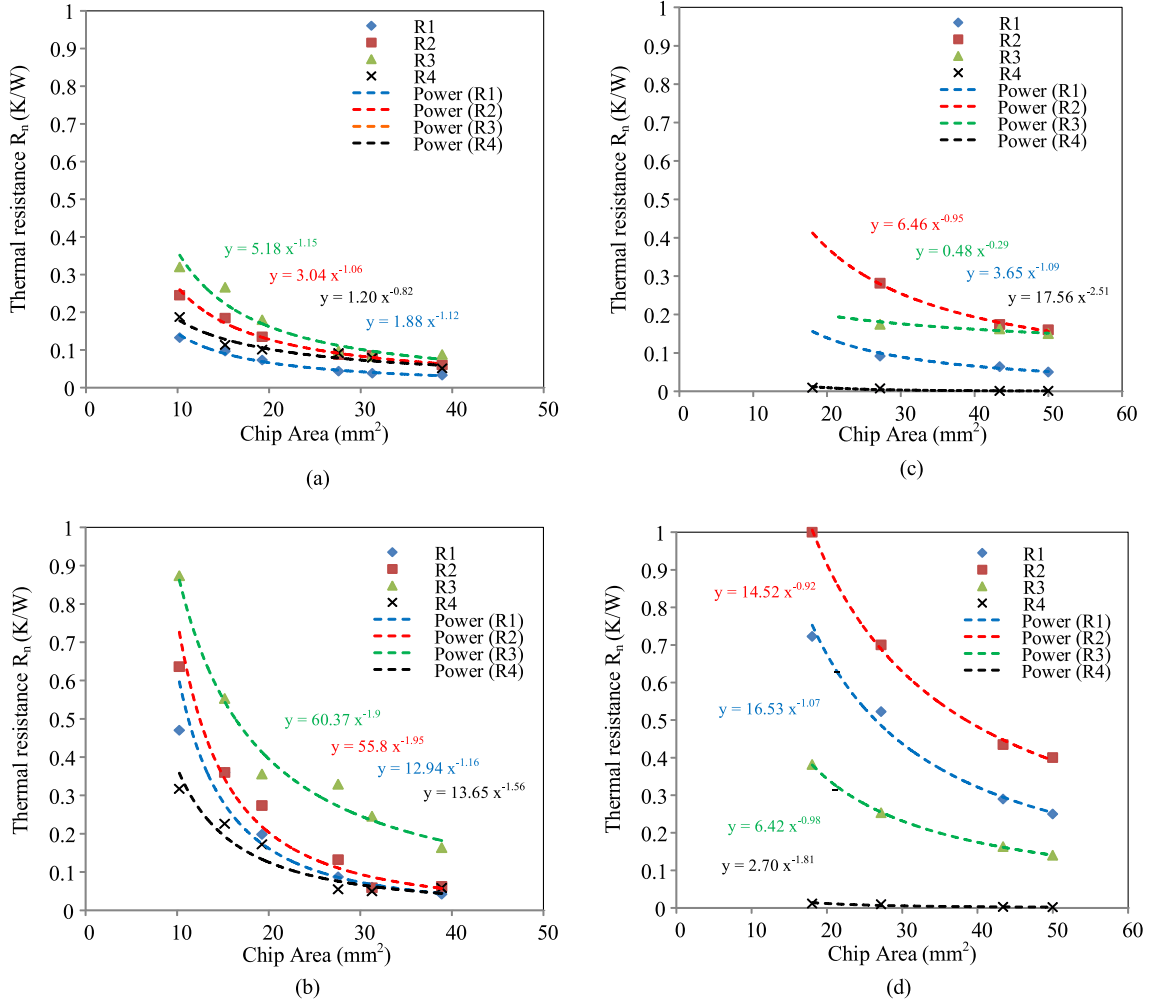


Fig. 11. Curve fitting results of thermal impedance parameters to the selected power devices. (a) Thermal resistance of 600 V transistor. (b) Thermal resistance of 600 V diode. (c) Thermal resistance of 1200 V transistor. (d) Thermal resistance of 1200 V diode.

TABLE VII
DIODE PARAMETERS RELATED TO CHIP AREA BY CURVE FITTING (SOURCE:
INFINEON [122])

| Voltage Rating (V) | Parameters | a_0 | a_1 | a_2 | a_3 |
|--------------------|------------|---------|----------|----------|--------|
| 600 | V_F | 1.7 | -4.2E-2 | 3.1E-04 | 3.3E-2 |
| 600 | E_{tot} | 1.3E-05 | 2.76E-05 | 6.31E-06 | |
| 1200 | V_F | 2.5 | -0.04 | 1.3E-3 | 7.1E-2 |
| 1200 | E_{tot} | 3.6E-04 | 2.9E-04 | 1.1E-05 | |

of the points from the best-fit curve determined by nonlinear regression) are higher than 0.9. Similar analytical models for diodes can be obtained by curve fitting according to the equations below

$$\begin{cases} V_F(A_{chip}, T_j, i_{sw}) = a_0 + a_1 A_{chip} + a_2 T_j + a_3 i_{sw} \\ E_{tot}(A_{chip}, T_j, i_{sw}, V_{dc}) = V_{dc} \times i_{sw} \\ \quad \times (a_0 + a_1 A_{chip} + a_2 T_j). \end{cases} \quad (14)$$

The constants for the above equations are listed in Table VII. The thermal impedance of the power semiconductor can also be

seen as a function of chip area, which is shown below

$$\begin{aligned} Z_{th}(A_{chip}) &= \sum_{n=1}^4 R_n(A_{chip})(1 - e^{-\frac{t}{\tau_n}}) \\ &= \sum_{n=1}^4 a_{n0} A_{chip}^{a_{n1}} (1 - e^{-\frac{t}{\tau_n}}) \end{aligned} \quad (15)$$

where R_n is the thermal resistance for n layer RC lump of IGBT and τ_n is the time constants. The curve fitting results for thermal resistances $R_n(A_{chip})$ is presented in Fig. 11.

C. Inductor

Since it is assumed that the magnetic components usually have less degradation compared to active switches and capacitors, the lifetime analysis of magnetic components is not considered in this paper. As the modulation strategies of the single-phase systems presented above have changed, the sizing of the inductor is based on achieving the same THD of the inductor currents. The inductor design diagram can be seen in Fig. 12. An example

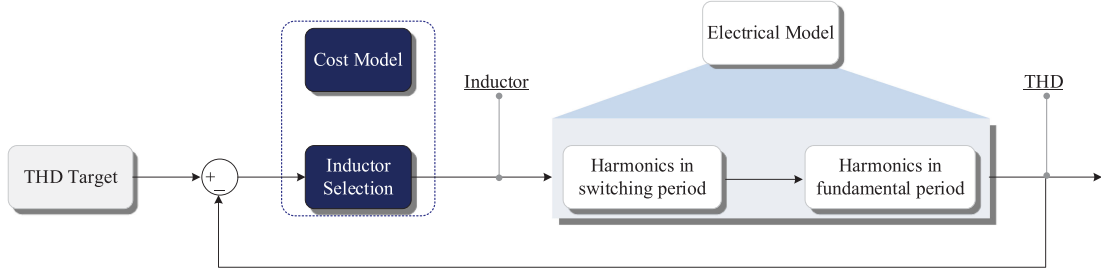


Fig. 12. Inductor design procedure to fulfill the certain specification.

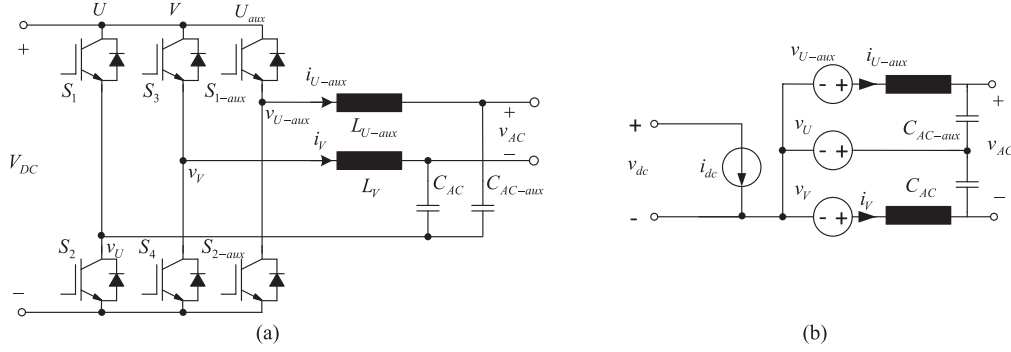


Fig. 13. Three legs single-phase structure used for the inductor design and analysis. (a) Topology used for inductor design. (b) Average model of the topology used for inductor design.

including three legs is presented in Fig. 13 to illustrate the inductance design process, which can be extended to other two- and three-legs single-phase topologies with integrated active dc-link. U_{aux} and V leg are connected to the ac port of the single-phase converter and U leg is used for power decoupling, which seems as the float ground of the capacitors. This structure is able to be transformed into several single-phase topologies from the topology derivation, such as the interleaved buck converter (by connecting the float ground to negative terminal of dc source), topology 6A (with only one buffer capacitor) and topology 34A. The inductor design procedure for these cases is similar.

On the basis of the mathematical analysis, the rms value of total harmonics over one period of the fundamental output voltage T can be obtained, which is limited to $\alpha_i I_{AC,rms}$. $I_{AC,rms}$ is the rms value of the ac port current and α_i is the current ripple ratio presented in Table VIII.

$$\begin{aligned} \tilde{I}_{U-aux,rms} &= \sqrt{\frac{1}{T} \left(\int_{t_c}^{t_c + \frac{T}{2}} \tilde{I}_{U-aux,p}^2(t) dt + \int_{t_c + \frac{T}{2}}^{t_c + T} \tilde{I}_{U-aux,n}^2(t) dt \right)} \end{aligned} \quad (16)$$

where t_c is the crossover time of the ac current, $\tilde{I}_{U-aux,p}^2(t)$ and $\tilde{I}_{U-aux,n}^2(t)$ is the rms current of leg U in a switching period. A detailed analysis for parameter derivation is shown in Appendix A. Following above design procedure, the inductors for other leg can be derived and calculated by numerical computation, which can also be extended to all the cases. The analysis results for all the cases following above method have been listed in Table X.

TABLE VIII
SPECIFICATION OF THE SINGLE-PHASE SYSTEM AS A STUDY CASE

| Parameters | Description | Value |
|-----------------------|-------------------------------|---------------|
| $P(W)$ | Power rating | 2200 |
| $V_{dc}(V)$ | DC-link voltage | 400 (800) |
| $V_m(V)$ | Peak voltage of AC | $220\sqrt{2}$ |
| $I_m(A)$ | Peak Current of AC | $10\sqrt{2}$ |
| α_v | DC-link voltage ripple ratio | 4 % |
| α_i | Inductor current ripple ratio | 10 % |
| $f_a(Hz)$ | Fundamental frequency | 50 |
| $f_{sw}(Hz)$ | Switching frequency | 20 k |
| $T_{jmax}(^{\circ}C)$ | Maximum Junction Temperature | 100 |
| $T_a(^{\circ}C)$ | Ambient temperature | 50 |
| $L(years)$ | Lifetime target of capacitors | 10 |

The inductor implementations are based on the design software from Magnetics-2014 version [125]. The winding factor for each inductor is set to be similar for all the cases, between 35% and 40%, to keep same winding utilization.

V. COST ASSESSMENT AND SCALABILITY ANALYSIS OF ACTIVE DC-LINKS

In this section, a reliability-oriented design method for cost-benchmarking is proposed, which can resize the components with the specified lifetime target. The cost assessment and scalability analysis in terms of lifetime and power rating are studied to compare the typical capacitive dc-link solutions.

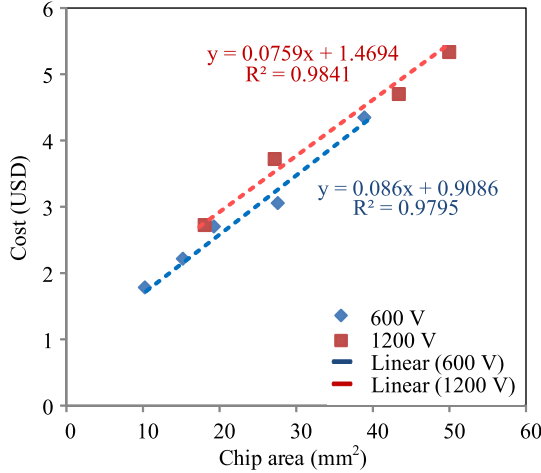


Fig. 14. Statistical results of a power semiconductor cost, which is represented as a unit price for 1000 pieces ordering quantity (source: [122], [123]).

A. Cost Assessment

The cost assessment of the existing capacitive dc-links is based on the same specification as shown in Table VIII. All of them have the same design target, which is the minimum energy storage in capacitors, with the same system specification and lifetime requirement.

1) *Power Semiconductor*: The cost of the IGBT switches is modeled as the chip cost and package cost as discussed in details in [126]. The chip cost is proportional to its area and the packaging cost is a fixed one for a given packaging form. Therefore

$$\sum_{\text{cd}} = \sum_{\text{chip}} + \sum_{\text{pack},x} = \left(\sum_n \sigma_{\text{chip},x(n)} A_{\text{chip},n} \right) + \sum_{\text{pack},x} \quad (17)$$

where $\sigma_{\text{chip},x(n)}$ is the specific cost per chip area, $A_{\text{chip},n}$ depending on the chip technology, and $\sum_{\text{pack},x}$ is the package cost (including chip integration and bonding). The parameter $\sigma_{\text{chip},x(n)}$ can hence be interpreted as the sum of all processing and R&D costs for a given chip technology. The statistical results are presented in Fig. 14.

2) *Capacitor*: The cost of E-caps and film capacitors of certain voltage rating scales with the rated stored energy. Therefore, the cost model can be written as

$$\sum_{\text{cap}} = \sum_{\text{Energy}} + \sum_{\text{pack}} = \sum_{\text{unit}} E_{\text{cap}} + \sum_{\text{pack}} \quad (18)$$

where \sum_{Energy} is the cost for energy stored in the capacitor, which can be described as the multiple of the cost for unit energy \sum_{unit} and the energy requirement for circuit E_{cap} . Fig. 15(a) and (b) shows the statistical results of a unit cost of standard E-cap (450 V rated voltage, snap-in terminals, and 20% tolerance) and polypropylene thin film capacitors from leading manufacturers.

The design results and costs for the capacitors of existing solutions are in given Table IX (Data supported by Digikey [123]). It is worth to note that the lifetime of a dc-link capacitor in 1C with 110 μF is nine years, which is shorter than the lifetime target. By increasing the capacitance (i.e., with lower ESR value)

in the same series of products, the lifetime extends to be 11 years at 150 μF .

3) *Inductor*: On the basis of the inductor cost model presented in [126], high flux ferrite core and solid round winding are selected in the three design cases. Inductors for converters in the considered power range are often material and labor intense, of which a simplified version can also be found in

$$\sum_L = \sum_{\text{mat},L} + \sum_{\text{lab},L} \quad (19)$$

where

$$\begin{aligned} \sum_{\text{max},L} &= \sum_{\text{core},x} + \sum_{\text{wdg},x} + \sum_{\text{mat},x}^{\text{fac}} \\ &= \sigma_{\text{core},x} W_{\text{core}} + \sigma_{\text{wdg},x} W_{\text{wdg}} + \sum_{\text{mat},x}^{\text{fac}} \end{aligned} \quad (20)$$

$$\sum_{\text{lab},L} = \sigma_{\text{lab},x} W_{\text{wdg}} + \sum_{\text{lab},x}^{\text{fac}} \quad (21)$$

$\sigma_{\text{core},x}$, $\sigma_{\text{wdg},x}$, and $\sigma_{\text{lab},x}$ are specific costs per weight W_{core} , W_{wdg} of the core and winding depending on the employed core and winding type. $\sum_{\text{mat},x}^{\text{fac}}$ and $\sum_{\text{lab},x}^{\text{fac}}$ are fixed material and labor costs (e.g., coil former and connectors). The design results of inductors' costs for the existing active power decoupling solutions are in Table X.

4) *Total*: The total cost of the single-phase topologies with active dc-link integrated are calculated, which have been presented in Fig. 16 (detail information are shown in Appendix B). It can be seen that the cost of capacitors plays the greatest impact on the total cost in all the cases. The passive solution cost is lower than the others for ten years lifetime requirement, which is why most industry applications are still using passive way to buffer the pulsating power. 1A, 1B, 1C, 1D, and 1E are separate auxiliary circuits paralleled at the dc-link, which is practical for replacing the E-cap. Because of decoupling the fluctuating power by the ac component of capacitor voltage, the current stress of the buffer capacitor, filter inductor, and power semiconductors in 1B is larger than other solutions, which will result in more cost. 6A costs lower than interleave boost, interleave buck, 6C, 7B, and 34A, due to the high voltage and energy utilization ratio. Moreover, because of low dc-link voltage utilization, interleave buck, 6C, 7B, and 34A work with 800 V dc-link voltage in this design case, which is higher than 400 V dc-link. Among all the single-phase topologies with integrated auxiliary circuits, 42F solution costs the lowest, because the electrical stress of all the components in the auxiliary circuit is low. In this study, the cost for sensor, controller, printed circuit board (PCB), and wire are not included.

B. Scalability Analysis

For different mission profile, the sizing results are different, which further affects the whole life cycle cost of the system. This section presents the cost assessment results with scalable

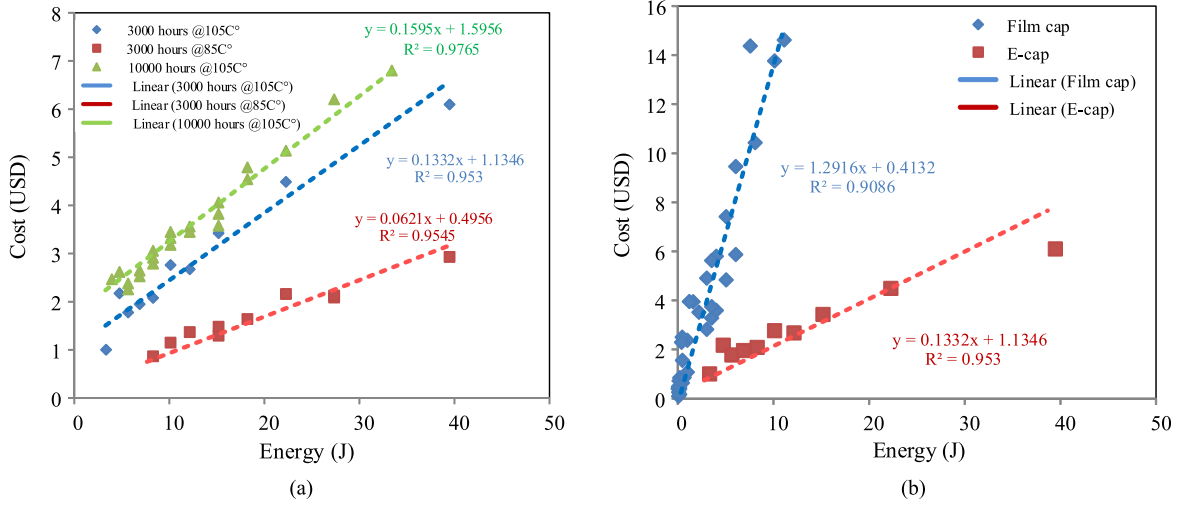


Fig. 15. Statistical results of a unit cost of different kinds of capacitors, which are represented as a unit price for 1000 pieces ordering quantity (source: [123]). (a) Cost models of different types of E-caps. (b) Cost models of 3000 hours @105° E-cap and film capacitors.

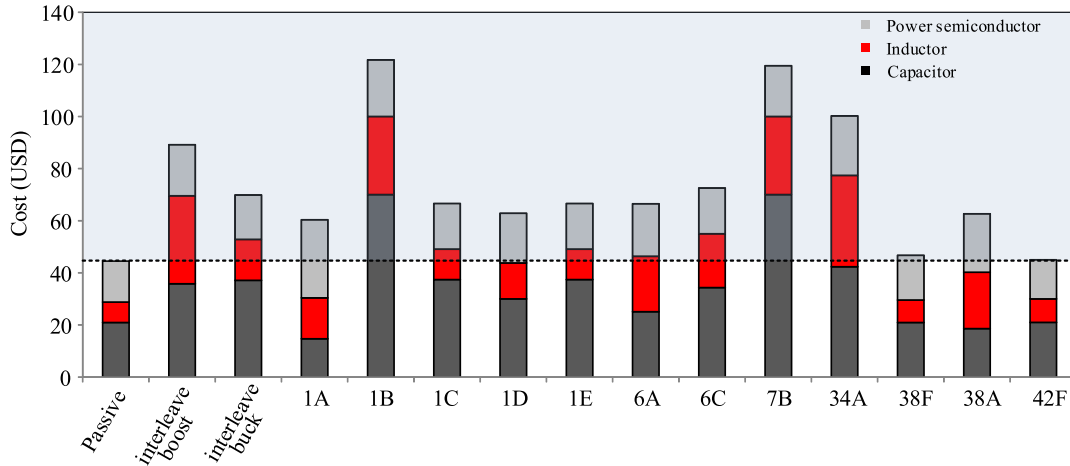


Fig. 16. Total cost of capacitors, inductors, and power devices of the existing methods with ten years lifetime target.

lifetime target and power rating to benchmark these capacitive dc-link solutions.

1) *Lifetime Target*: The cost assessment results for 10 year lifetime target have been shown in Fig. 16. Following the same design process, the cost assessment results with a more strictly lifetime target of 20 and 35 years are shown in Figs. 17 and 18, respectively.

With 20 years lifetime target, the cost of passive solution increase 58% compared with ten years lifetime target. The reason for the cost increase is the capacitor used in this series cannot work for 20 years. It needs to be replaced one time during the whole life cycle, therefore increasing the whole life cycle cost of the system. It can be seen that the topology with active dc-link solution 1A, 1D, 6A, 38F, and 42F cost is lower than the passive solution in this condition. Especially, topology 42F costs the lowest among all the solutions, because of lower apparent power handled by the auxiliary circuit in 42F.

With 35 years lifetime target, the cost of the passive solution increases 133% with 10 years lifetime target. Except for the 1B,

34A, and 7B, all the active capacitive dc-links cost lower than the passive solution. 42F costs 48% of passive solution, which is the most cost-effectiveness one among all the solutions.

To study the relation between the lifetime target and the cost, four cases are investigated for comparisons. Case I is the passive solution, which is implemented by E-caps at the dc-link to buffer the pulsating power. Case II is the active solutions, which is the separate auxiliary energy buffer 1A connected in parallel with the dc-link. Case III is the single-phase topology with integrated auxiliary circuit 6A, which can be derived from full-bridge converter integrated with half-bridge active dc-link. Case IV is the 42F, which is the most cost-effective solution from above benchmarking.

Fig. 19 shows that the cost of passive solution and 42F topology within the lifetime range is increasing almost linearly, while the cost of 1A and 6A solutions are constant because there is no E-cap in the two solutions. Therefore, if the power devices and film capacitors are assumed sufficiently reliable within this lifetime target, no additional cost will be introduced.

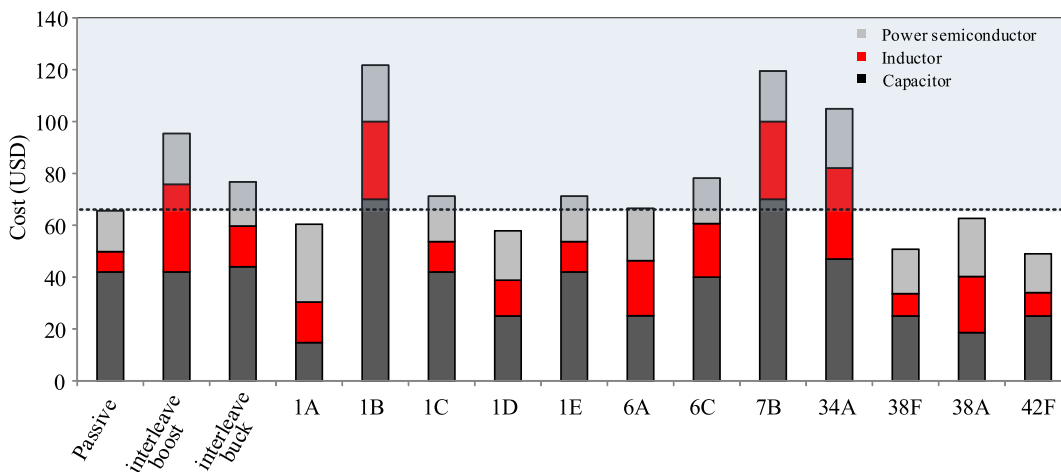


Fig. 17. Total cost of capacitors, inductors, and power devices of the existing methods with 20 years lifetime target.

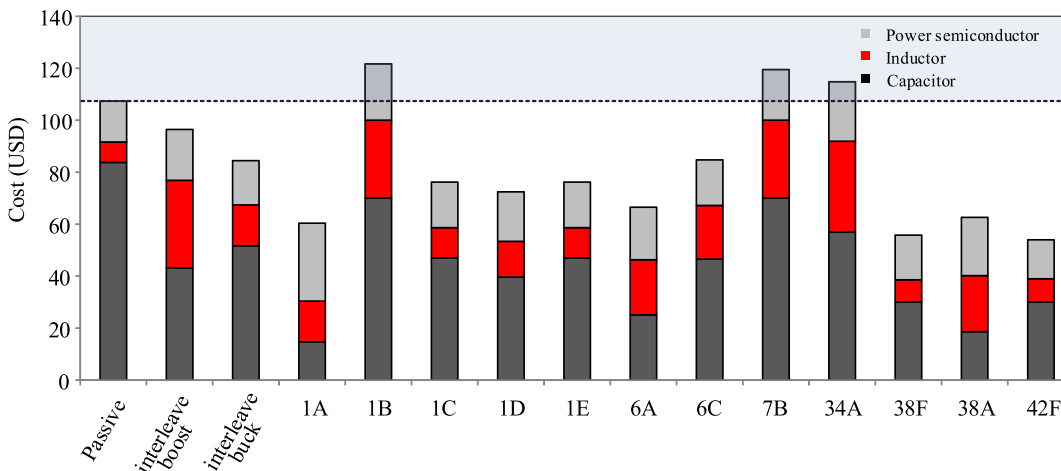


Fig. 18. Total cost of capacitors, inductors, and power devices of the existing methods with 35 years lifetime target.

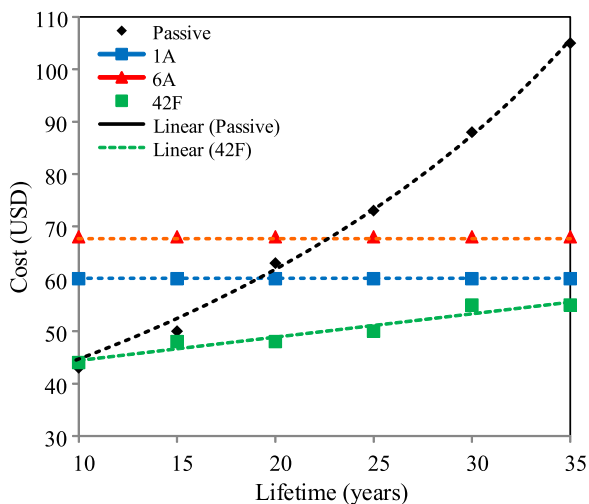


Fig. 19. Relation between the lifetime target and cost of four cases.

2) *Power Rating*: This section studies the relation between the scalable power rating and the cost of the system with active dc-link. Following the component sizing procedure for cost-benchmarking, the cost assessment of the above four cases with range of power rating are shown in Fig. 20. It can be seen that, with ten years lifetime target, the passive solution costs are lower than the other three active capacitive dc-link solutions in all the power ratings. This is the reason why the products whose lifetime requirement is lower than ten years still use a passive solution. It also can be seen that the cost of the four cases increase almost linearly with scalable power rating.

For 20 and 35 years lifetime targets, the cost assessment results of the four cases are different at scalable power rating. From Fig. 21, it can be seen that the life-cycle cost of active solutions is higher than the passive dc-link solutions at the low power rating, whereas the cost is lower at the higher power rating and more stringent reliability requirement applications.

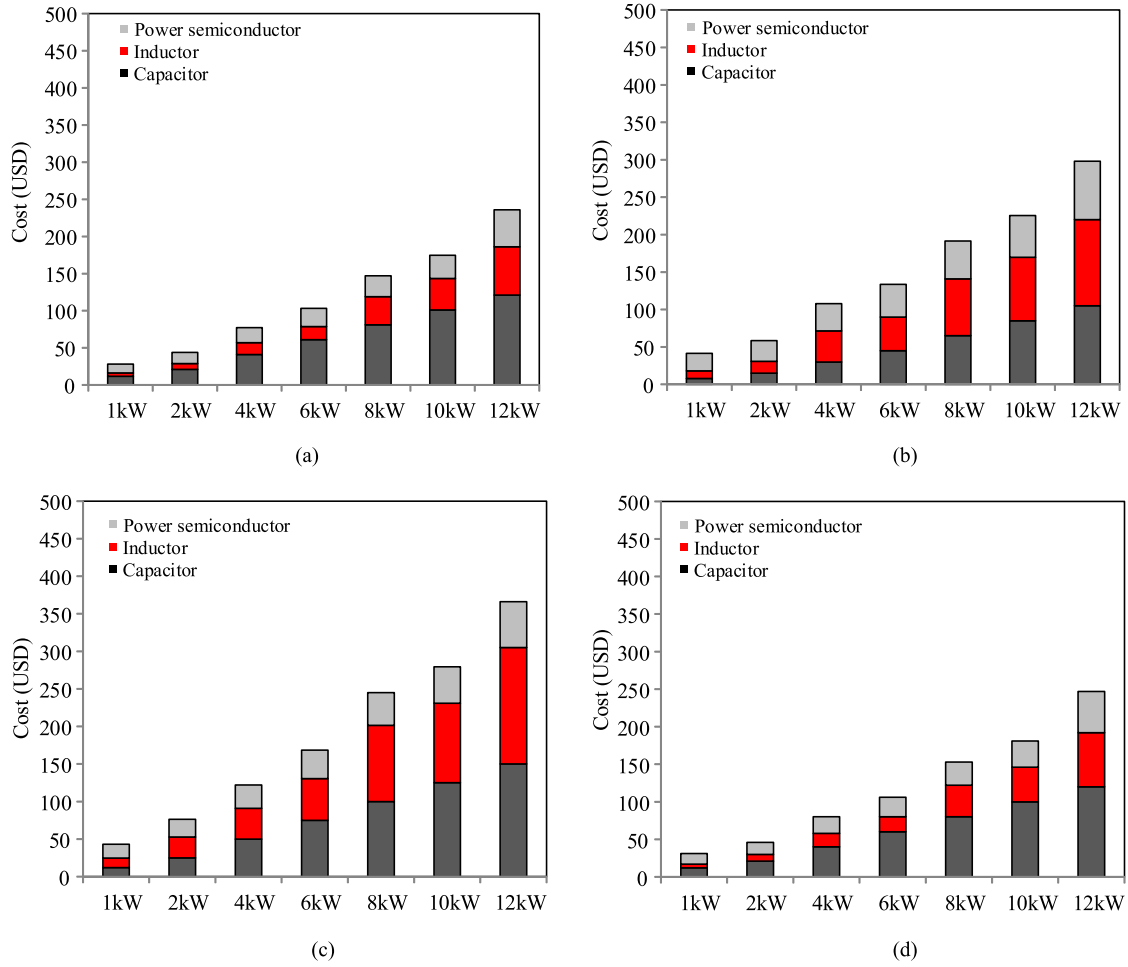


Fig. 20. Cost evaluate results of the four cases with ten years lifetime target and scalable power rating. (a) Cost of passive solution with a scalable power rating. (b) Cost of 1A solution with a scalable power rating. (c) Cost of 6A solution with a scalable power rating. (d) Cost of 42F solution with a scalable power rating.

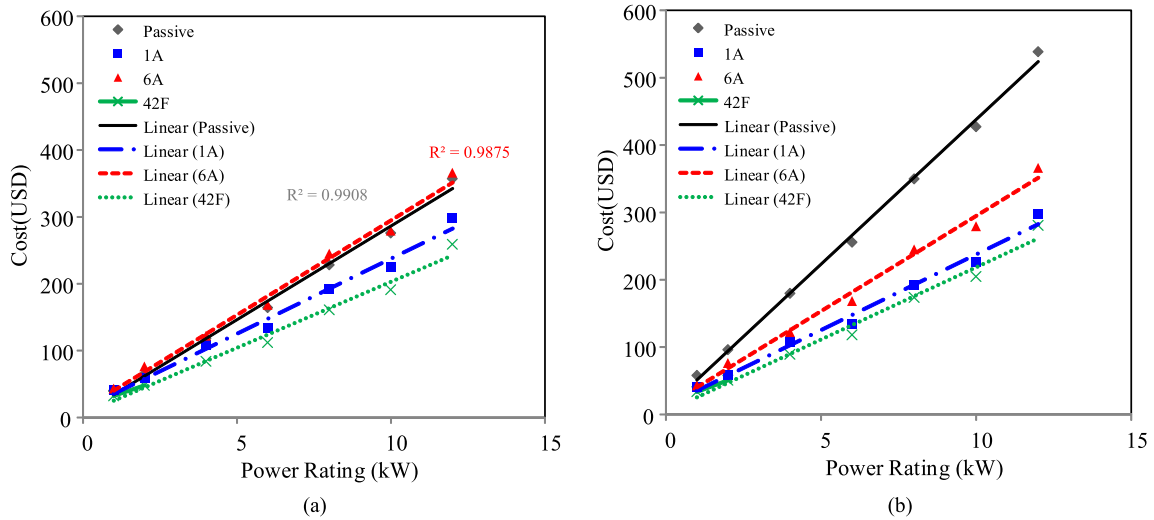


Fig. 21. Cost evaluate results of four cases with 20 and 35 years lifetime target and scalable power rating. (a) With 20 years lifetime target. (b) With 35 years lifetime target.

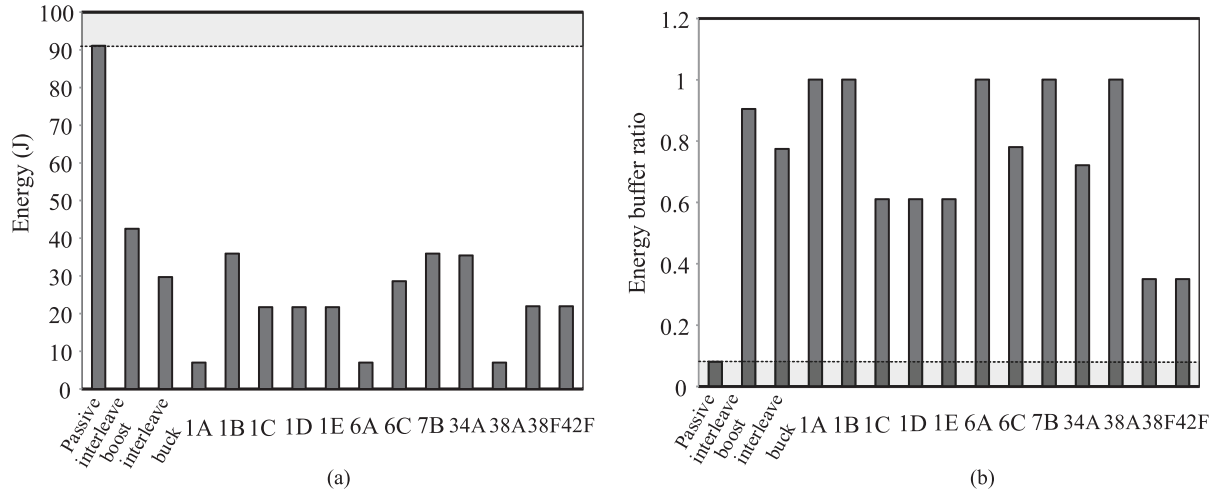


Fig. 22. Total energy stored in capacitors and energy buffer ratio comparisons among typical active dc-link solutions. (a) Total energy stored in capacitors of key solutions. (b) Energy buffer ratio of key solutions.

VI. ENERGY STORAGE ASSESSMENT AND ANALYSIS

Energy storage of active dc-link is a key factor to determine the cost of the capacitor, and indirectly reflects the electrical stress of the dc-link. In this section, the energy storage and energy buffer ratio are considered as the criteria to benchmark the active dc-link solutions.

A. Capacitor Energy Storage

As design target and one of the assessment factors, total energy storage is the sum of the energy storage in all the capacitors, which determines the cost of capacitors in a system as presented below

$$E_{c-tot} = \frac{1}{2}C_{dc}V_{dc-max}^2 + \frac{1}{2}C_bV_{c-max}^2 \quad (22)$$

where E_{c-tot} is the total energy storage in capacitors, C_{dc} and C_b is the capacitance of the dc-link capacitor and buffer capacitor, and V_{dc-max} and V_{c-max} are the maximum dc-link voltage and buffer capacitor voltage, respectively.

B. Energy Buffer Ratio

It is defined to be the ratio of the fluctuating energy to the maximum energy in the capacitor. The total fluctuating energy in both dc-link capacitor and buffer capacitors is

$$E_{f-tot} = \left(\frac{1}{2}C_{dc}V_{dc-max}^2 - \frac{1}{2}C_{dc}V_{dc-min}^2 \right) + \left(\frac{1}{2}C_bV_{c-max}^2 - \frac{1}{2}C_bV_{c-min}^2 \right) \quad (23)$$

where V_{dc-min} and V_{c-min} are the minimum voltage of the dc-link and buffer capacitor, respectively. Thus, the energy buffer ratio is the division of the total fluctuating energy and total energy

storage in capacitors

$$\Gamma = \frac{E_{f-tot}}{E_{c-tot}}. \quad (24)$$

C. Case Study

Case analyses for these single-phase topologies with active dc-links are presented in Fig. 22, in terms of total energy storage in capacitor and energy buffer ratio.

From Fig. 22(a), it can be seen that the passive solution stores the maximum energy in capacitor with the lowest energy buffer ratio among all the assessment solutions. It indicates that a lot of energy is not beneficial in power decoupling. 1 A, 6 A, and 38 A solutions store minimum energy in capacitors and all of it is utilized for energy buffer. The similarity of these solutions is that both of them are synthesized from the full-bridge inverter as the main circuit and full-bridge bidirectional converter as the auxiliary circuit, where there is only ac component in the buffer energy storage component. In Fig. 22(b), the energy buffer ratios of 1B and 7B solutions is 1, whereas they store much energy in capacitor, which means the auxiliary circuit can eliminate the dc-link E-cap and support longer hold up time compared with other cases. The buffer capacitor implementation of these two solutions is to have both capacitors in series, and then in parallel at the dc-link, whose voltage contains dc and fundamental frequency ac components to support the dc-link voltage and decouple the pulsating power.

VII. DISCUSSIONS

The component sizing procedure presented in Section IV allows a cost comparison of different capacitive dc-link solutions to fulfill same system-level specifications, which can be applied for different case studies. Nevertheless, the numerical results shown in Sections V and VI are corresponding to the specifications given in Table VIII only. The dc-link sizing criteria in

the case study are based on the dc-link voltage ripple ratio of 4% in the steady-state operation under rated loading condition. If the dc-link voltage ripple limit is changed, the comparative results could be different as well. Moreover, it is noted that the majority of studies on active capacitive dc-links are based on the steady-state dc-link voltage ripple specification, which are relevant to applications where the required dc-link is determined by its ripple voltage criteria. Nevertheless, in many other applications, the sizing of capacitive dc-links is determined by its ripple current capability or energy storage requirement [86]. There is still lack of study in the literature to evaluate the feasibility of active capacitive solutions from the perspectives of ripple current capability and energy storage requirements. Therefore, the comparative results in Sections V and VI should be treated with caution. Future research efforts are needed to applications which ripple current or energy storage requirement is the decisive factor for capacitor sizing.

VIII. CONCLUSION

An overview of capacitive dc-link solutions in a single-phase power electronic system is presented in this paper.

- 1) A generic topology derivation for single-phase power converters with an integrated auxiliary circuit is proposed in this paper.
- 2) The main achievements in research on capacitive dc-link solutions are reviewed and presented chronologically and thematically, in order to understand the development trend of capacitive dc-link solutions.
- 3) For the cost assessment of capacitive dc-link solutions, a component sizing procedure based on a consistent converter level specification is proposed by considering the reliability as a performance factor that influences on the sizing of power semiconductors and capacitors and sizing the inductors according to the THD limitations. The topology derivation method and the scalability study through the case study in terms of power level and lifetime specifications provide new perspectives than existing overview literature on the presented topic.

The review also identifies a key limitation in the existing studies that the ripple current and energy storage requirements are rarely considered when active capacitor solutions are demonstrated, although they are relevant for many practical applications. Future research to address the limitation is suggested. Moreover, the component sizing criteria presented in this paper can be extended to other capacitor sizing criteria, and also to three-phase applications with unbalanced loads or grids. An additional research effort is suggested to experimentally reliability validation of different proposed active capacitive dc-links.

APPENDIX A INDUCTOR DESIGN

On the basis of the circuit of Fig. 13, the voltage equation of the loop between U_{aux} leg and U leg can be written as

$$v_s = L_{U-aux} \frac{di_{U-aux}}{dt} + v_{c_{AC-aux}} \quad (A.1)$$

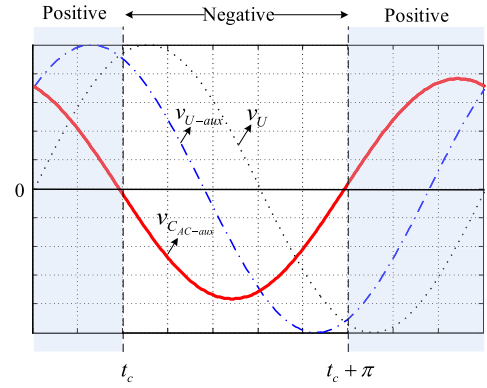


Fig. 23. Modulation waveforms for each two legs in one fundamental frequency.

where v_s is the voltage between middle voltage of U_{aux} and U legs

$$v_s = v_{U-aux} - v_U. \quad (A.2)$$

The capacitor voltage $v_{c_{AC-aux}}$ and inductor current i_{U-aux} can be separated into the average (average over one switching cycle) and the harmonic (ripple) components, that is

$$v_{c_{AC-aux}} = \bar{v}_{c_{AC-aux}} + \tilde{v}_{c_{AC-aux}} \quad (A.3)$$

$$i_{U-aux} = \bar{i}_{U-aux} + \tilde{i}_{U-aux}. \quad (A.4)$$

Upon substituting (A.3) and (A.4) into (A.2), the following equation is obtained:

$$v_s = L_{U-aux} \frac{d(\bar{i}_{U-aux} + \tilde{i}_{U-aux})}{dt} + \bar{v}_{c_{AC-aux}} + \tilde{v}_{c_{AC-aux}}. \quad (A.5)$$

In a well-designed filter, the values of $\tilde{v}_{c_{AC-aux}}$ are small compared to $L_{U-aux} \frac{d\bar{i}_{U-aux}}{dt}$ and, therefore, the ripple component of the filter inductor current can be calculated as

$$\tilde{i}_{U-aux} = \frac{1}{L_{U-aux}} \int (v_s - \bar{v}_s) dt \quad (A.6)$$

where

$$\bar{v}_s = \bar{v}_{c_{AC-aux}} + L_{U-aux} \frac{d\bar{i}_{U-aux}}{dt} \quad (A.7)$$

is the average value of the output voltage of the inverter. Although there are various PWM techniques that can be used to control the inverter, the sampling-based PWM techniques are the most commonly used because the implementation is simpler. The most popular implementation of the sampling-based PWM techniques is based on the comparison between a sinusoidal reference and a high-frequency triangular carrier signal, which is also referred to natural sampling.

The modulation waveforms are plotted in Fig. 23, where the blue and the gray curves are for v_{U-aux} and v_U separately and the red curve is for $v_{c_{AC-aux}}$, which is the difference of v_{U-aux} and v_U . There are two types of switching sequences in one fundamental frequency as shown in Fig. 23.

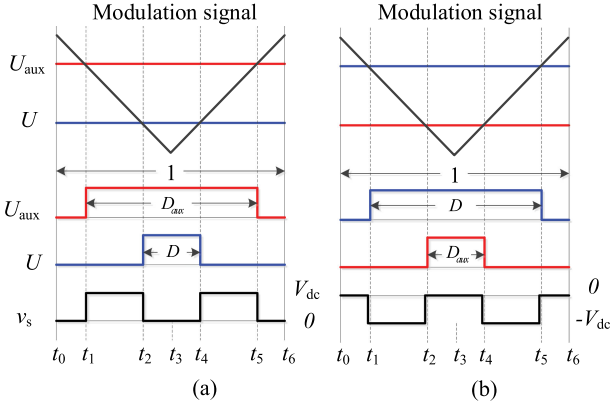


Fig. 24. Switching sequences of each two legs in one switching period. (a) v_s is positive. (b) v_s is negative.

Below the crossover time t_c , v_{U-aux} is larger than v_U , which means the v_s is positive, vice versa. Since a switching sequence determines the switching patterns in a switching period, the rms value of the harmonic current in one fundamental period should be calculated individually for the two switching sequences. The positive and negative switching sequences are shown in Fig. 24(a) and (b), respectively. D and D_{aux} are the duty cycles of S_1 and S_{1-aux} . The mean square values of this current harmonic over one switching period of positive and negative periods can be calculated as

$$\tilde{I}_{U-aux,p}^2 = \frac{1}{T_s} \int_{t_0}^{t_0+T_s} \tilde{i}_{U-aux,p}^2 dt \quad (\text{A.8})$$

$$\tilde{I}_{U-aux,n}^2 = \frac{1}{T_s} \int_{t_0}^{t_0+T_s} \tilde{i}_{U-aux,n}^2 dt \quad (\text{A.9})$$

where T_s is the switching period.

At the steady state, the capacitor voltage can be written as follows:

$$v_{AC-aux} = \frac{1}{2} V_m \sin(\omega t) + B \sin(\omega t + \varphi) \quad (\text{A.10})$$

where B and φ are the amplitude and phase angle of power decoupling function [94]. V_m is the amplitude of ac voltage and V_{dc} is the average dc-link voltage. Therefore, the duty cycles for U_{aux} and U legs can be obtained as

$$\begin{cases} D_{U-aux} = \frac{1}{2} + \frac{\frac{1}{2} V_m \sin \omega t}{V_{dc}} \\ D_U = \frac{1}{2} - \frac{B \sin(\omega t + \varphi)}{V_{dc}} \end{cases} \quad (\text{A.11})$$

In the positive half period of v_s , the harmonic can be integrated from $i_{U-aux,p}$, whereas in the negative half period, it can be integrated from $i_{U-aux,n}$. The crossover time t_c in Fig. 23 can be found by setting v_{AC-aux} equal to 0. The crossover time t_c can be found as

$$t_c = \frac{k\pi - \arctan \frac{B \sin \varphi}{V_m + B \cos \varphi}}{\omega} \quad (k = 0, 1, 2, \dots) \quad (\text{A.12})$$

APPENDIX B COST ASSESSMENT RESULTS

TABLE IX
COST ANALYSIS RESULTS OF CAPACITORS IN SINGLE-PHASE TOPOLOGIES WITH INTEGRATED ACTIVE DC-LINK

| | | Voltage level (V) | | Capacitance (uF) | | Configuration | | Tot cost (USD) | |
|------------------|--------------|------------------------|---------------------|----------------------------|-------------------------|-----------------------------------|--|-----------------|----|
| | | Implementation voltage | Theoretical voltage | Implementation capacitance | Theoretical capacitance | Components | | Lifetime (year) | |
| Passive | Electrolytic | 450 | 408 | 1800 | 1094 | TDK, B43508A5687M0, 3000hr, 105°C | | 11 | 21 |
| Interleave boost | Electrolytic | 450 | 408 | 82 | 51 | TDK, B43508A5826M0, 3000hr, 105°C | | 13 | 36 |
| | Film | 450*2 | 794 | 61*2 | 61*2 | | | | |
| Interleave buck | Electrolytic | 450 | 808 | 82 | 21 | TDK, B43508A5826M0, 3000hr, 105°C | | 13 | 37 |
| | Film | 450*2 | 671 | 121*2 | 121*2 | | | | |
| 1A | Film | 450 | 167 | 110 | 110 | | | | 15 |
| 1B | Film | 450 | 358 | 280*2 | 280*2 | | | | 74 |
| 1C | Electrolytic | 450 | 408 | 150 | 110 | TDK, B43508A5157M0, 3000hr, 105°C | | 11 | 37 |
| | Film | 450 | 311 | 260 | 260 | | | | |
| 1D | Electrolytic | 450 | 408 | 150 | 110 | TDK, B43508A5157M0, 3000hr, 105°C | | 10 | 30 |
| | Film | 450*2 | 709 | 100 | 50 | | | | |
| 1E | Electrolytic | 450 | 408 | 150 | 110 | TDK, B43508A5157M0, 3000hr, 105°C | | 10 | 37 |
| | Film | 450 | 311 | 260 | 260 | | | | |
| 6A | Film | 450 | 264 | 190 | 190 | | | | 25 |
| 6C | Electrolytic | 450*2 | 808 | 47 | 20 | TDK, B43508A5826M0, 3000hr, 105°C | | 10 | 34 |
| | Film | 450 | 438 | 230 | 230 | | | | |
| 7B | Film | 450 | 358 | 280*2 | 280*2 | | | | 74 |
| 34A | Electrolytic | 450*2 | 808 | 82 | 31 | TDK, B43508A5826M0, 3000hr, 105°C | | 13 | 42 |
| | Film | 450 | 425 | 141 | 141 | | | | |
| 38A | Film | 450 | 167 | 140 | 140 | | | | 19 |
| 38F | Electrolytic | 100 | 80 | 270 | 270 | TDK, B41858C9277M, 3000hr, 105°C | | 12 | 21 |
| | Film | 450 | 400 | 110 | 110 | | | | |
| 42F | Electrolytic | 100 | 80 | 270 | 270 | TDK, B41858C9277M, 3000hr, 105°C | | 12 | 21 |
| | Film | 450 | 400 | 110 | 110 | | | | |

TABLE X
COST ANALYSIS RESULTS OF INDUCTORS IN SINGLE-PHASE TOPOLOGIES WITH INTEGRATED ACTIVE DC-LINK [125]

| | | Theoretical Inductance (mH) | Part number | Winding factor(%) | Turns | Wire size (AWG) | Core weight (g) | Winding weight (g) | Cost (USD) | Tot cost (USD) |
|------------------|-----------|-----------------------------|---------------------|-------------------|-------|-----------------|-----------------|--------------------|------------|----------------|
| Passive | U | 1.16 | MAGNETICS C058617A2 | 35 | 150 | 15 | 410 | 215 | 8 | 8 |
| Interleave boost | U | 1.25 | MAGNETICS C058099A2 | 36.2 | 280 | 13 | 440 | 633 | 17 | 34 |
| | U_{aux} | 1.25 | MAGNETICS C058099A2 | 36.2 | 280 | 13 | 440 | 633 | 17 | |
| Interleave buck | U | 1.67 | MAGNETICS C058617A2 | 35 | 150 | 15 | 410 | 215 | 8 | 16 |
| | U_{aux} | 1.67 | MAGNETICS C058617A2 | 35 | 150 | 15 | 410 | 215 | 8 | |
| 1A | U | 1.16 | MAGNETICS C058617A2 | 35 | 150 | 15 | 410 | 215 | 8 | 16 |
| | U_{aux} | 1.04 | MAGNETICS C058867A2 | 35 | 150 | 15 | 410 | 215 | 8 | |
| 1B | U | 1.16 | MAGNETICS C058617A2 | 35 | 150 | 15 | 410 | 215 | 8 | 33 |
| | U_{aux} | 1.15 | MAGNETICS C058339A2 | 15.1 | 200 | 12 | 1200 | 766 | 25 | |
| 1C | U | 1.16 | MAGNETICS C058617A2 | 35 | 150 | 15 | 410 | 215 | 8 | 12 |
| | U_{aux} | 0.62 | MAGNETICS C058089A2 | 38.6 | 200 | 17 | 120 | 119 | 4 | |
| 1D | U | 1.16 | MAGNETICS C058617A2 | 35 | 150 | 15 | 410 | 215 | 8 | 14 |
| | U_{aux} | 0.99 | MAGNETICS C058110A2 | 38.8 | 250 | 16 | 160 | 207 | 6 | |
| 1E | U | 1.16 | MAGNETICS C058617A2 | 35 | 150 | 15 | 410 | 215 | 8 | 12 |
| | U_{aux} | 0.62 | MAGNETICS C058089A2 | 38.6 | 200 | 17 | 120 | 119 | 4 | |
| 6A | U | 1.16 | MAGNETICS C058617A2 | 35 | 150 | 15 | 410 | 215 | 8 | 21 |
| | U_{aux} | 1.22 | MAGNETICS C058907A2 | 38.1 | 300 | 14 | 340 | 499 | 13 | |
| 6C | U | 2.06 | MAGNETICS C058099A2 | 35.8 | 480 | 15 | 440 | 682 | 18 | 21 |
| | U_{aux} | 1.40 | MAGNETICS C058254A2 | 38.8 | 220 | 19 | 87 | 77 | 3 | |
| 7B | U | 2.27 | MAGNETICS C058099A2 | 35.8 | 480 | 15 | 440 | 682 | 18 | 36 |
| | U_{aux} | 2.29 | MAGNETICS C058099A2 | 35.8 | 480 | 15 | 440 | 682 | 18 | |
| 34A | U | 2.41 | MAGNETICS C058737A2 | 37.3 | 250 | 14 | 700 | 579 | 18 | 35 |
| | U_{aux} | 2.41 | MAGNETICS C058737A2 | 37.3 | 250 | 14 | 700 | 579 | 18 | |
| 38A | U | 2.14 | MAGNETICS C058099A2 | 35.8 | 480 | 15 | 440 | 682 | 18 | 22 |
| | U_{aux} | 1.40 | MAGNETICS C058438A2 | 38.6 | 140 | 17 | 170 | 96 | 4 | |
| 38F | U | 1.16 | MAGNETICS C058617A2 | 35 | 150 | 15 | 410 | 215 | 8 | 9 |
| | U_{aux} | 0.12 | MAGNETICS C058204A2 | 37.2 | 70 | 20 | 9.1 | 10 | 1 | |
| 42F | U | 1.16 | MAGNETICS C058617A2 | 35 | 150 | 15 | 410 | 215 | 8 | 9 |
| | U_{aux} | 0.12 | MAGNETICS C058204A2 | 37.2 | 70 | 20 | 9.1 | 10 | 1 | |

REFERENCES

- [1] P. Pelletier, J. M. Guichon, J. L. Schanen, and D. Frey, "Optimization of a dc capacitor tank," *IEEE Trans. Ind. Appl.*, vol. 45, no. 2, pp. 880–886, Mar. 2009.
- [2] H. S.-H. Chung, H. Wang, F. Blaabjerg, and M. Pecht, *Reliability of Power Electronic Converter Systems*. Stevenage, U.K.: IET, 2015.
- [3] H. Wang and F. Blaabjerg, "Reliability of capacitors for dc-link applications in power electronic converters-An overview," *IEEE Trans. Ind. Appl.*, vol. 50, no. 5, pp. 3569–3578, Sep. 2014.
- [4] H. Wang, P. Davari, H. Wang, D. Kumar, F. Zare, and F. Blaabjerg, "Lifetime estimation of dc-link capacitors in adjustable speed drives under grid voltage unbalances," *IEEE Trans. Power Electron.*, vol. 34, no. 5, pp. 4064–4078, May 2019.
- [5] H. Wang and H. Wang, "Capacitive dc links in power electronic systems-reliability and circuit design," *Chin. J. Electr. Eng.*, vol. 4, no. 3, pp. 29–36, Sep. 2018.
- [6] K. Toyama, T. Takeshita, and N. Matsui, "Six switches solution for single-phase ac/dc/ac converter with capability of second-order power mitigation in dc-link capacitor," in *Proc. IEEE IAS Conf.*, Sep. 1993, vol. 2, pp. 273–281.
- [7] D. C. Hamill and P. T. Krein, "A zero ripple technique applicable to any dc converter," in *Proc. IEEE Annu. Power Electron. Spec. Conf.*, May 1999, vol. 2, pp. 1165–1171.
- [8] J. C. Das, "Passive filters potentialities and limitations," in *Proc. Pulp Paper Ind. Tech. Conf.*, Jun. 2003, pp. 187–197.
- [9] J. C. Das, "Passive filters-Potentialities and limitations," *IEEE Trans. Ind. Appl.*, vol. 40, no. 1, pp. 232–241, Jan. 2004.
- [10] S. Hui, S. Li, X. Tao, W. Chen, and W. Ng, "A novel passive off-line led driver with long lifetime," in *Proc. IEEE Annu. Appl. Power Electron. Conf. Expo.*, Feb. 2010, pp. 594–600.
- [11] S. Y. Hui, S. N. Li, X. H. Tao, W. Chen, and W. M. Ng, "A novel passive offline led driver with long lifetime," *IEEE Trans. Power Electron.*, vol. 25, no. 10, pp. 2665–2672, Oct. 2010.
- [12] M. Vasiladiotis and A. Rufer, "Dynamic analysis and state feedback voltage control of single-phase active rectifiers with dc-link resonant filters," *IEEE Trans. Power Electron.*, vol. 29, no. 10, pp. 5620–5633, Oct. 2014.
- [13] G. Zhu, S. Tan, K. Wang, and C. Tse, "Waveform control of fuel-cell inverter systems," in *Proc. IEEE Energy Convers. Congr. Expo.*, Sep. 2012, pp. 4457–4463.
- [14] G. Zhu, S. Tan, Y. Chen, and C. Tse, "Mitigation of low-frequency current ripple in fuel-cell inverter systems through waveform control," *IEEE Trans. Power Electron.*, vol. 28, no. 2, pp. 779–792, Feb. 2013.
- [15] I. Serban, "A novel transistor-less power decoupling solution for single-phase inverters," in *Proc. IEEE Annu. Conf. IEEE Ind. Electron. Soc.*, Nov. 2013, pp. 1496–1500.
- [16] I. Serban, "Power decoupling method for single-phase H-bridge inverters with no additional power electronics," *IEEE Trans. Ind. Electron.*, vol. 62, no. 8, pp. 4805–4813, Aug. 2015.
- [17] S. Li, G. Zhu, S. C. Tan, and S. Y. Hui, "Direct ac/dc rectifier with mitigated low-frequency ripple through waveform control," in *Proc. IEEE Energy Convers. Congr. Expo.*, Sep. 2014, pp. 2691–2697.
- [18] S. Li, G. R. Zhu, S. C. Tan, and S. Y. Hui, "Direct ac/dc rectifier with mitigated low-frequency ripple through inductor-current waveform control," *IEEE Trans. Power Electron.*, vol. 30, no. 8, pp. 4336–4348, Aug. 2015.
- [19] Y. Xia, J. Roy, and R. Ayyanar, "A high performance t-type single phase double grounded transformer-less photovoltaic inverter with active power decoupling," in *Proc. IEEE Energy Convers. Congr. Expo.*, Sep. 2016, pp. 1–7.
- [20] Y. Xia and R. Ayyanar, "Adaptive dc link voltage control scheme for single phase inverters with dynamic power decoupling," in *Proc. IEEE Energy Convers. Congr. Expo.*, Sep. 2016, pp. 1–7.
- [21] D. Gottardo, L. D. Lillo, L. Empringham, and A. Costabeber, "A low capacitance single-phase ac-dc converter with inherent power ripple decoupling," in *Proc. IEEE Annu. Conf. IEEE Ind. Electron. Soc.*, Oct. 2016, pp. 3129–3134.
- [22] V. V. S. P. Kumar and B. G. Fernandes, "Transformerless active power decoupling topologies for grid connected PV applications," in *Proc. IEEE Annu. Conf. IEEE Ind. Electron. Soc.*, Oct. 2016, pp. 2410–2419.
- [23] I. Serban, C. Marinescu, and D. Munteanu, "Performance analysis of a SiC-based single-phase H-bridge inverter with active power decoupling," in *Proc. IEEE Eur. Conf. Power Electron. Appl.*, Sep. 2016, pp. 1–10.
- [24] Y. Xia, J. Roy, and R. Ayyanar, "A capacitance-minimized, doubly grounded transformer less photovoltaic inverter with inherent active-power decoupling," *IEEE Trans. Power Electron.*, vol. 32, no. 7, pp. 5188–5201, Jul. 2017.
- [25] Y. Tang, W. Yao, and F. Blaabjerg, "A dual mode operated boost inverter and its control strategy for ripple current reduction in single-phase uninterruptible power supplies," in *Proc. IEEE ECCE Asia*, Jun. 2015, pp. 2227–2234.
- [26] W. Yao, X. Wang, P. Loh, X. Zhang, and F. Blaabjerg, "Improved power decoupling scheme for single-phase grid-connected differential inverter with realistic mismatch in storage capacitances," *IEEE Trans. Power Electron.*, vol. 32, no. 1, pp. 186–199, Jan. 2017.

- [27] D. Abeywardana, B. Hredzak, and V. Agelidis, "A rule-based controller to mitigate dc-side second-order harmonic current in a single-phase boost inverter," *IEEE Trans. Power Electron.*, vol. 31, no. 2, pp. 1665–1679, Feb. 2016.
- [28] D. Abeywardana, B. Hredzak, and V. Agelidis, "An input current feedback method to mitigate the dc-side low-frequency ripple current in a single-phase boost inverter," *IEEE Trans. Power Electron.*, vol. 31, no. 6, pp. 4594–4603, Jun. 2016.
- [29] C. Wong, N. Mohan, S. E. Wright, and K. N. Mortensen, "Feasibility study of ac- and dc-side active filters for HVDC converter terminals," *IEEE Trans. Power Del.*, vol. 4, no. 4, pp. 2067–2075, Oct. 1989.
- [30] H. Irie, T. Yamashita, and N. Takemoto, "Improved power decoupling scheme for single-phase grid-connected differential inverter with realistic mismatch in storage capacitances," *Trans. Inst. Electr. Eng. Jpn.*, vol. 112, no. 7, pp. 623–629, May 2016.
- [31] O. Garcia, M. D. Martinez-Avial, J. A. Cobos, J. Uceda, J. Gonzalez, and J. A. Navas, "Harmonic reducer converter," in *Proc. IEEE Annu. Power Electron. Spec. Conf.*, vol. 2, Jul. 2000, pp. 583–587.
- [32] W. Zhang, G. Asplund, A. Aberg, U. Jonsson, and O. Loof, "Active dc filter for HVDC system-a test installation in the Konti-Skan DC link at Lindome converter station," *IEEE Trans. Power Del.*, vol. 8, no. 3, pp. 1599–1606, Jul. 1993.
- [33] S. Dusmez and A. Khaligh, "Generalized technique of compensating low-frequency component of load current with a parallel bidirectional dc/dc converter," *IEEE Trans. Power Electron.*, vol. 29, no. 11, pp. 5892–5904, Nov. 2014.
- [34] O. Garcia, M. D. Martinez-Avial, J. A. Cobos, J. Uceda, J. Gonzalez, and J. A. Navas, "Harmonic reducer converter," *IEEE Trans. Ind. Electron.*, vol. 50, no. 2, pp. 322–327, Apr. 2003.
- [35] A. C. Kyritsis, N. P. Papanikolaou, and E. C. Tatakis, "A novel parallel active filter for current pulsation smoothing on single stage grid-connected ac-pv modules," in *Proc. IEEE Eur. Conf. Power Electron. Appl.*, Sep. 2007, pp. 1–10.
- [36] M. Jang and V. G. Agelidis, "A minimum power-processing stage fuel cell energy system based on a boost-inverter with a bi-directional back-up battery storage," in *Proc. IEEE Annu. Appl. Power Electron. Conf. Expo.*, Feb. 2010, pp. 295–302.
- [37] M. Jang and V. G. Agelidis, "A minimum power-processing-stage fuel-cell energy system based on a boost-inverter with a bidirectional backup battery storage," *IEEE Trans. Power Electron.*, vol. 26, no. 5, pp. 1568–1577, May 2011.
- [38] S. Wang, X. Ruan, K. Yao, and Z. Ye, "A flicker-free electrolytic capacitor-less ac-dc led driver," in *Proc. IEEE Energy Convers. Congr. Expo.*, Sep. 2011, pp. 2318–2325.
- [39] S. Wang, X. Ruan, K. Yao, and Z. Ye, "A flicker-free electrolytic capacitor-less ac-dc led driver," *IEEE Trans. Power Electron.*, vol. 27, no. 11, pp. 4540–4548, Sep. 2012.
- [40] M. Jang, M. Ciobotaru, and V. G. Agelidis, "A single-stage three-phase fuel cell system based on a boost inverter with a battery back-up unit," in *Proc. IEEE Annu. Appl. Power Electron. Conf. Expo.*, Feb. 2012, pp. 2032–2037.
- [41] M. Jang, M. Ciobotaru, and V. G. Agelidis, "A single-phase grid-connected fuel cell system based on a boost-inverter," *IEEE Trans. Power Electron.*, vol. 28, no. 1, pp. 279–288, Jan. 2013.
- [42] W. Cai, B. Liu, S. Duan, and L. Jiang, "An active low-frequency ripple control method based on the virtual capacitor concept for BIPV systems," *IEEE Trans. Power Electron.*, vol. 29, no. 4, pp. 1733–1745, Apr. 2014.
- [43] Y. Yang, X. Ruan, L. Zhang, J. He, and Z. Ye, "Feed-forward scheme for an electrolytic capacitor-less ac/dc led driver to reduce output current ripple," *IEEE Trans. Power Electron.*, vol. 29, no. 10, pp. 5508–5517, Oct. 2014.
- [44] R. Wang, F. Wang, R. Lai, P. Ning, R. Burgos, and D. Boroyevich, "Study of energy storage capacitor reduction for single phase PWM rectifier," in *Proc. IEEE Annu. Appl. Power Electron. Conf. Expo.*, Feb. 2009, pp. 1177–1183.
- [45] R. Wang *et al.*, "A high power density single-phase PWM rectifier with active ripple energy storage," *IEEE Trans. Power Electron.*, vol. 26, no. 5, pp. 1430–1443, May 2011.
- [46] H. Li, K. Zhang, and H. Zhao, "Active dc-link power filter for single phase PWM rectifiers," in *Proc. IEEE ECCE Asia*, May 2011, pp. 2920–2926.
- [47] H. Li, K. Zhang, and H. Zhao, "Dc-link active power filter for high-power single-phase PWM converters," *J. Power Electron.*, vol. 12, no. 3, pp. 458–467, May 2012.
- [48] D. Neumayr, D. Bortis, and J. W. Kolar, "Ultra-compact power pulsation buffer for single-phase dc/ac converter systems," in *Proc. IEEE ECCE Asia*, May 2016, pp. 2732–2741.
- [49] Z. Kong, X. Huang, Z. Wang, J. Xiong, and K. Zhang, "Active power decoupling for submodules of a modular multilevel converter," *IEEE Trans. Power Electron.*, vol. 33, no. 1, pp. 125–136, Jan. 2018.
- [50] K. W. Lee, Y. H. Hsieh, and T. J. Liang, "A current ripple cancellation circuit for electrolytic capacitor-less ac-dc led driver," in *Proc. IEEE Annu. Appl. Power Electron. Conf. Expo.*, Mar. 2013, pp. 1058–1061.
- [51] X. Cao, Q. C. Zhong, and W. L. Ming, "Analysis and control of ripple eliminators in dc systems," in *Proc. IEEE Green Tech. Conf.*, Apr. 2014, pp. 29–36.
- [52] X. Cao, Q. C. Zhong, and W. L. Ming, "Ripple eliminator to smooth dc-bus voltage and reduce the total capacitance required," *IEEE Trans. Ind. Electron.*, vol. 62, no. 4, pp. 2224–2235, Apr. 2015.
- [53] Y. Wang, G. Joos, and H. Jin, "Dc-side shunt active power filter for phase-controlled magnet-load power supplies," in *Proc. IEEE Annu. Power Electron. Spec. Conf.*, Jun. 1994, pp. 183–188.
- [54] Y. Wang, G. Joos, and H. Jin, "Dc-side shunt-active power filter for phase-controlled magnet-load power supplies," *IEEE Trans. Power Electron.*, vol. 12, no. 5, pp. 765–771, Sep. 1997.
- [55] P. T. Krein and R. S. Balog, "Cost-effective hundred-year life for single-phase inverters and rectifiers in solar and led lighting applications based on minimum capacitance requirements and a ripple power port," in *Proc. IEEE Annu. Appl. Power Electron. Conf. Expo.*, Feb. 2009, pp. 620–625.
- [56] P. T. Krein, R. S. Balog, and M. Mirjafari, "Minimum energy and capacitance requirements for single-phase inverters and rectifiers using a ripple port," *IEEE Trans. Power Electron.*, vol. 27, no. 11, pp. 4690–4698, Nov. 2012.
- [57] C. Jin, Y. Tang, P. Wang, X. Liu, D. Zhu, and Frede, "Reduction of dc-link capacitance for three-phase three-wire shunt active power filters," in *Proc. IEEE Annu. Conf. IEEE Ind. Electron. Soc.*, Nov. 2013, pp. 1203–1208.
- [58] Y. Tang, Z. Qin, F. Blaabjerg, and P. C. Loh, "Dq reference frame modeling and control of single-phase active power decoupling circuits," in *Proc. IEEE Annu. Appl. Power Electron. Conf. Expo.*, Mar. 2015, pp. 2725–2732.
- [59] S. Li, W. Qi, S. C. Tan, S. Y. R. Hui, and C. Tse, "A general approach to programmable and reconfigurable emulation of power impedances," *IEEE Trans. Power Electron.*, vol. 33, no. 1, pp. 259–271, Jan. 2018.
- [60] Y. Tang, F. Blaabjerg, and P. C. Loh, "Decoupling of fluctuating power in single-phase systems through a symmetrical half-bridge circuit," in *Proc. IEEE Annu. Appl. Power Electron. Conf. Expo.*, Mar. 2014, pp. 96–102.
- [61] Y. Tang, Z. Qin, F. Blaabjerg, and P. C. Loh, "Decoupling of fluctuating power in single-phase systems through a symmetrical half-bridge circuit," *IEEE Trans. Power Electron.*, vol. 30, no. 4, pp. 1855–1865, Mar. 2015.
- [62] Y. Tang, Z. Qin, F. Blaabjerg, and P. C. Loh, "A dual voltage control strategy for single-phase PWM converters with power decoupling function," in *Proc. IEEE Energy Convers. Congr. Expo.*, Sep. 2014, pp. 4102–4109.
- [63] Y. Tang, Z. Qin, F. Blaabjerg, and P. C. Loh, "A dual voltage control strategy for single-phase PWM converters with power decoupling function," *IEEE Trans. Power Electron.*, vol. 30, no. 12, pp. 7060–7071, Dec. 2015.
- [64] W. Yao, P. C. Loh, Y. Tang, X. Wang, X. Zhang, and F. Blaabjerg, "A robust dc-split-capacitor power decoupling scheme for single-phase converter," *IEEE Trans. Power Electron.*, vol. 32, no. 11, pp. 8419–8433, Nov. 2017.
- [65] W. Yao, X. Wang, P. C. Loh, X. Zhang, and F. Blaabjerg, "Improved power decoupling scheme for single-phase grid-connected differential inverter with realistic mismatch in storage capacitances," in *Proc. Int. Exhib. Conf. Power Electron., Intell. Motion, Renew. Energy Energy Manage.*, May 2016, pp. 1–8.
- [66] M. Chen, K. K. Afridi, and D. J. Perreault, "Stacked switched capacitor energy buffer architecture," in *Proc. IEEE Annu. Appl. Power Electron. Conf. Expo.*, Feb. 2012, pp. 1404–1413.
- [67] M. Chen, K. K. Afridi, and D. J. Perreault, "Stacked switched capacitor energy buffer architecture," *IEEE Trans. Power Electron.*, vol. 28, no. 11, pp. 5183–5195, Feb. 2013.
- [68] K. K. Afridi, M. Chen, and D. J. Perreault, "Enhanced bipolar stacked switched capacitor energy buffers," in *Proc. IEEE Energy Convers. Congr. Expo.*, Sep. 2012, pp. 4209–4216.
- [69] K. Afridi, M. Chen, and D. J. Perreault, "Enhanced bipolar stacked switched capacitor energy buffers," *IEEE Trans. Ind. Appl.*, vol. 50, no. 2, pp. 1141–1149, Mar. 2014.
- [70] C. M. *et al.*, "Enhanced bipolar stacked switched capacitor energy buffers," in *Proc. IEEE Annu. Appl. Power Electron. Conf. Expo.*, Sep. 2016, pp. 1947–1953.

- [71] T. Tanaka and S. Funabiki, "A new method of damping harmonic resonance at the dc-link of a large-capacity rectifier-inverter system," in *Proc. IEEE Int. Conf. Power Electron. Drive Syst.*, Apr. 1999, vol. 2, pp. 888–893.
- [72] T. Tanaka, S. Fujikawa, and S. Funabiki, "A new method of damping harmonic resonance at the dc-link in large capacity rectifier-inverter systems using a novel regenerating scheme," in *Proc. IEEE Ind. Appl. Conf.*, Sep. 2001, vol. 1, pp. 316–322.
- [73] T. Tanaka, S. Fujikawa, and S. Funabiki, "A new method of damping harmonic resonance at the dc link in large-capacity rectifier-inverter systems using a novel regenerating scheme," *IEEE Trans. Ind. Appl.*, vol. 38, no. 4, pp. 1131–1138, Jul. 2002.
- [74] H. Chung and T. Yan, "Output compensator for a regulator," US Patent 8 169 201B2, May 2006.
- [75] K. Li, J. Liu, G. Xiao, and Z. Wang, "Novel load ripple voltage-controlled parallel dc active power filters for high performance magnet power supplies," *IEEE Trans. Nucl. Sci.*, vol. 53, no. 3, pp. 1530–1539, Jun. 2006.
- [76] S. Qin, Y. Lei, C. Barth, W. C. Liu, and R. C. N. Pilawa-Podgurski, "Architecture and control of a high energy density buffer for power pulsation decoupling in grid-interfaced applications," in *Proc. IEEE 16th Workshop Control Model. Power Electron.*, Jul. 2015, pp. 1–8.
- [77] H. Wang and H. Wang, "An active capacitor with self-power and internal feedback control signals," in *Proc. IEEE Energy Convers. Congr. Expo.*, Oct. 2017, pp. 3484–3488.
- [78] Z. Liao, N. C. Brooks, and R. C. N. Pilawa-Podgurski, "Design constraints for series-stacked energy decoupling buffers in single-phase converters," *IEEE Trans. Power Electron.*, vol. 33, no. 9, pp. 7305–7308, Sep. 2018.
- [79] V. M. Iyer and V. John, "Low-frequency dc bus ripple cancellation in single phase pulse-width modulation inverters," *IET Power Electron.*, vol. 8, no. 4, pp. 497–506, Jun. 2015.
- [80] V. Michal, "Switched-mode active decoupling capacitor allowing volume reduction of the high-voltage dc filters," *IEEE Trans. Power Electron.*, vol. 31, no. 9, pp. 6104–6111, Sep. 2016.
- [81] S. Qin, Y. Lei, C. Barth, W. C. Liu, and R. C. N. Pilawa-Podgurski, "A high power density series-stacked energy buffer for power pulsation decoupling in single-phase converters," *IEEE Trans. Power Electron.*, vol. 32, no. 6, pp. 4905–4924, Jun. 2017.
- [82] Y. Lei *et al.*, "A 2 kw, single-phase, 7-level, GaN inverter with an active energy buffer achieving 216 w/in³ power density and 97.6% peak efficiency," in *Proc. IEEE Appl. Power Electron. Conf. Expo.*, Mar. 2016, pp. 1512–1519.
- [83] H. Wang and H. Wang, "A two-terminal active capacitor," *IEEE Trans. Power Electron.*, vol. 32, no. 8, pp. 5893–5896, Aug. 2017.
- [84] H. Wang, Y. Liu, and H. Wang, "On the practical design of a two-terminal active capacitor," *IEEE Trans. Power Electron.*, vol. 34, no. 10, pp. 10006–10020, Oct. 2019.
- [85] H. Wang and H. Chung, "Study of a new technique to reduce the dc-link capacitor in a power electronic system by using a series voltage compensator," in *Proc. IEEE Energy Convers. Congr. Expo.*, Sep. 2011, pp. 4051–4057.
- [86] H. Wang, H. S. H. Chung, and W. Liu, "Use of a series voltage compensator for reduction of the dc-link capacitance in a capacitor-supported system," *IEEE Trans. Power Electron.*, vol. 29, no. 3, pp. 1163–1175, Mar. 2014.
- [87] W. Liu, K. Wang, H. S. H. Chung, and S. T. H. Chuang, "Modeling and design of series voltage compensator for reduction of dc-link capacitance in grid-tie solar inverter," *IEEE Trans. Power Electron.*, vol. 30, no. 5, pp. 2534–2548, May 2015.
- [88] Y. Qiu, L. Wang, H. Wang, Y. F. Liu, and P. C. Sen, "Bipolar ripple cancellation method to achieve single-stage electrolytic-capacitor-less high-power led driver," *IEEE J. Emerg. Sel. Topics Power Electron.*, vol. 3, no. 3, pp. 698–713, Sep. 2015.
- [89] V. S. P. Cheung, H. S. H. Chung, and A. W. L. Lo, "A modular and scalable structure using multiparallel-connected series-voltage compensators for supply voltage regulation," *IEEE Trans. Power Electron.*, vol. 31, no. 6, pp. 4096–4110, Jun. 2016.
- [90] X. Lyu, N. Ren, Y. Li, and D. Cao, "A SiC-based high power density single-phase inverter with in-series and in-parallel power decoupling method," *IEEE J. Emerg. Sel. Topics Power Electron.*, vol. 4, no. 3, pp. 893–901, Sep. 2016.
- [91] B. J. Pierquet and D. J. Perreault, "A single-phase photovoltaic inverter topology with a series-connected power buffer," in *Proc. IEEE Energy Convers. Congr. Expo.*, Sep. 2010, pp. 2811–2818.
- [92] B. J. Pierquet and D. J. Perreault, "A single-phase photovoltaic inverter topology with a series-connected energy buffer," *IEEE Trans. Power Electron.*, vol. 28, no. 10, pp. 4603–4611, Oct. 2013.
- [93] T. Shimizu, T. Fujita, G. Kimura, and J. Hirose, "Unity power factor PWM rectifier with DC ripple compensation," *IEEE Trans. Ind. Electron.*, vol. 44, no. 4, pp. 447–455, Aug. 1997.
- [94] G. Zhu, H. Wang, B. Liang, S.-C. Tan, and J. Jiang, "Enhanced single-phase full-bridge inverter with minimal low-frequency current ripple," *IEEE Trans. Ind. Electron.*, vol. 63, no. 2, pp. 937–943, Feb. 2016.
- [95] H. Li, K. Zhang, H. Zhao, S. Fan, and J. Xiong, "Active power decoupling for high-power single-phase PWM rectifiers," *IEEE Trans. Power Electron.*, vol. 28, no. 3, pp. 1308–1319, Mar. 2013.
- [96] S. Liang, X. Lu, R. Chen, Y. Liu, S. Zhang, and F. Z. Peng, "A solid state variable capacitor with minimum dc capacitance," in *Proc. IEEE Annu. Appl. Power Electron. Conf. Expo.*, Mar. 2014, pp. 3496–3501.
- [97] R. Chen, S. Liang, and F. Z. Peng, "Generalized active power decoupling method for H-bridge with minimum voltage and current stress," in *Proc. IEEE Energy Convers. Congr. Expo.*, Sep. 2014, pp. 4421–4427.
- [98] R. Chen, Y. Liu, and F. Z. Peng, "Dc capacitor-less inverter for single-phase power conversion with minimum storage capacitance and current stress," *IEEE Trans. Power Electron.*, vol. 30, no. 10, pp. 5499–5507, Oct. 2015.
- [99] H. Wu, S.-C. Wong, C. K. Tse, and Q. Chen, "Control and modulation of bidirectional single-phase ac-dc three-phase-leg SPWM converters with active power decoupling and minimal storage capacitance," *IEEE Trans. Power Electron.*, vol. 31, no. 6, pp. 4226–4240, Jun. 2016.
- [100] Y. Liu, B. Ge, and H. Abu-Rub, "An active power decoupling quasi-z-source cascaded multilevel inverter," in *Proc. IEEE Annu. Conf. IEEE Ind. Electron. Soc.*, Oct. 2016, pp. 6453–6458.
- [101] J. Liao, J. Su, L. Chang, and J. Lai, "A mixed decoupling power method for single-phase grid-connected inverters," in *Proc. IEEE Int. Symp. Power Electron. Distrib. Generation Syst.*, Jun. 2016, pp. 1–5.
- [102] B. Ge *et al.*, "Direct instantaneous ripple power predictive control for active ripple decoupling of single-phase inverter," in *Proc. IEEE Energy Convers. Congr. Expo.*, Sep. 2016, pp. 1–7.
- [103] Y. Li, W. Gao, J. Li, R. Zhang, and F. Fang, "Double line frequency ripple cancelling for single-phase quasi-z-source inverter," in *Proc. IEEE Energy Convers. Congr. Expo.*, Sep. 2016, pp. 1–6.
- [104] Y. Liu, B. Ge, H. Abu-Rub, H. Sun, F. Z. Peng, and Y. Xue, "Model predictive direct power control for active power decoupled single-phase quasi-z-source inverter," *IEEE Trans. Ind. Informat.*, vol. 12, no. 4, pp. 1550–1559, Aug. 2016.
- [105] X. Liu, P. Wang, P. C. Loh, F. Blaabjerg, and M. Xue, "Six switches solution for single-phase ac/dc/ac converter with capability of second-order power mitigation in dc-link capacitor," in *Proc. IEEE Energy Convers. Congr. Expo.*, Sep. 2011, pp. 1368–1375.
- [106] S. Fan, Y. Xue, and K. Zhang, "A novel active power decoupling method for single-phase photovoltaic or energy storage applications," in *Proc. IEEE Energy Convers. Congr. Expo.*, Sep. 2012, pp. 2439–2446.
- [107] S. Liang, F. Z. Peng, and D. Cao, "A six-switch solid state variable capacitor with minimum dc capacitance," in *Proc. IEEE Energy Convers. Congr. Expo.*, Sep. 2014, pp. 4954–4959.
- [108] N. B. Y. Gorla, K. Ali, P. Das, and S. K. Panda, "Analysis of active power decoupling in single-phase rectifier using six-switch topology," in *Proc. IEEE 2nd Annu. Southern Power Electron. Conf.*, Dec. 2016, pp. 1–6.
- [109] W. Cai, L. Jiang, B. Liu, S. Duan, and C. Zou, "A power decoupling method based on four-switch three-port DC/DC/AC converter in dc microgrid," in *Proc. IEEE Energy Convers. Congr. Expo.*, Sep. 2013, pp. 4678–4682.
- [110] W. Cai, L. Jiang, B. Liu, S. Duan, and C. Zou, "A power decoupling method based on four-switch three-port DC/DC/AC converter in dc microgrid," *IEEE Trans. Ind. Appl.*, vol. 51, no. 1, pp. 336–343, Sep. 2015.
- [111] W. Qi, H. Wang, X. Tan, G. Wang, and K. Ngo, "A novel active power decoupling single-phase PWM rectifier topology," in *Proc. IEEE Annu. Appl. Power Electron. Conf. Expo.*, Mar. 2014, pp. 89–95.
- [112] Y. Tang and F. Blaabjerg, "A component-minimized single-phase active power decoupling circuit with reduced current stress to semiconductor switches," *IEEE Trans. Power Electron.*, vol. 30, no. 6, pp. 2905–2910, Jun. 2015.
- [113] W. Ming and Q. Zhong, "A single-phase rectifier having two independent voltage outputs with reduced fundamental frequency voltage ripples," *IEEE Trans. Power Electron.*, vol. 30, no. 7, pp. 3662–3673, Jul. 2015.
- [114] S. Li, W. Qi, S.-C. Tan, and S. Y. R. Hui, "Integration of an active filter and a single-phase AC/DC converter with reduced capacitance requirement and component count," *IEEE Trans. Power Electron.*, vol. 31, no. 6, pp. 4121–4137, Jun. 2016.
- [115] H. Hu, S. Harb, N. Kutkut, I. Batarseh, and Z. J. Shen, "A review of power decoupling techniques for microinverters with three different decoupling capacitor locations in PV systems," *IEEE Trans. Power Electron.*, vol. 28, no. 6, pp. 2711–2726, Jun. 2013.

- [116] Y. Sun, Y. Liu, M. Su, W. Xiong, and J. Yang, "Review of active power decoupling topologies in single-phase systems," *IEEE Trans. Power Electron.*, vol. 31, no. 7, pp. 4778–4794, Jul. 2016.
- [117] M. A. Vitorino, L. F. S. Alves, R. Wang, and M. B. de Rossiter Correa, "Low-frequency power decoupling in single-phase applications: A comprehensive overview," *IEEE Trans. Power Electron.*, vol. 32, no. 4, pp. 2892–2912, Apr. 2017.
- [118] H. Wang, H. Wang, G. Zhu, and F. Blaabjerg, "A generic topology derivation method for single-phase converters with active capacitive dc-links," in *Proc. IEEE Energy Convers. Congr. Expo.*, Sep. 2016, pp. 1–8.
- [119] H. Wang, H. Wang, G. Zhu, and F. Blaabjerg, "Cost assessment of three power decoupling methods in a single-phase power converter with a reliability oriented design procedure," in *Proc. IEEE ECCE Asia*, May 2016, pp. 3818–3825.
- [120] X. Pei, W. Zhou, and Y. Kang, "Analysis and calculation of dc-link current and voltage ripples for three-phase inverter with unbalanced load," *IEEE Trans. Power Electron.*, vol. 30, no. 10, pp. 5401–5412, Oct. 2015.
- [121] M. Angulo, D. A. Ruiz-Caballero, J. Lago, M. L. Heldwein, and S. A. Mussa, "Active power filter control strategy with implicit closed-loop current control and resonant controller," *IEEE Trans. Ind. Electron.*, vol. 60, no. 7, pp. 2721–2730, Jul. 2013.
- [122] [Online]. Available: www.infineon.com
- [123] [Online]. Available: www.digikey.com
- [124] K. Ma, A. S. Bahman, S. Beczkowski, and F. Blaabjerg, "Complete loss and thermal model of power semiconductors including device rating information," *IEEE Trans. Power Electron.*, vol. 30, no. 5, pp. 2556–2569, May 2015.
- [125] [Online]. Available: <https://www.mag-inc.com/Design/Design-Tools>
- [126] R. Burkart and J. W. Kolar, "Component cost models for multi-objective optimizations of switched-mode power converters," in *Proc. IEEE Energy Convers. Congr. Expo.*, Sep. 2013, pp. 2139–2146.



Haoran Wang (S'15–M'18) received the B.S. and M.S. degrees in control science and engineering from Wuhan University of Technology, Wuhan, China, in 2012 and 2015, respectively, and the Ph.D. degree in power electronics from Center of Reliable Power Electronics, Aalborg University, Aalborg, Denmark, in 2018.

He is currently a Postdoctoral Research Fellow with Aalborg University. From July 2013 to September 2014, he was a Research Assistant with the Department of Electrical Engineering, Tsinghua University, Beijing, China. He was a Visiting Scientist with the ETH Zurich, Zurich, Switzerland, from December 2017 to April 2018. His research interests include capacitors in power electronics, reliability of power electronic systems, and multi-objective life-cycle performance optimization of power electronic systems.



Huai Wang (M'12–SM'17) received the B.E. degree in electrical engineering, from Huazhong University of Science and Technology, Wuhan, China, in 2007, and the Ph.D. degree in power electronics from the City University of Hong Kong, Hong Kong, in 2012.

He is currently a Professor with the Center of Reliable Power Electronics, Aalborg University, Aalborg, Denmark. He was a Visiting Scientist with the ETH Zurich, Zurich, Switzerland, from August to September 2014, and with the Massachusetts Institute of Technology, Cambridge, MA, USA, from September to November 2013. He was with the ABB Corporate Research Center, Baden, Switzerland, in 2009. His research interests include the fundamental challenges in modeling and validation of power electronic component failure mechanisms, and application issues in system-level predictability, condition monitoring, circuit architecture, and robustness design.

Dr. Wang received the Richard M. Bass Outstanding Young Power Electronics Engineer Award from the IEEE Power Electronics Society in 2016 and the Green Talents Award from the German Federal Ministry of Education and Research in 2014. He is currently the Award Chair of the Technical Committee of the High Performance and Emerging Technologies, IEEE Power Electronics Society, and the Chair of IEEE PELS/IAS/IE Chapter in Denmark. He serves as an Associate Editor of *IET Power Electronics*, *IEEE JOURNAL OF EMERGING AND SELECTED TOPICS IN POWER ELECTRONICS*, and *IEEE TRANSACTIONS ON POWER ELECTRONICS*.



Guorong Zhu (M'11–SM'15) was born in Hunan, China. She received the Ph.D. degree in electrical engineering from Huazhong University of Science and Technology, Wuhan, China, in 2009.

From 2002 to 2005, she was a Lecturer with the School of Electrical Engineering, Wuhan University of Science and Technology, Wuhan. From 2009 to 2011, she was a Research Assistant/Research Associate with the Department of Electronic and Information Engineering, Hong Kong Polytechnic University, Kowloon, Hong Kong. From 2016 to 2017, she was a Visiting Scholar with the Department of Energy Technology, Aalborg University, Aalborg, Denmark. She is currently an Associate Professor with the School of Automation, Wuhan University of Technology, Wuhan. Her research interests include the areas of power electronics equipment reliability, battery energy storage technology, and wireless power transfer technology.



Frede Blaabjerg (S'86–M'88–SM'97–F'03) was with ABB-Scandia, Randers, Denmark, from 1987 to 1988. He received the Ph.D. degree in electrical engineering with Aalborg University, Aalborg, Denmark, in 1995.

He became an Assistant Professor in 1992, an Associate Professor in 1996, and a Full Professor of power electronics and drives in 1998. In 2017, he became a Villum Investigator. His current research interests include power electronics and its applications such as in wind turbines, PV systems, reliability, harmonics, and adjustable speed drives. He has published more than 500 journal papers in the fields of power electronics and its applications. He is the co-author of two monographs and editor of seven books in power electronics and its applications.

Dr. Blaabjerg has received 24 IEEE Prize Paper awards, the IEEE PELS Distinguished Service Award in 2009, the EPE-PEMC Council Award in 2010, the IEEE William E. Newell Power Electronics Award 2014, and the Villum Kann Rasmussen Research Award 2014. He was the Editor-in-Chief of the *IEEE TRANSACTIONS ON POWER ELECTRONICS* from 2006 to 2012. He has been Distinguished Lecturer for the IEEE Power Electronics Society from 2005 to 2007 and for the IEEE Industry Applications Society from 2010 to 2011 as well as 2017 to 2018. In 2018, he was the President Elect of IEEE Power Electronics Society. He has been nominated in 2014, 2015, 2016, and 2017 by Thomson Reuters to be between the 250 most cited researchers in engineering in the world. In 2017, he became Honoris Causa with University Politehnica Timisoara, Timisoara, Romania.