

Resonant Current Estimation and Phase-Locked Loop Feedback Design for Piezoelectric Transformer-Based Power Supplies

Zijiang Yang , Jack Forrester , Jonathan N. Davidson , Martin P. Foster , and David A. Stone 

Abstract—A control system to achieve zero-voltage switching (ZVS) for an inductorless half-bridge piezoelectric transformer-based resonant power supply is presented. Both the phase and frequency of the resonant current are locked to the switching waveform using an analog phase-locked loop (PLL) to ensure ZVS operation. We present two resonant current estimation circuits, which generate the reference signals for the PLL. We also present three PLL feedback designs to produce the in-phase gate drive signals with adequate deadtime. The operating principle of the control system and its ability to achieve ZVS operation are discussed. Experimental results of the PLL circuit verify the successful operation of the proposed system. The six permutations of current estimation and feedback are contrasted and conclusions for application-specific usage are made.

Index Terms—Phase-locked loop (PLL), piezoelectric transformer (PT), resonant power supply, zero-voltage switching (ZVS).

I. INTRODUCTION

PIEZOELECTRIC transformer (PT) based switched-mode power supplies (SMPS) have been commercialized for many applications [1]–[4]. Compared with magnetic transformers, they exhibit low electromagnetic interference (EMI), high power density, high efficiency, and reduced weight [5]–[8]. Additionally, the manufacturing process of PTs is simpler than electromagnetic transformers because core assembly and windings are not required. However, PTs experience fundamental limits on energy transfer due to strain, surface charge density, stress, electric field strength, and mechanical losses [9], [10]. As reported in the literature, 97% efficiency has been achieved for a radial vibration-mode PT [11]. The power rating for PTs ranges from 5 (longitudinal vibration-mode double-polarization PT) to 40 W/cm³ (radial vibration-mode thickness polarization PT) with a typical power of 40 W [11]. PTs show a resonant peak around their natural frequency since they are usually

constructed from high-quality materials, such as lead zirconate titanate (PZT). For high efficiency and high-power operations, PTs normally operate in a narrow frequency band close to their primary resonant frequency, with a matched load at the output of the transformer. The optimum operating frequency of a PT is dependent on parameters including load, temperature, geometric design, PT vibration mode (e.g., radial, thickness shear), and material selection [5], [12], [13].

Several circuit topologies have been investigated to drive PTs, including push–pull [5], class-E [13], and half bridge [14]. Although the inductorless half-bridge configuration shows the best performance in terms of size and cost, as it eliminates the need for any magnetic components at the expense of increased deadtime and difficulty of control [15], [16], the operating frequency is reduced to a narrow band slightly above resonance, where the PT exhibits inductive behavior.

The control strategies for PT-based converters reported in the literature include pulsewidth modulation (PWM) [17], pulse-frequency modulation (PFM) [18], pulse-density modulation [19], and phase-locked loop (PLL) [20]. Specifically, [17] and [20] realize both soft switching and output voltage regulation, while [18] and [19] only achieve the output voltage regulation. In [21], a combination of PWM and PFM is used for line and load regulation of an ac/dc converter. The circuit in [21] employed PWM at a fixed switching frequency for low output voltages and employed PFM at a fixed duty ratio for high output voltage. An overall efficiency of 80% was achieved with a 17 V output at 12 Ω load over an input voltage range of 90–270 V. For PT-based inductorless configurations, an input matching network has been introduced in [19] and [22], while a self-oscillating control system is implemented in [2] to achieve zero-voltage switching (ZVS).

In [19], pulse-density modulation is employed to regulate the output voltage, with an input matching network implemented to reduce switching harmonics, achieving a total efficiency of 80%. A multiloop control strategy is used to modify the number of ON/OFF cycles, switching frequency, burst-mode period, and deadtime, which can be dynamically adjusted.

In [20], a PLL with PWM control is implemented for line regulation. The reference input of the control circuit is generated by comparing the demodulation signal of the secondary voltage and the injected low-frequency reference signal. A 40-W dc/dc converter using this control strategy shows a wide soft-switching region independent of load variations, achieving 75% efficiency

Manuscript received October 2, 2019; revised December 19, 2019 and January 24, 2020; accepted February 13, 2020. Date of publication March 4, 2020; date of current version June 23, 2020. This work was supported by Engineering and Physical Sciences Research Council under Grant EP/P015859/1. Recommended for publication by Associate Editor J. M. Alonso. (Corresponding author: Zijiang Yang.)

The authors are with the Department of Electronic and Electrical Engineering, University of Sheffield, Sheffield S1 3JD, U.K. (e-mail: zyang53@sheffield.ac.uk; jforrester1@sheffield.ac.uk; jonathan.davidson@sheffield.ac.uk; m.p.foster@sheffield.ac.uk; d.a.stone@sheffield.ac.uk).

Color versions of one or more of the figures in this article are available online at <http://ieeexplore.ieee.org>.

Digital Object Identifier 10.1109/TPEL.2020.2976206

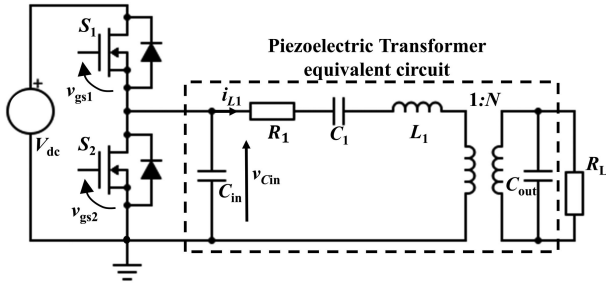


Fig. 1. Inductorless H-bridge PT-based converter with Mason equivalent circuit.

when supplying 20 V at loads ranging from 50 to 500 Ω . However, each of these control methods reported in the literature experiences one or more of the following drawbacks.

- 1) The resonant frequency drift of the PT is uncompensated. The resonant frequency varies with the load and temperature [23], [24]. As the efficiency of a PT is maximized when it operates close to its resonant frequency, any uncompensated change in the resonant frequency can decrease efficiency. Therefore, a highly sensitive adjustable control strategy is required to maintain the high-efficiency operation, such as PLL control [25], adaptive phase control [20], or self-oscillating control [26].
- 2) The feedback signal is taken from the secondary side of the PT. This is likely to be the only choice for the feedback controller since the power stage is directly coupled to the primary section of the PT. Unless suitable steps are taken, feedback to the power stage bypasses the isolation barrier from the PT and increases the risk of EMI [27]. Mitigating steps increase the circuit size, increase cost, and diminish the benefits of using a PT [1], [28]. Hence, approaches that take feedback from the primary side have emerged. Currents and voltages from the Mason equivalent circuit (see Fig. 1) can be estimated/measured, and the converter is switched when the estimated reference signal passes through its zero crossing or peak [26], [29].
- 3) High efficiency and ZVS are hard to achieve for the inductorless topology. This is because the less resonant current is provided during the deadtime [30]. In [19] and [22], an input matching network is introduced for ZVS optimization. However, total efficiency is decreased since part of the energy is consumed by the matching network. Moreover, the PT's driving waveform generated by the matching network is not ideal; hence, other higher order harmonics are introduced and cannot be ignored in practice. Other solutions, such as self-oscillating control, have been proposed for the inductorless configuration [2]. With phase compensation introduced in the control loop, the phase angle of total feedback loop is adjusted to a multiple integer of 2π .

To address these problems, a resonant current estimation circuit together with a self-oscillating phase-shift compensation approach was introduced in [26] and [31]. The resonant current is estimated by an RC network before the PT input section. Current peaks [31] and zero-crossing points [26] of the resonant

current are sensed and used for switch timing. The principle of phase compensation is to track the resonant frequency change in a PT with cycle-by-cycle adjustments. An integer multiple of 2π is required for the entire control loop according to the Barkhausen criterion, to ensure that the resonant current and PT input voltage are in phase. However, when the resonant frequency changes, multiperiod lock-in delays can be introduced, which is not desirable for fast tracking. In addition, this approach requires a self-induced oscillation to excite the PT vibration near the resonant frequency during system initialization. Since the controller must operate as an oscillator and, during start up, operates with a frequency lower than the PT's resonant frequency for [26], the following problems occur:

- 1) the feedback controller becomes unstable due to 180° phase change in the control characteristics [26];
- 2) the efficiency of the PT is reduced because the converter is operating below the resonant frequency.

Soft switching is not preserved during lock-in delay as the driver has not reached a steady state.

In this article, we present a comparative analysis of six variants of a PLL controller, which overcome these problems. Two resonant current estimators and three gate signal generators are proposed and evaluated to mitigate issues of resonant frequency drift, eliminate coupling across the isolation barrier, and enable faster circuit initialization. The designs lock on to the resonant frequency, ensuring $\pi/2$ radians deadtime (demonstrated as necessary in [30]) and, therefore, achieving ZVS. The controller's ability to lock on to the phase and frequency, irrespective of operating conditions and temperature, makes PLL control highly desirable in this application.

The contribution of the proposed work includes: 1) achieving ZVS in an inductorless PT-based SMPS using a PLL; 2) proposal of two current estimators and their implementation within a PLL; and 3) proposal of three steering logic and gate signal generators implemented specifically for a 4046 PLL controller.

We draw on the previous work where we developed a design criterion to ensure a PT in an inductorless topology can be operated at the resonant frequency with ZVS for all loads if input-to-output capacitance ratio satisfies $C_{in}/NC_{out} \leq 2/\pi$ with $\pi/2$ deadtime [30]. The present article is organized as follows. The basic operation of PT-based inductorless converters is given in Section II. Approaches to produce a feedback signal for the controller using current estimators are proposed and explained in Section III-A. A mixed analog-digital implementation of the PLL controller is proposed with different configurations, and given in Section III-B. Experimental results, including a comparative analysis, from a practical implementation are described in Section IV to demonstrate the viability of the proposed approach and discuss the choice of topology for different applications. Finally, the article is concluded in Section V.

II. OPERATION OF PT-BASED INDUCTORLESS RESONANT CONVERTER

PTs generally have high Q-factor bandpass filter characteristics when they operate close to their primary resonant frequency. There are typically several other modes,

but, for a well-designed PT operated close to its primary vibration mode, these can be neglected. Their mechanical resonance and piezoelectric effect can be modeled by the simplified Mason equivalent circuit, as shown in Fig. 1 [23], [32].

C_{in} and C_{out} represent the input and output terminal electrode capacitances, respectively. The acoustic mechanical resonant behavior is captured by L_1 , C_1 , and N . R_1 models the effect of mechanical damping and, hence, power loss in the PT. The half-bridge MOSFETs S_1 and S_2 operate in antiphase. An adequate deadtime is required to provide sufficient input capacitor charging time. Insufficient deadtime results in the input capacitance-voltage v_{Cin} failing to reach the dc input voltage V_{dc} before S_1 is turned ON, thereby generating switching losses.

The typical operation for inductorless PT-based resonant converters exhibits one of the following three modes during a half-cycle period.

M1: S_1 and S_2 are OFF. PT input capacitance-voltage v_{Cin} is charged (or discharged) toward the dc input voltage V_{dc} (or 0) by inductor current i_{L1} . This is the deadtime period.

M2: v_{Cin} has exceeded V_{dc} (or fallen below 0) and the body diode of S_1 (or S_2) is conducting, causing v_{Cin} to be V_{fwd} above V_{dc} (or V_{fwd} below 0), where V_{fwd} is the forward voltage drop of the MOSFET body diode.

M3: S_1 (or S_2) is ON and v_{Cin} is maintained at V_{dc} (or 0).

The switching waveforms of a PT-based converter are shown in Fig. 2 under two different scenarios: ZVS achieved and ZVS not achieved. The high quality of the resonant tank allows us to assume i_{L1} is sinusoidal. t_d (or δ radians) and t_1 (or ϕ radians) refer to the deadtime and phase delay between the PT input capacitance-voltage and resonant current, respectively. v_{gs1} and v_{gs2} correspond to half-bridge MOSFET gate drive signals.

In Fig. 2(a), ZVS is achieved following the mode sequence $M_1 \rightarrow M_2 \rightarrow M_3$. During deadtime $0 < t \leq t_d$, the PT input voltage v_{Cin} exceeds V_{dc} , inducing the conduction of the body diode of S_1 until S_1 is turned ON at $t = t_d$. Since the MOSFETs are current-bidirectional switches, reverse resonant current flows through S_1 during $t_d \leq t < t_1$. In contrast, the non-ZVS condition is shown in Fig. 2(b) with corresponding switching waveforms. Here, v_{Cin} does not reach V_{dc} during the deadtime and power dissipation occurs due to the near-instantaneous discharge of v_{Cin} as S_1 turns ON.

As discussed in [30], a low input-to-output capacitance ratio indicates either less charge required by the input capacitance or more charge available from the resonant current. It results in a reduced deadtime requirement and, therefore, makes it easier for v_{Cin} to reach the dc rail (or 0). In terms of load condition, the matched load is the load that gives the lowest resonant current because it is the highest efficiency point [9]. It therefore takes longer to charge the input capacitor during the deadtime period [30]. If ZVS can be achieved at a matched load, ZVS is achievable for all load conditions. The matched load is given as follows:

$$R_L = \frac{1}{\omega_0 C_{out}} \quad (1)$$

where ω_0 is the operating frequency [9].

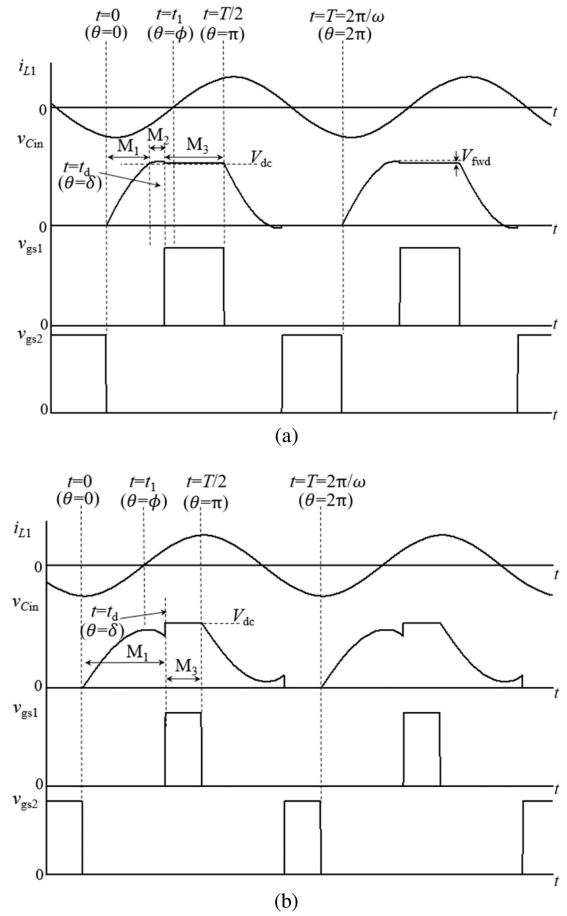


Fig. 2. Switching waveforms of the inductorless H-bridge PT-based converter. (a) ZVS achieved. (b) ZVS not achieved.

To guarantee ZVS for a PT-based inductorless topology, the design criterion developed in [30] is used in this work. The input-to-output capacitance ratio is set to be $C_{in}/NC_{out} = 2/\pi$ with $\pi/2$ deadtime at matched load conditions. The input capacitance-voltage v_{Cin} is, hence, maximized at the end of the deadtime interval. When the ZVS criterion is satisfied, the resonant current must be in phase with the MOSFET gate drive signal, thereby, ensuring that the deadtime starts at the negative peak of the resonant current since it is here that the fastest charging of PT input capacitor occurs.

III. OPERATION OF THE PROPOSED ZVS PLL CONTROL SYSTEM

The proposed ZVS control system consists of a resonant current estimation circuit and PLL controller, as shown in Fig. 3. Since the ideal operating frequency of the PT is temperature and load dependent, as well as being subject to manufacturing tolerances, to account for these variations, a suitable limit to the operating frequency range, typically $\pm 5\%$ of PT's resonant frequency, must be applied using the PLL.

The PLL controller is implemented by a CD4046 to lock on to the phase and frequency of the resonant current and provide the in-phase switching signals via steering logic to achieve ZVS. A resonant current estimator is employed to reconstruct the Mason

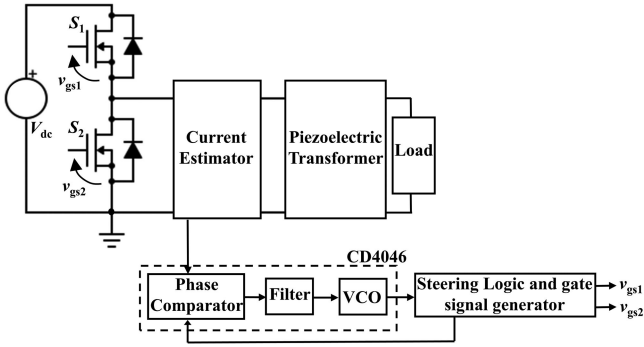


Fig. 3. Block diagram of the ZVS PLL control system.

equivalent resonant current as a feedback signal applied to the PLL controller.

The CD4046 consists of the phase comparator, a low-pass filter (LPF), and a voltage-controlled oscillator (VCO). Previous literature on the PT-based controller design introduces self-induced oscillation to initialize the PT-based converter, which results in the additional circuitry and time required for self-excitation of the resonant current [26], [33]. This can be eliminated if the VCO range covers only the possible operating frequencies. At the system start up, when no input signal has been applied to the PLL, the error voltage at the output of the phase comparator is zero. The VCO, therefore, initially operates at its minimum frequency, which is set close to resonant frequency to ensure a fast system initialization.

We use the type-II phase comparator of CD4046 that integrates the phase error and therefore ensures, once the PLL has locked on, that the phase error is zero. The LPF performs this integration and also reduces the phase noise to produce a stable voltage for the VCO. The PLL's output frequency, therefore, increases from its minimum until the output is locked in phase and frequency to the resonant current, and ZVS will, therefore, be achieved if the critical design criterion is met [30].

The performance, complexity, and versatility of the controller depend on the particular implementations of the steering logic (which produces the gate signals and phase feedback) and the resonant current estimator. In the following sections, we present a number of options that provide six implementations. Each is present and analyzed individually, and the final complete implementations are compared. Both simulation and experimental results are provided to demonstrate the versatility of the proposed control systems. A matched load is applied in this work since it indicates the most challenging operating ZVS condition [24]. If ZVS is achieved at the matched load, ZVS operation is possible at any load.

A. Resonant Current Estimation

We will present two current estimation techniques. The first is well known in the literature [34], but needs careful differential amplification and requires additional resistance. We subsequently propose a new technique, based on similar mathematics, which eliminates the need for resistors and does not need a differential amplifier.

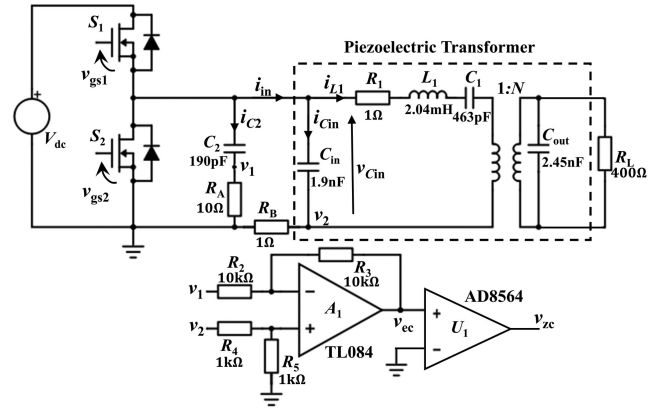


Fig. 4. Current estimator 1 (the voltage differentiator).

1) *Current Estimator 1. Voltage Differentiator:* Current estimator 1, as shown in Fig. 4, differentiates the PT input voltage v_{Cin} to estimate the capacitor current i_{Cin} during deadtime. C_2 and R_A form an approximate differentiator if $R_A C_2 \ll T$, where T is the switching period. The midpoint voltage v_1 provides a derivative signal of the PT input voltage v_{Cin} . During dead time, the capacitor currents for C_{in} and C_2 can be found (assuming $R_A C_2 \ll T$ and $R_B C_{in} \ll T$) from the following:

$$i_{Cin} = C_{in} \frac{dv_{Cin}}{dt} \quad (2)$$

$$i_{C2} = C_2 \frac{dv_{Cin}}{dt} \quad (3)$$

$$v_1 = i_{C2} R_A. \quad (4)$$

Solving (1)–(3) results in

$$v_1 = \frac{R_A C_2}{C_{in}} i_{Cin} \quad (5)$$

which shows that v_1 is a scaled version of the PT input capacitor current i_{Cin} .

The PT input current i_{in} is detected by the sensing resistor R_B . Since

$$i_{in} = i_{Cin} + i_{L1} \quad (6)$$

$$v_2 = (i_{L1} + i_{Cin}) R_B. \quad (7)$$

Substituting (4) into (6) and rearranging provides (7) for the resonant current

$$i_{L1} = \frac{v_2}{R_B} - \frac{v_1 C_{in}}{R_A C_2}. \quad (8)$$

The resonant current, i_{L1} , can be estimated using a differential amplifier. R_2 , R_3 , R_4 , and R_5 set the gain as

$$v_{ec} = v_2 \frac{R_5 / (R_4 + R_5)}{R_2 / (R_2 + R_3)} - v_1 \frac{R_3}{R_2}. \quad (9)$$

Comparing (8) and (9), it can be seen that with the careful selection of component values, $v_{ec} \propto i_{L1}$.

It should be noticed that the total effective capacitance at the PT input is increased since C_2 is introduced, ZVS is harder

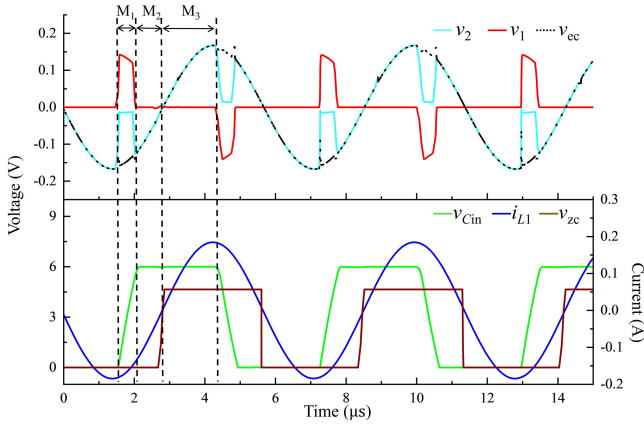


Fig. 5. Operating waveforms of current estimator 1.

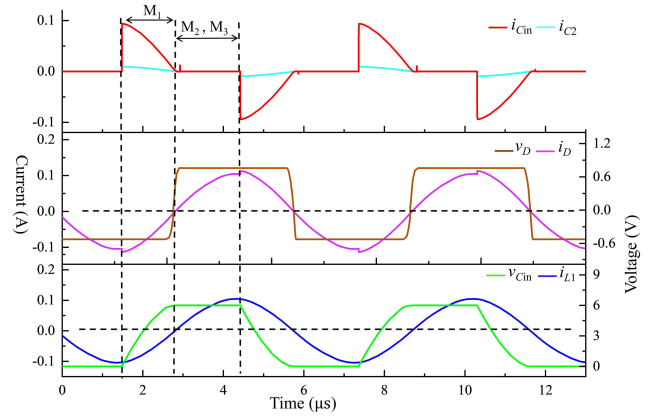


Fig. 7. Operating waveforms of current estimator 2.

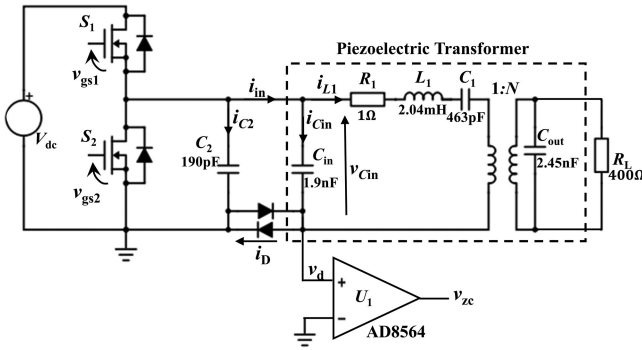


Fig. 6. Current estimator 2 (the antiparallel diode sign detector).

to achieve. Therefore, C_2 should be much smaller than C_{in} in order to minimize its effect on the PT performance and the ZVS capability [2], [24] (e.g., ten times smaller).

The operating waveforms of current estimator 1 under ZVS are shown in Fig. 5. During M_1 , the PT input current i_{in} and its scaled representation v_2 remain zero since the PT input capacitor C_{in} is being charged toward V_{dc} . The current through C_{in} and its scaled version v_1 increase accordingly. Once the PT input capacitor has been fully charged, i_{in} is dominated by the resonant current i_{L1} , which flows in the reverse direction and the body diode of the MOSFET conducts during M_2 . During M_3 , v_{Cin} is maintained at V_{dc} , therefore, its derivative signal v_1 is zero. Voltages v_1 and v_2 are combined to rebuild the estimated resonant current v_{cc} , as shown in Fig. 5. A sign-detecting comparator U_1 provides feedback v_{zc} for the controller.

2) *Current Estimator 2. Antiparallel Diode Sign Detector:* Current estimator 2, as shown in Fig. 6, consists of two antiparallel diodes coupled with the input section of the PT. These diodes are used to detect the zero crossing of the resonant current. Each diode current is described by the Shockley equation

$$i_d = I_s \left(\exp \left(\frac{qv_D}{nkT_a} \right) - 1 \right) \quad (10)$$

where v_D is the voltage across the diode, T_a is the absolute temperature, k is Boltzmann's constant, n is the emission coefficient, q is the electronic charge, and I_s is the reverse saturation current.

Employing (10) to the antiparallel diodes configuration results in (neglecting the “ -1 ” term)

$$i_D = 2I_s \sinh \left(\frac{qv_D}{nkT_a} \right). \quad (11)$$

A silicon fast switching diode 1N4148 is employed in this design for an easy sign detection of the input current. The reverse-recovery time of 1N4148 is 4 ns, which is negligible in comparison with the 6 μ s switching period. There is negligible change in the conducting diode's forward voltage when the current is above 10 mA. Since this is much less than the typical current (above 50 mA), we can safely assume the forward voltage is constant and merely changes sign with current. Similar to current estimator 1, a capacitor C_2 is connected in parallel to PT input, as shown in Fig. 6, and it is chosen to be much smaller than C_{in} (e.g., ten times smaller) in order to minimize its effect on ZVS capability [2]. Note that no series resistor is required.

The antiparallel diode current and PT input capacitor current are given as follows:

$$i_{in} = i_{Cin} + i_{L1} \quad (12)$$

$$i_{Cin} = - \begin{cases} i_{L1} + i_{C2}, & M1 \\ 0, & M2, M3 \end{cases} \quad (13)$$

therefore

$$\frac{d}{dt} v_{Cin} = \frac{i_{C2}}{C_2} = \frac{i_{Cin}}{C_{in}}. \quad (14)$$

Solving (12)–(14)

$$i_D = i_{L1} \cdot \begin{cases} 1 + \frac{C_2}{C_{in}}, & M1 \\ 1, & M2, M3 \end{cases}. \quad (15)$$

Therefore, i_D and i_{L1} share the same polarity under all modes.

Circuit operating waveforms of current estimator 2 are shown in Fig. 7. During M_1 , both C_2 and C_{in} are charged toward V_{dc} and the capacitor current i_{C2} is proportional to i_{Cin} . Both i_{C2} and i_{Cin} remain zero once the total PT output capacitance is fully charged. In Fig. 7, i_D is contributed to i_{C2} and i_{Cin} during M_1 and, for the component values in Fig. 6, it is 1.1 times larger than

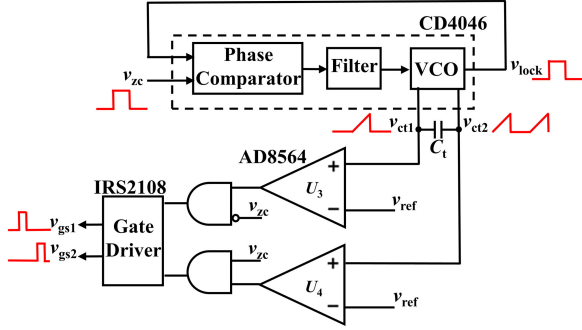


Fig. 8. PLL controller with phase-locked PWM.

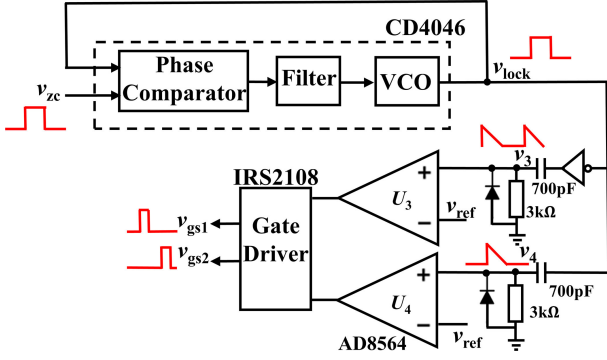


Fig. 9. PLL controller with RC time delay.

the resonant current i_{L1} , as given in (15) (since C_2 is set to be ten times larger than C_{in}). During M_2 and M_3 , i_D is dominated by i_{L1} since C_2 and C_{in} are fully charged. As shown in Fig. 7, i_D and i_{L1} share the same zero-crossing points under all modes. Since the effective signs of i_D can be indicated by the antiparallel diode voltage v_D , v_D represents the sign (i_{L1}) and so can be used by the PLL. A comparator U_1 is used to provide the feedback signal v_{zc} for the controller.

B. Steering Logic and Gate Signal Generators

1) *Phase-Locked PWM*: The PLL controller with phase-locked PWM (see Fig. 8) is implemented by employing the CD4046's timing capacitor voltage (seen as two sawtooth waveforms with 180° phase shift) as a reference signal to produce gate drive signals. The VCO has a 50% duty cycle and operates by charging the external timing capacitor C_t via a current source controlled by the VCO input signal. One side of C_t is held at ground, while the other side is charged by the current source, producing a ramp (sawtooth) waveform phase locked to the PLL input signal (i_{L1}). Once C_t charges to half of the internal logic voltage, the charged side is pulled to ground, and the other side is discharged through an internal resistor. A new half cycle begins. The voltage on each side of C_t is shown as v_{ct1} and v_{ct2} in Fig. 8. v_{ct1} and v_{ct2} act as the carrier signals for the phase offset comparators U_3 and U_4 [25], which compare a carefully valued reference voltage. Subsequently, through the combinational logic, the phase- and frequency-locked MOSFET gate drive signals are generated, featuring $\pi/2$ deadtime interval.

2) *RC Time Delay*: Fig. 9 shows an alternative implementation where the controller essentially forms an

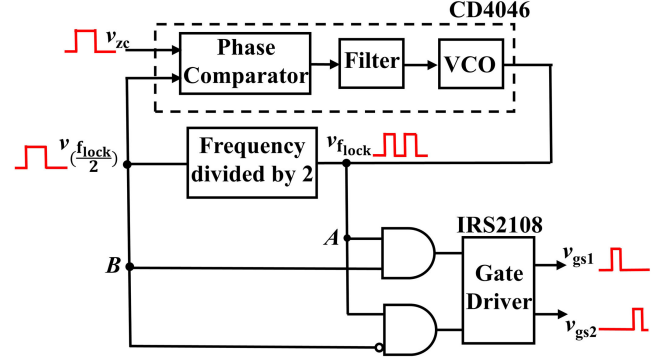


Fig. 10. PLL controller with frequency divider.

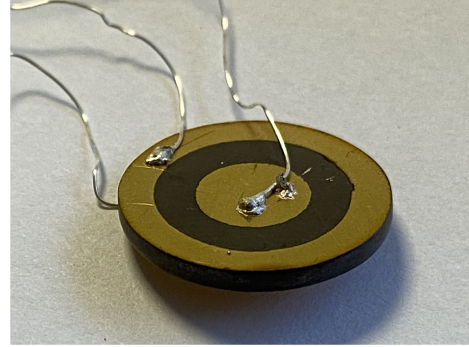


Fig. 11. Ring-dot radial-mode PT under test.

RC delay circuit by taking the PLL output v_{lock} as a reference. Once the PLL locks onto the resonant current i_{L1} , the PLL output v_{lock} follows the phase and frequency of i_{L1} . In Fig. 9, v_{lock} and its inverted version are shaped through identical RC delay circuits to trigger the gates following the correct delay. The circuit and reference voltage are arranged to provide $\pi/2$ deadtime, ensuring the high-side switch turns ON at zero phase and maintains π radians delay between the two switches.

3) *Frequency Divider*: Fig. 10 shows an alternative approach where the PLL controller is implemented by employing a frequency divider to the feedback path between the VCO output v_{flock} and the phase comparator input v_{zc} . A D-type flip flop is used for the frequency divider. The VCO operates at twice the switching frequency, and its halved version is used to drive the half bridge. With VCO output v_{flock} (or A) and frequency divider output $v_{(f_{lock}/2)}$ (or B), the corresponding in-phase gate drive signals with $\pi/2$ phase shift are generated through combinational logic, according to these Boolean equations

$$v_{gs1} = A \cdot B \quad (16)$$

$$v_{gs2} = A \cdot \bar{B}. \quad (17)$$

IV. RESULTS AND ANALYSIS

To show the validation of the proposed control methods, a prototype resonant converter is implemented using a radial-mode PT presented in previous work [35], [36], as shown in Fig. 11, with the following extracted equivalent circuit component values at a matched load condition: $C_{in} = 0.43$ nF; $C_{out} = 1.14$ nF;

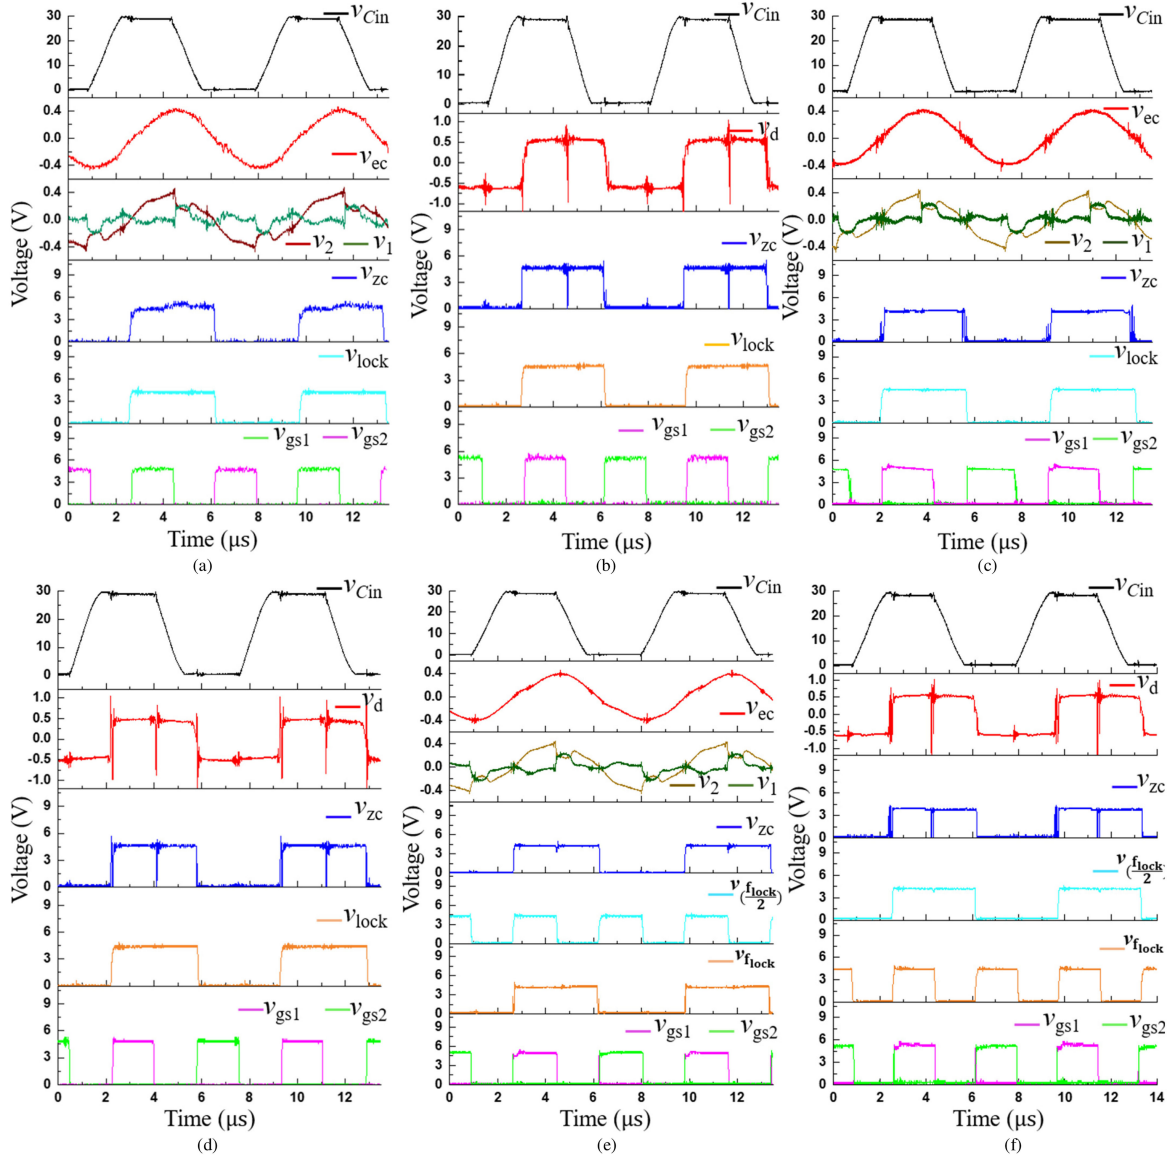


Fig. 12. Experimental results of the proposed control methods. Phase-locked PWM with (a) current estimator 1 and (b) current estimator 2. RC time delay controller with (c) current estimator 1 and (d) current estimator 2. Frequency divider controller with (e) current estimator 1 and (f) current estimator 2.

$L_1 = 17.2$ mH; $C_1 = 77.8$ pF; $R_1 = 12.5$ Ω ; $N = 0.94$; and $Q = 1190$. The experimental waveforms are shown in Fig. 12.

In these implementations, we use a low supply voltage (30 V) to compensate for the low-noise environment of testing laboratory in comparison with typical applications (such as auxiliary supplies in proximity to noisy switching circuits). This does not affect the current sensing and steering logic performance as sensing components are sized to the current (e.g., the current-sense resistor is sized to provide a certain voltage) and the PLL operates at typical logic voltages regardless of load requirements.

For all cases, the PLL internal LPF, which has a corner frequency of 400 kHz, is used to compensate the loop and to minimize the phase error. For the phase-locked PWM [see Fig. 12(a) and (b)] and the RC time delay [see Fig. 12(c) and (d)] steering logic implementations, the VCO is restricted to operate between 135 and 145 kHz by a 410 pF timing capacitor, 50 k Ω

timing resistor, and a 200 k Ω frequency offset resistor to ensure adequate lock and capture range while still accommodating component tolerances. For the frequency divider implementation [see Fig. 12(e) and (f)], the VCO is setup to cover a lock and capture range of 270–290 kHz (i.e., covering twice the resonant frequency) by a 220 pF timing capacitor, 90 k Ω timing resistor, and 500 k Ω frequency offset resistor. As shown in Fig. 12, for all cases, the two inputs of the phase comparator of the CD4046 have identical phase and frequency, indicating the PLL-locked condition. The zero-crossing points of the resonant current are clearly shown by the rising and falling edge of v_{zc} . Subsequently, gate signals v_{gs1} and v_{gs2} are generated through the appropriate steering logic and driver circuits.

All the results show ZVS achieved (indicated by the v_{Cin} rise completing during the deadtime). As these experiments were performed for the matched load, which is the worst-case condition, they demonstrate the ZVS capability of the

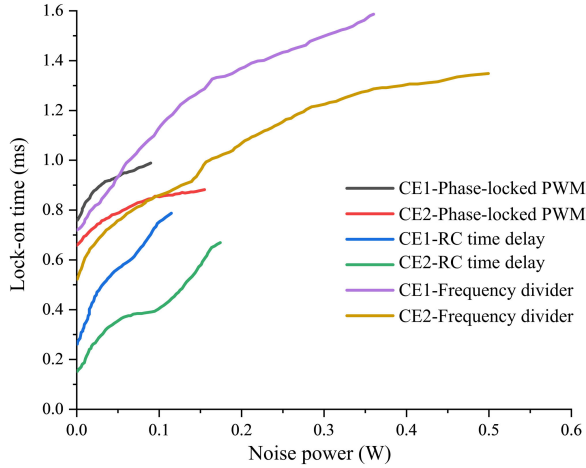


Fig. 13. Lock-on time comparison of the proposed PLL controllers associated with current estimator 1 (CE1) and current estimator 2 (CE2) under noise condition.

implementations for all loads. This is to be expected as the radial-mode PT was designed to meet the critical criterion (see [30]). In each case, v_{zc} , the detected current phase, has clean edges that align with the detected current and the gate signals. Although the noise is not negligible, the results show good agreement with the simulation results (see Figs. 5 and 7), confirming the accuracy of the simulation.

A. Tracking Performance

1) *Noise Immunity*: To indicate the resonant-frequency tracking performance of all six methods, the white noise of varying power is applied to the comparator input of the PLL in simulation and the time taken to lock on is measured. The simulation test conditions are those in Fig. 4 and the noise power is measured with respect to 1Ω . The results are given in Fig. 13, where the graphs end prematurely, this is because lock-on was not possible at that level of noise power (i.e., lock-on time was infinite). As can be seen, current estimator 2 (CE2) shows better noise tolerance than current estimator 1 (CE1) regardless of the PLL controller type. The frequency divider controller with CE2 gives the best result overall and is able to handle up to 0.50 W noise power. In terms of the lock-on time, at a given noise power level, CE2 shows a shorter lock-on time than CE1 for all three steering logic implementations.

The controller noise immunity is significantly improved by the frequency divider approach. This can be explained as when the noise power level increases, VCO will be affected and appear as phase noise on the output of the VCO. In general, phase noise can be generated by PLL itself (e.g., phase detector dominates the noise source within the loop bandwidth, while VCO is the dominant noise source outside the loop bandwidth), frequency divider, and the resonant circuit [37]. Phase noise from frequency division is negligible when the division ratio is small, and it is insignificant when PLL operates at low frequencies. Therefore, the overall PLL noise performance is mainly determined by the resonant circuit [38]. The noise reduction for a given frequency division is $20 \log_{10} N$, where N is the division ratio [37]. Hence, a frequency divide-by-two results in an improvement of 6 dB (or

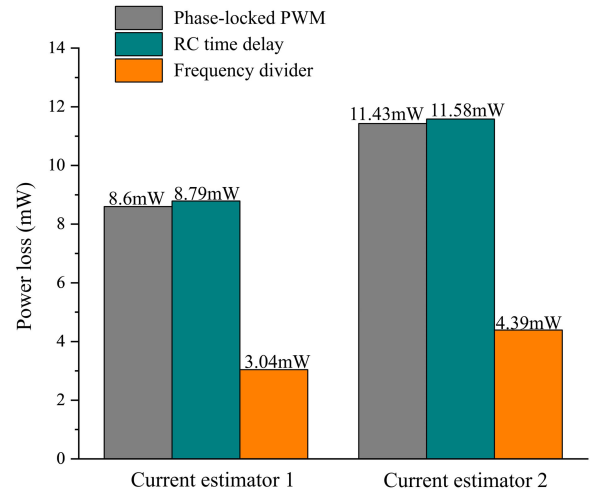


Fig. 14. Power loss comparison of current estimator 1 (CE1) and current estimator 2 (CE2).

$20 \log_{10} 2$) for phase noise correlated with the carrier frequency (VCO center frequency), and 3 dB (or $10 \log_{10} 2$) improvement for the uncorrelated phase noise [38], making a practical and effective way to reduce the phase noise of the PLL.

Although CE2 has advantages over CE1 in terms of lock-on time and system noise immunity, as indicated in Fig. 13, it experiences larger power consumption compared with CE1 for each PLL controller. To ensure a fair comparison, the forward voltage of the antiparallel diode is modified such that the peak-to-peak value of v_d matches that of the estimated current v_{ec} for each PLL steering logic implementations.

As can be seen in Fig. 14, the frequency divider controller shows the lowest power loss amongst those three controllers, with 3.04 mW for CE1 and 4.39 mW for CE2. The RC time delay controller gives the largest power consumption with 8.79 mW and 11.58 mW for CE1 and CE2, respectively. These results neglect the power loss in the PLL or logic gates, but those are likely to be similar for all implementations.

Even though the resonant current flow through the circuit with CE1 and CE2 is almost the same, the antiparallel diodes in CE2 require nearly 0.9 V to be fully turned ON in practice. In contrast, the sensing resistors R_A and R_B in Fig. 4 provide relatively small sensing voltages v_1 and v_2 to indicate the zero-crossing points, as shown in Fig. 5. Therefore, CE2 consumes more power than CE1 for practical implementation.

2) *System Initialization Time*: The system initialization time of the proposed control method using phase-locked PWM, RC time-delay, or frequency divider together with CE2 is compared with previous art and shown in Fig. 15. In this simulation test, we implemented each solution in simulation software for analog circuits (SPICE) without noise. To ensure a fair comparison, the time scale is presented in terms of switching period, and v_{Cin} is normalized to unity.

In Fig. 15, the top plot shows the start-up period of a fixed deadtime control presented in [2]. Seven cycles are required for the switching voltage to reach the positive rail during a single deadtime whereafter, the system reaches a steady state. The second plot from the top shows a dynamically-adjusted control

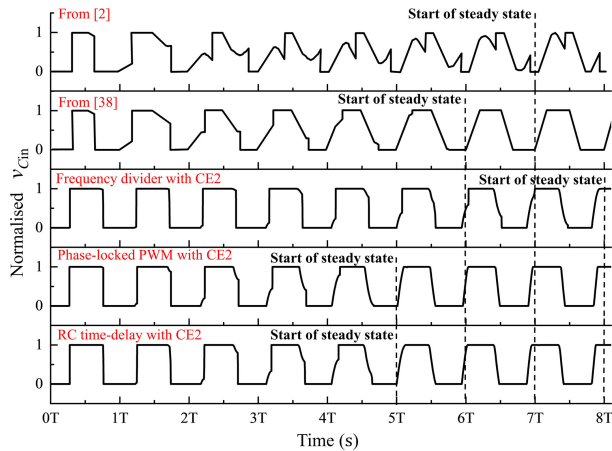


Fig. 15. Comparison of system initialization time: top plot from [2], second top plot from [39], bottom three plots from frequency divider, phase-locked PWM, or RC time delay control, respectively, using CE2.

design presented in [39] with six cycles required to reach V_{dc} in a single deadtime.

The proposed method using the phase-locked PWM or RC time delay logic with antiparallel diode current estimator, shown in the bottom plot, show improved performance in terms of reaching the steady state with a reduced lock-on period. Five cycles enable the PT input voltage to meet the positive rail in a single deadtime. For [2] and [39], the optimum deadtime is detected in each resonant cycle and a total feedback loop phase angle of integer multiple of 2π is satisfied; therefore, dynamic phase compensation is necessary every time the resonant frequency changes, which is not desirable for fast tracking.

The proposed methods show best performance since, during the system start up, the VCO initially works at its minimum frequency, which is set to be near the resonant frequency. Thus, the PT should be excited and operated in the resonant modes more quickly. For a practical implementation of the PT-based converter control, when changes in optimum operating frequency caused by load and temperature variation are considered, our method is more advantageous since the PLL controller is able to lock on to the optimum frequency irrespective of the operating conditions and temperature effects. Fewer lock-on periods enable the fast tracking of the optimum frequency, thereby, improving the overall system efficiency. In addition, both phase-locked PWM and RC time delay implementations require five cycles to reach the steady state, performing better than the frequency divider approach, which requires eight cycles.

In terms of the flexible control of dead time, the phase-locked PWM and RC time delay approaches also perform better than the frequency divider approach. This is highly desirable when the output voltage regulation is required for a practical implementation of a PT-based power supply. Approaches for regulating the output voltage reported in the literature include: employing a hysteresis controller [6]; operating frequency modulation (thereby changing the reactance of the resonant tank) [40]; and, adjusting the deadtime [14], [39] (hence, the duty cycle).

In [41], it is indicated that it is difficult to regulate the output voltage while achieving ZVS with deadtime control and frequency control simultaneously. The proposed phase-locked

TABLE I
SUMMARY OF DIFFERENT CONTROL APPROACHES

	Phase locked PWM		RC time delay		Frequency divider	
	CS1	CS2	CS1	CS2	CS1	CS2
Flexibility	Symmetrical and adjustable deadtime		Symmetrical, asymmetrical adjustable deadtime		Fixed deadtime	
Start-up time	5 cycles		5 cycles		8 cycles	
VCO range	10kHz		10kHz		40kHz	
Maximum circuit noise tolerance (W)	0.09	0.16	0.11	0.17	0.36	0.50
Number of lock-on cycles at maximum noise level	139.79	124.26	110.14	93.19	224.51	190.62
Power loss(mW)	8.6	11.43	8.79	11.58	3.04	4.39

PWM and RC time delay approaches show potential advantages for a simple and flexible deadtime control to regulate the output since the deadtime interval can be controlled both symmetrically and asymmetrically by adjusting the reference voltages.

The overall performance of all six control approaches are summarized in Table I. The choice of control approach must be taken holistically, bearing in mind the need for flexibility, noise immunity, system complexity, and tracking speed.

Although the control circuit presented was designed for PT-based inductorless resonant converters, the findings are likely to be generally applicable to other resonant converters [25], [42], [43] because this approach provides precise phase detection, wide frequency-locking range, adjustable deadtime, small time delay, and ease of implementation.

V. CONCLUSION

A PLL-based control system for achieving the ZVS operation in a PT-based resonant power supply was presented. The cooperation between the current estimation circuits and PLL controller feedback design was described in detail. By measuring the zero-crossing points of the estimated current, the switching waveforms are locked on to the resonant current while simultaneously ensuring $\pi/2$ radians deadtime and, hence, achieving ZVS for all loads. The control system is implemented using different current estimation circuits with steering logic and gate signal generators based on CD4046 PLL. A ring-dot radial-mode PT with a matched resistive load was used and both simulation and experimental results demonstrated a successful ZVS operation. Six implementations were presented and evaluated, each with its own advantages in terms of flexibility, circuit noise condition, power consumption, and lock-on time. The phase-locked PWM and RC time-delay approaches show excellent system initialization performance with only five cycles required to achieve steady state. This ensures a fast tracking of resonant frequency change. Frequency divider control performs better at circuit noise immunity and has potential advantages for high-frequency operation. In addition, CE2 experiences shorter lock-on time under noise conditions and has higher circuit noise tolerance.

REFERENCES

- [1] Y.-P. Liu, D. Vasic, F. Costa, and D. Schwander, "Piezoelectric 10 W DC/DC converter for space applications," in *Proc. 14th Eur. Conf. Power Electron. Appl.*, Birmingham, U.K., 2011, pp. 1–7.
- [2] M. S. Rødgaard, M. A. E. Andersen, and E. Bruun, "Piezoelectric transformer based power converters; design and control," Ph.D. dissertation, Dept. Elect. Eng., Tech. Univ. Denmark, Kongens Lyngby, Denmark, 2012.
- [3] J. Navas, T. Bove, J. A. Cobos, F. Nuno, and K. Brebol, "Miniaturised battery charger using piezoelectric transformers," in *Proc. 16th Annu. IEEE Appl. Power Electron. Conf. Expo.*, Anaheim, CA, USA, 2001, pp. 492–496.
- [4] Y. C. Wang, J. J. He, Y. P. Liu, J. Wu, C. K. Lee, and Y. T. Huang, "Theory and experiment of high voltage step-up ratio disk type piezoelectric transformer for LCD-TV," in *Proc. IEEE Int. Conf. Mechatron.*, Taipei, Taiwan, 2005, pp. 284–287.
- [5] A. V. Carazo, "50 years of piezoelectric transformers. Trends in the technology," in *Proc. Symp. D Mater. Devices Smart Syst.*, 2003, vol. 785, pp. 33–44.
- [6] J. Díaz, F. Nuno, M. J. Prieto, J. A. Martín-Ramos, and P. J. Villegas Saiz, "Closing a second feedback loop in a dc-dc converter based on a piezoelectric transformer," *IEEE Trans. Power Electron.*, vol. 22, no. 6, pp. 2195–2201, Nov. 2007.
- [7] E. M. Baker, W. Huang, D. Y. Chen, and F. C. Lee, "Radial mode piezoelectric transformer design for fluorescent lamp ballast applications," *IEEE Trans. Power Electron.*, vol. 20, no. 5, pp. 1213–1220, Sep. 2005.
- [8] S. Ben-Yaakov and S. Lineykin, "Maximum power tracking of piezoelectric transformer HV converters under load variations," *IEEE Trans. Power Electron.*, vol. 21, no. 1, pp. 73–78, Jan. 2006.
- [9] S. Bronstein, "Piezoelectric transformers in power electronics," Ph.D. dissertation, Dept. Elect. Comput. Eng., Ben-Gurion Univ. Negev, Be'er Sheva, Israel, 2005.
- [10] A. M. Flynn and S. R. Sanders, "Fundamental limits on energy transfer and circuit considerations for piezoelectric transformers," *IEEE Trans. Power Electron.*, vol. 17, no. 1, pp. 8–14, Jan. 2002.
- [11] A. V. Carazo, "Piezoelectric transformers: An historical review," in *Actuators*, vol. 5. Basel, Switzerland: Multidisciplinary Digit. Publishing Inst., 2016, pp. 12–24.
- [12] E. L. Horsley, M. P. Foster and D. A. Stone, "State-of-the-art piezoelectric transformer technology," in *Proc. Eur. Conf. Power Electron. Appl.*, Aalborg, Denmark, 2007, Art. no. 12.
- [13] M. Ekhtiari, Z. Zhang, and M. A. E. Andersen, "State-of-the-art piezoelectric transformer-based switch mode power supplies," in *Proc. 40th Annu. Conf. IEEE Ind. Electron. Soc.*, Dallas, TX, USA, 2014, pp. 5072–5078.
- [14] M. S. Roedgaard, M. Weirich, and M. A. E. Andersen, "Forward conduction mode controlled piezoelectric transformer-based PFC LED drive," *IEEE Trans. Power Electron.*, vol. 28, no. 10, pp. 4841–4849, Oct. 2013.
- [15] K. S. Meyer, M. A. E. Andersen, and F. Jensen, "Parameterized analysis of zero voltage switching in resonant converters for optimal electrode layout of piezoelectric transformers," in *Proc. IEEE Power Electron. Spec. Conf.*, Rhodes, Greece, 2008, pp. 2543–2548.
- [16] M. Khanna, R. Burgos, Q. Wang, K. D. T. Ngo, and A. V. Carazo, "New tunable piezoelectric transformers and their application in dc-dc converters," *IEEE Trans. Power Electron.*, vol. 32, no. 12, pp. 8974–8978, Dec. 2017.
- [17] M. Ryu, S. Choi, S. Lee, and B. H. Cho, "A new piezoelectric transformer driving topology for universal input AC/DC adapter using a constant frequency PWM control," in *Proc. 21st Annu. IEEE Appl. Power Electron. Conf. Expo.*, Dallas, TX, USA, 2006, pp. 4–10.
- [18] S. Choi, M. Ryu, S. Lee, and B. H. Cho, "Adaptive frequency control strategy for piezoelectric transformer in AC/DC adapter applications using phase-detector," in *Proc. 21st Annu. IEEE Appl. Power Electron. Conf. Expo.*, Dallas, TX, USA, 2006, pp. 1296–1299.
- [19] J. Diaz, M. J. Prieto, F. Nuño, J. A. Martín-Ramos, and J. A. Martínez, "Driving piezoelectric-transformer-based DC/DC converters using pulse density modulation," in *Proc. IEEE Energy Convers. Congr. Expo.*, Cincinnati, OH, USA, 2017, pp. 5698–5703.
- [20] S. T. Yun, J. M. Sim, J. H. Park, S. J. Choi, and B. H. Cho, "Adaptive phase control method for load variation of resonant converter with piezoelectric transformer," in *Proc. 7th Int. Conf. Power Electron. Drive Syst.*, Bangkok, Thailand, 2007, pp. 164–168.
- [21] S. Hamamura, D. Kurose, T. Ninomiya, and M. Yamamoto, "New control method of piezoelectric transformer converter by PWM and PFM for wide range of input voltage," in *Proc. 7th IEEE Int. Power Electron. Congr.*, Acapulco, Mexico, 2000, pp. 3–8.
- [22] B. Ju, W. Shao, D. Huang, Y. Ye, and Z. Feng, "A topology for inductorless actuation of piezoelectric transformer with special driving waveform," *IEEE Trans. Power Electron.*, vol. 32, no. 2, pp. 1346–1354, Feb. 2017.
- [23] G. Ivensky, I. Zafrany, and S. Ben-Yaakov, "Generic operational characteristics of piezoelectric transformers," *IEEE Trans. Power Electron.*, vol. 17, no. 6, pp. 1049–1057, Nov. 2002.
- [24] C.-Y. Lin, "Design and analysis of piezoelectric transformer converters," Ph.D. dissertation, Dept. Elect. Eng., Virginia Polytech. Inst. State Univ., Blacksburg, VA, USA, 1997.
- [25] A. J. Gilbert, M. P. Foster, D. A. Stone, and C. M. Bingham, "Phase locked loop (PLL) based self-oscillating controller for LCC resonant converters," in *Proc. 4th IET Conf. Power Electron., Mach. Drives*, York, U.K., 2008, pp. 446–450.
- [26] M. Ekhtiari, T.-G. Zsurzsan, M. A. E. Andersen, and Z. Zhang, "Optimum phase shift in the self-oscillating loop for piezoelectric-transformer-based power converters," *IEEE Trans. Power Electron.*, vol. 33, no. 9, pp. 8101–8109, Sep. 2018.
- [27] E. Minazara, D. Vasic, and F. Costa, "Comparing piezoelectric transformer working with PLL and with nonlinear load approaches in DC-DC converter," in *Proc. Eur. Conf. Power Electron. Appl.*, Aalborg, Denmark, 2007, pp. 1–10.
- [28] M. J. Prieto, J. Díaz, J. A. Martín, and F. Nuno, "A very simple DC/DC converter using piezoelectric transformer," in *Proc. IEEE 32nd Annu. Power Electron. Spec. Conf.*, Vancouver, BC, Canada, 2001, pp. 1755–1760.
- [29] J. M. Alonso, C. Ordiz, and M. A. D. Costa, "A novel control method for piezoelectric-transformer based power supplies assuring zero-voltage-switching operation," *IEEE Trans. Ind. Electron.*, vol. 55, no. 3, pp. 1085–1089, Mar. 2008.
- [30] M. P. Foster, J. N. Davidson, E. L. Horsley, and D. A. Stone, "Critical design criterion for achieving zero voltage switching in inductorless half-bridge-driven piezoelectric-transformer-based power supplies," *IEEE Trans. Power Electron.*, vol. 31, no. 7, pp. 5057–5066, Jul. 2016.
- [31] M. S. Rødgaard, "Bi-directional piezoelectric transformer-based converter for high-voltage capacitive applications," in *Proc. IEEE Appl. Power Electron. Conf. Expo.*, Charlotte, NC, USA, 2015, pp. 1993–1998.
- [32] M. P. Mason, *Electromechanical Transducers and Wave Filters*. New York, NY, USA: Van Nostrand, 1942.
- [33] M. Ekhtiari, T. Andersen, Z. Zhang, and M. A. E. Andersen, "Digitized self-oscillating loop for piezoelectric transformer-based power converters," in *Proc. IEEE Appl. Power Electron. Conf. Expo.*, Long Beach, CA, USA, 2016, pp. 1430–1436.
- [34] E. L. Horsley, A. V. Carazo, N. Nguyen-Quang, M. P. Foster, and D. A. Stone, "Analysis of inductorless zero-voltage-switching piezoelectric transformer-based converters," *IEEE Trans. Power Electron.*, vol. 27, no. 5, pp. 2471–2483, May 2012.
- [35] J. Forrester, J. Davidson, and M. Foster, "Effect of spurious resonant modes on the operation of radial mode piezoelectric transformers," in *Proc. Int. Exhib. Conf. Power Electron., Intell. Motion, Renewable Energy Management*, Nuremberg, Germany, 2018, pp. 1–8.
- [36] J. Forrester, J. Davidson, M. Foster, and D. Stone, "Equivalent circuit parameter extraction methods for piezoelectric transformers," in *Proc. 21st Eur. Conf. Power Electron. Appl.*, Genova, Italy, 2019, pp. 1–10.
- [37] R. Best, *Phase locked loops: Design, simulation, and applications*, 5th Ed. New York, NY, USA: McGraw-Hill, 2003.
- [38] D. Banerjee, *PLL Performance, Simulation, and Design*, 5th ed. Indianapolis, IN, USA: Dog Ear, 2006.
- [39] M. Ekhtiari, T. Andersen, M. A. E. Andersen, and Z. Zhang, "Dynamic optimum dead time in piezoelectric transformer-based switch-mode power supplies," *IEEE Trans. Power Electron.*, vol. 32, no. 1, pp. 783–793, Jan. 2017.
- [40] T. Zaitso, T. Shigehisa, T. Inoue, M. Shoyama, and T. Ninomiya, "Piezoelectric transformer converter with frequency control," in *Proc. 17th Int. Telecommun. Energy Conf.*, The Hague, Netherlands, 1995, pp. 175–180.
- [41] M. Radecker, F. Bisogno, and M. Herfurth, "Control circuit for a switch unit of a clocked power supply circuit, and resonance converter," U.S. Patent US7 746 671, Jun. 29, 2010.
- [42] M. P. Foster, H. I. Sewell, C. M. Bingham, D. A. Stone, and D. Howe, "Methodologies for the design of LCC voltage-output resonant converters," *IEEE Proc. Electr. Power Appl.*, vol. 153, no. 4, pp. 559–567, Jul. 2006.
- [43] R.-L. Lin and W.-C. Ju, "LLC DC/DC resonant converter with PLL control scheme," in *Proc. 22nd Annu. IEEE Appl. Power Electron. Conf. Expo.*, Anaheim, CA, USA, 2007, pp. 1537–1543.



Zijiang Yang received the M.Sc. degree in electronic and electrical engineering from the University of Manchester, Manchester, U.K., in 2015. He is currently working toward the Ph.D. degree with the Department of Electronic and Electrical Engineering, University of Sheffield, Sheffield, U.K.

His research interests include the modeling and control of piezoelectric transformer-based resonant power supplies.



Jack Forrester received the M.Eng. degree in electrical and electronic engineering from the University of Sheffield, Sheffield, U.K., in 2017. He is currently working toward the Ph.D. degree in the area of piezoelectric transformer-based power converters, with a focus on transformer design and characterization, University of Sheffield, Sheffield, U.K.



Jonathan N. Davidson received the M.Eng. degree in electronic engineering and the Ph.D. degree in thermal modeling and management from the University of Sheffield, Sheffield, U.K., in 2010 and 2015, respectively.

He joined the University of Sheffield as a Member of Academic Staff in 2015. His research interests include the thermal modeling and management of power electronics, piezoelectric transformers, resonant converters, electrical metrology in sewerage systems, and plasma-generating electronics.



Martin P. Foster received the B.Eng. degree in electronic and electrical engineering, the M.Sc. (Eng.) degree in control systems, and the Ph.D. degree in power electronics from the University of Sheffield, Sheffield, U.K., in 1998, 2000, and 2003, respectively.

In 2003, he became a Member of Academic Staff with the University of Sheffield specializing in power electronic systems and was became Senior Lecturer in 2010, Reader in 2014, and Professor of Energy Storage and Conversion in 2017. His current research interests include the modeling and control of switching power converters, resonant power supplies, multilevel converters, energy storage management systems, piezoelectric transformers and power electronic packaging, and thermal management.



David A. Stone received the B.Eng. degree in electronic engineering from the University of Sheffield, Sheffield, U.K., in 1984 and the Ph.D. degree from Liverpool University, Liverpool, U.K., in 1989.

He joined the Electrical Machines and Drives Group with the University of Sheffield, where he is currently a Professor of Electrical Engineering. His research interests include battery management, energy storage and conversion, and energy utilization and power electronic applications, including dc-dc and motor drive systems.